


2024/05/15 2103Z

RJTY FKE **V22** MQE **Z13** AKESI **Y111** CRANE **V35** KSE **V3** TBE **B932** SMA **J179** SQA **J501** TORTE PANC

3057.25 nm / 5662.03 km

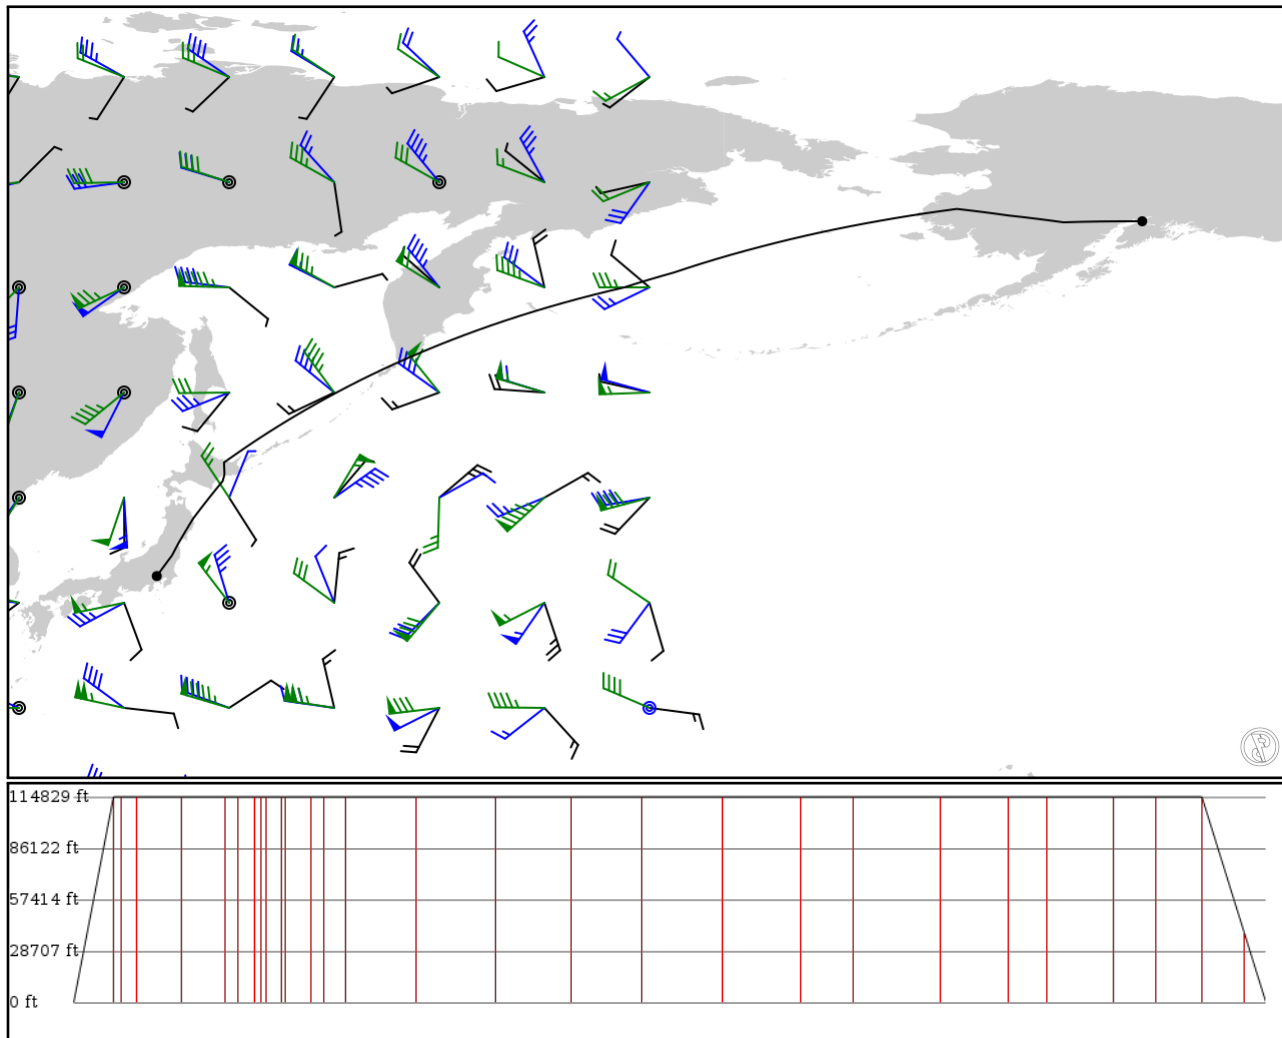

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJTY	-	35.74850	0 ft	-	YOKOTA AB
APT	-	139.34800	0 m		
FKE	-	37.22430	35,000 ft	103	FUKUSHIMA
VOR	-	140.43700	10,668 m		
HERON	V22	37.53220	35,000 ft	20	-
FIX	AWY-HI	140.59900	10,668 m		
SDE	V22	38.13860	35,000 ft	39	SENDAI
VOR	AWY-HI	140.92100	10,668 m		
MQE	V22	39.86560	35,000 ft	114	MIYAKO
VOR	AWY-HI	141.95100	10,668 m		
HOKTO	Z13	41.46740	35,000 ft	111	-
FIX	AWY-HI	143.19000	10,668 m		
HIROO	Z13	41.96730	35,000 ft	35	-
FIX	AWY-HI	143.59200	10,668 m		
AKESI	Z13	42.55460	35,000 ft	41	-
FIX	AWY-HI	144.07300	10,668 m		
CRANE	Y111	42.82130	35,000 ft	16	-
FIX	AWY-HI	144.14600	10,668 m		
KSE	V35	43.03380	35,000 ft	13	KUSHIRO
VOR	AWY-HI	144.20400	10,668 m		
D187J	V3	43.71830	35,000 ft	41	-
FIX	AWY-HI	144.17400	10,668 m		
TBE	V3	43.88490	35,000 ft	10	MEMANBETSU
VOR	AWY-HI	144.16600	10,668 m		
ODERI	B932	44.65000	35,000 ft	65	-
FIX	AWY-HI	145.25600	10,668 m		
NOTLU	B932	45.02140	35,000 ft	32	-
FIX	AWY-HI	145.79500	10,668 m		
DONIS	B932	45.64670	35,000 ft	54	-
FIX	AWY-HI	146.73300	10,668 m		
NETRI	B932	47.65500	35,000 ft	180	-
FIX	AWY-HI	150.00100	10,668 m		
OTLER	B932	49.80310	35,000 ft	203	-
FIX	AWY-HI	153.97900	10,668 m		
RIMLI	B932	51.70500	35,000 ft	194	-
FIX	AWY-HI	158.11500	10,668 m		
RAPAK	B932	53.35670	35,000 ft	182	-
FIX	AWY-HI	162.31600	10,668 m		
DIPNA	B932	55.03940	35,000 ft	207	-
FIX	AWY-HI	167.48800	10,668 m		
BAMOK	B932	56.42500	35,000 ft	198	-
FIX	AWY-HI	172.82200	10,668 m		
MORLY	B932	57.49880	35,000 ft	134	-
FIX	AWY-HI	176.41400	10,668 m		
EPLOS	B932	59.35540	35,000 ft	225	-
FIX	AWY-HI	-177.33600	10,668 m		
KIVAK	B932	60.58330	35,000 ft	174	-
FIX	AWY-HI	-172.08300	10,668 m		
LESAD	B932	61.18590	35,000 ft	98	-
FIX	AWY-HI	-168.93600	10,668 m		
SMA	B932	62.05940	35,000 ft	169	SAINT MARY'S
NDB	AWY-HI	-163.28200	10,668 m		
ANI	J179	61.59020	35,000 ft	108	ANIAK

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
NDB	AWY-HI	-159.59800	10,668 m		
SQA	J179	61.09860	35,000 ft	117	SPARREVOHN
VOR	AWY-HI	-155.63500	10,668 m		
TORTE	J501	61.17080	11,900 ft	107	-
FIX	AWY-HI	-151.92700	3,627 m		
PANC	-	61.17430	0 ft	55	Ted Stevens Anchorage Intl
APT	-	-149.99800	0 m		

RJTY

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 1

Elevation: 459 ft / 140 m
Location: 35.748500 139.348000
Magnetic Var: 7.939 W

METAR

RJTY 152025Z 33004KT 3SM -RA BR OVC008 16/15 A2977 RMK AO2A RAE06DZB06E24RAB24 CIG 007 RWY18 SLP083 \$

TAF

TAF RJTY 151300Z 1513/1619 VRB06KT 8000 -RA FEW005 BKN015 OVC030 QNH2992INS BECMG 1517/1518 32007KT 4800 -RA BR SC

Frequencies

REC - 128.40 MHz - ATIS
TWR - 134.30 MHz -
DEP - 122.10 MHz -
GND - 133.20 MHz -
APP - 118.30 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	200 ft	11,028 ft	170.34	CONCRETE	0 ft	1,001 ft
	61 m	3,361 m	178.28		0 m	305 m
36	200 ft	11,028 ft	350.34	CONCRETE	0 ft	1,001 ft
	61 m	3,361 m	358.28		0 m	305 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18	LOC-ILS	YAS	108.70 MHz	18 nm	170.33	-	408 ft
				33 km	178.27		408 m
36	LOC-ILS	IYOK	109.70 MHz	18 nm	350.33	-	462 ft
				33 km	358.27		462 m
18	GS	YAS	108.70 MHz	10 nm	170.67	3.00	452 ft
				19 km	178.61		452 m
36	GS	IYOK	109.70 MHz	10 nm	350.67	2.50	421 ft
				19 km	358.61		421 m

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.020 E

METAR

PANC 151953Z 31006KT 10SM FEW050 FEW070 SCT080 SCT250 09/02 A2999

TAF

PANC 151722Z 1518/1624 VRB04KT P6SM SKC FM152100 25008KT P6SM SKC FM160100 25012KT P6SM SKC FM160800 18008KT P6SM

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.82		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.88		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.86		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.91		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.87		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.88		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.85		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.88		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.88		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.85		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.88		151 m