


2024/06/06 0316Z

MYNN ZBV KFLL

158.29 nm / 293.16 km

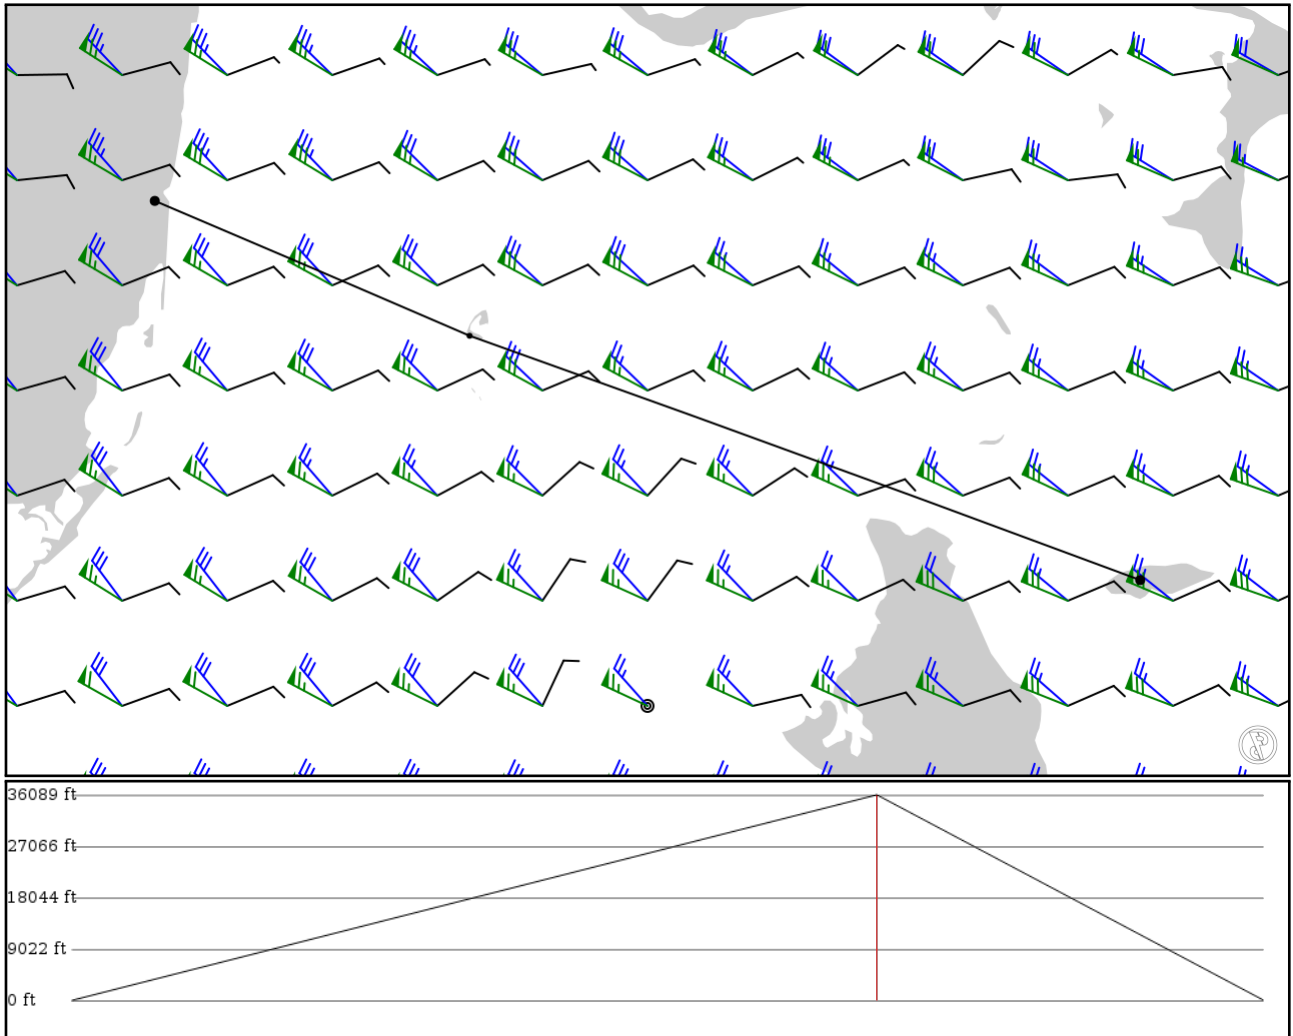

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 28000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
MYNN	-	25.03860	0 ft	-	Nassau Intl	
APT	-	-77.46662	0 m			
ZBV	-	25.70417	11,000 ft	106	BIMINI VORTAC	
VOR	-	-79.29444	3,353 m			
KFLL	-	26.07164	0 ft	51	Fort Lauderdale Hollywood Intl	
APT	-	-80.15269	0 m			

MYNN

Region: BAHAMAS
Timezone: AMERICA/NASSAU
Runways: 2

Elevation: 16 ft / 5 m
Location: 25.038700 -77.466800
Magnetic Var: 8.787 W

METAR

MYNN 060300Z 00000KT 9999 -SHRA SCT015 SCT032 BKN120 26/25 A2995

TAF

TAF MYNN 052230Z 0600/0700 11004KT 9999 SCT022 BECMG 0613/0615 13008KT PROB30 TEMPO 0616/0620 VCSH SCT018CB

Frequencies

REC - 118.70 MHz - ATIS	CLD - 118.30 MHz - NASSAU CLEARANCE
GND - 121.70 MHz - NASSAU GROUND	TWR - 119.50 MHz - NASSAU TOWER
APP - 121.00 MHz - NASSAU APPROACH	APP - 125.30 MHz - NASSAU APPROACH
DEP - 121.00 MHz - NASSAU DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14	151 ft	11,136 ft	134.80	CONCRETE	210 ft	0 ft
	46 m	3,394 m	143.59		64 m	0 m
32	151 ft	11,136 ft	314.81	CONCRETE	0 ft	0 ft
	46 m	3,394 m	323.60		0 m	0 m
10	151 ft	8,282 ft	89.67	CONCRETE	0 ft	0 ft
	46 m	2,524 m	98.46		0 m	0 m
28	151 ft	8,282 ft	269.68	CONCRETE	0 ft	0 ft
	46 m	2,524 m	278.47		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14	LOC-ILS	IZQA	110.10 MHz	18 nm	134.83	-	7 ft
				33 km	143.62		7 m
14	GS	IZQA	110.10 MHz	10 nm	135.66	3.00	8 ft
				19 km	144.45		8 m

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.397 W

METAR

KFLL 060253Z 12011KT 10SM FEW021 SCT250 29/24 A2991 RMK A02 SLP125 T02890239 53018

TAF

TAF AMD KFLL 060232Z 0603/0706 12009KT P6SM FEW030 SCT250 FM060500 VRB04KT P6SM SCT030 SCT250 FM061500 12009KT P6SM

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.77		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.76		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.77		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.76		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.73		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.73		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.76		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.76		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.73		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.73		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.76		62 m