


2024/05/03 1552Z

KPTW WEARD **V489** ALB KBTV

277.34 nm / 513.64 km

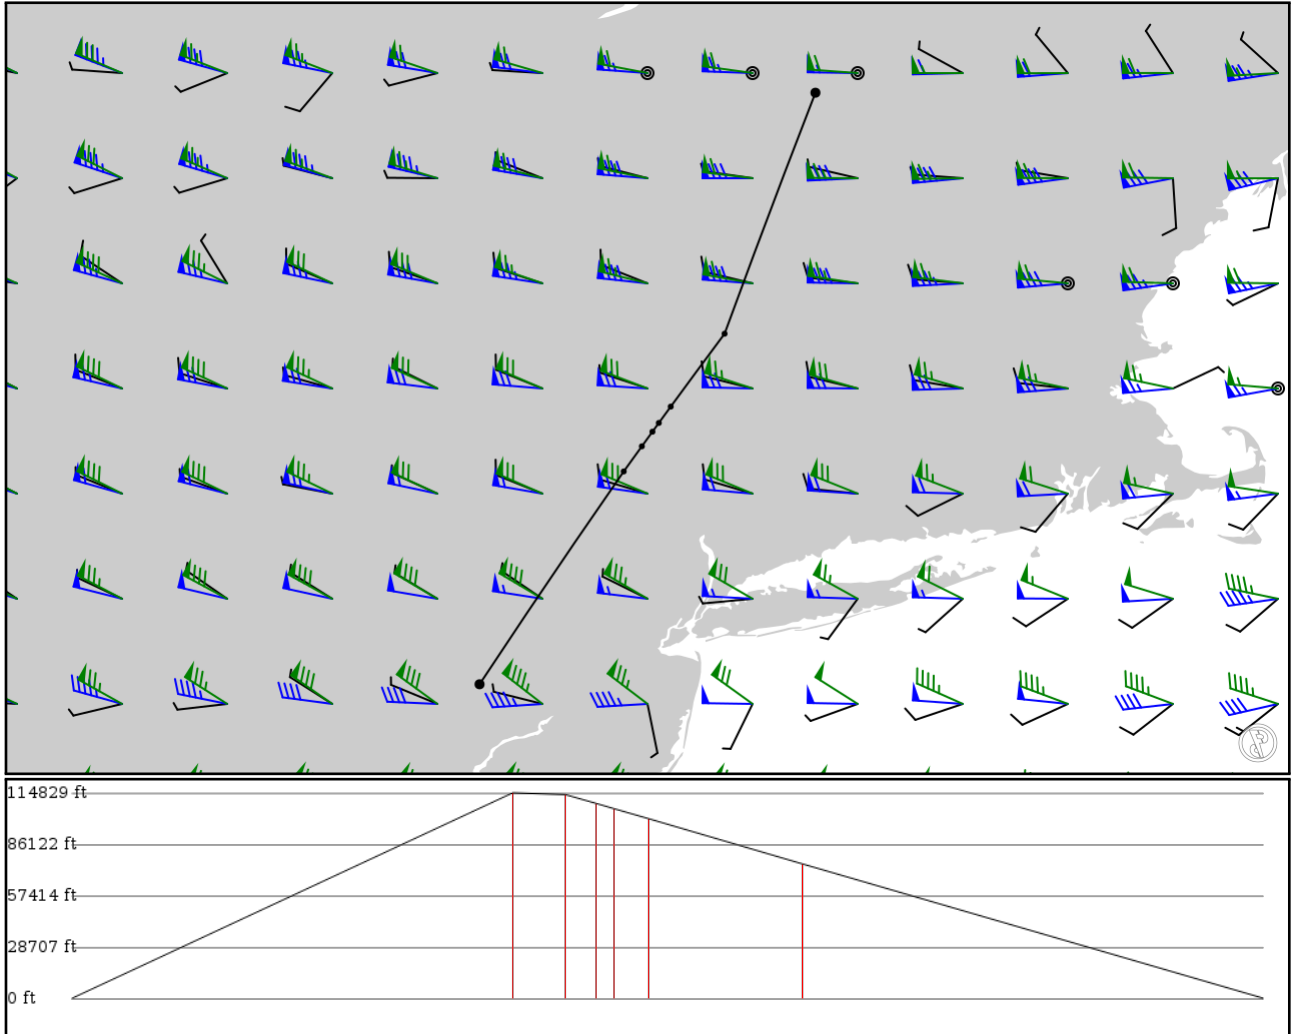

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KPTW	-	40.23950	0 ft	-	Heritage Field
APT	-	-75.55680	0 m	-	
WEARD	-	41.76210	35,000 ft	102	-
FIX	-	-74.52500	10,668 m	-	-
FILPS	V489	41.94190	34,700 ft	12	-
FIX	AWY-LO	-74.39520	10,577 m	-	-
SAGES	V489	42.04620	33,200 ft	7	-
FIX	AWY-LO	-74.31950	10,119 m	-	-
CYPER	V489	42.10900	32,300 ft	4	-
FIX	AWY-LO	-74.27380	9,845 m	-	-
AGNEZ	V489	42.22580	30,600 ft	7	-
FIX	AWY-LO	-74.18850	9,327 m	-	-
ALB	V489	42.74730	22,900 ft	35	ALBANY
VOR	AWY-LO	-73.80320	6,980 m	-	-
KBTW	-	44.47130	0 ft	107	BURLINGTON INTL
APT	-	-73.15300	0 m	-	

KPTW

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 1

Elevation: 309 ft / 94 m
Location: 40.239500 -75.556800
Magnetic Var: 11.897 W

METAR

KPTW 031454Z AUTO 09009G16KT 10SM BKN024 17/10 A3017 RMK A02 SLP213 T01670100 53008

TAF

UNKNOWN

Frequencies

REC - 119.42 MHz - ASOS
CLD - 118.55 MHz - CLNC DEL
COM - 122.70 MHz - CTAF/UNICOM
APP - 126.85 MHz - PHILADELPHIA APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	75 ft	3,374 ft	84.10	ASPHALT	0 ft	0 ft
	23 m	1,028 m	96.00		0 m	0 m
28	75 ft	3,374 ft	264.11	ASPHALT	190 ft	0 ft
	23 m	1,028 m	276.00		58 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	LOC-LOC	IPTW	108.30 MHz	18 nm	264.07	-	309 ft
				33 km	275.97		309 m

KBTV

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 335 ft / 102 m
Location: 44.471300 -73.153000
Magnetic Var: 13.913 W

METAR

KBTV 031454Z VRB04KT 10SM SCT022 BKN190 15/08 A3018 RMK A02 SLP222 T01500083 58001

TAF

TAF KBTV 031138Z 0312/0412 00000KT P6SM BKN013 FM031400 VRB03KT P6SM BKN022 FM031500 16007KT P6SM SCT035 FM031900

Frequencies

REC - 123.80 MHz - ATIS
COM - 122.95 MHz - UNICOM
TWR - 118.30 MHz -
APP - 126.30 MHz - APP/DEP

COM - 118.30 MHz - CTAF
GND - 121.90 MHz -
APP - 121.10 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	151 ft	8,329 ft	130.94	ASPHALT	0 ft	495 ft
	46 m	2,539 m	144.85		0 m	151 m
33	151 ft	8,329 ft	310.95	ASPHALT	518 ft	499 ft
	46 m	2,539 m	324.87		158 m	152 m
01	75 ft	4,115 ft	351.48	ASPHALT	226 ft	0 ft
	23 m	1,254 m	5.39		69 m	0 m
19	75 ft	4,115 ft	171.47	ASPHALT	495 ft	0 ft
	23 m	1,254 m	185.39		151 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	DME	IBTV	110.30 MHz	18 nm	-	-	339 ft
				33 km	-		339 m
33	DME	IVOE	110.30 MHz	18 nm	-	-	342 ft
				33 km	-		342 m
15	LOC-ILS	IBTV	110.30 MHz	18 nm	130.95	-	335 ft
				33 km	144.86		335 m
33	LOC-ILS	IVOE	110.30 MHz	18 nm	310.95	-	335 ft
				33 km	324.86		335 m
15	GS	IBTV	110.30 MHz	10 nm	130.95	3.00	335 ft
				19 km	144.86		335 m
33	GS	IVOE	110.30 MHz	10 nm	310.95	3.20	335 ft
				19 km	324.86		335 m