


2024/05/15 2146Z

VHHH CH A461 NOMAN M501 MIKIN ALDIS KAPOH MINIO DADNU BEDIP SKATE OMDOB M501 MOGLE PGUM

1888.34 nm / 3497.21 km

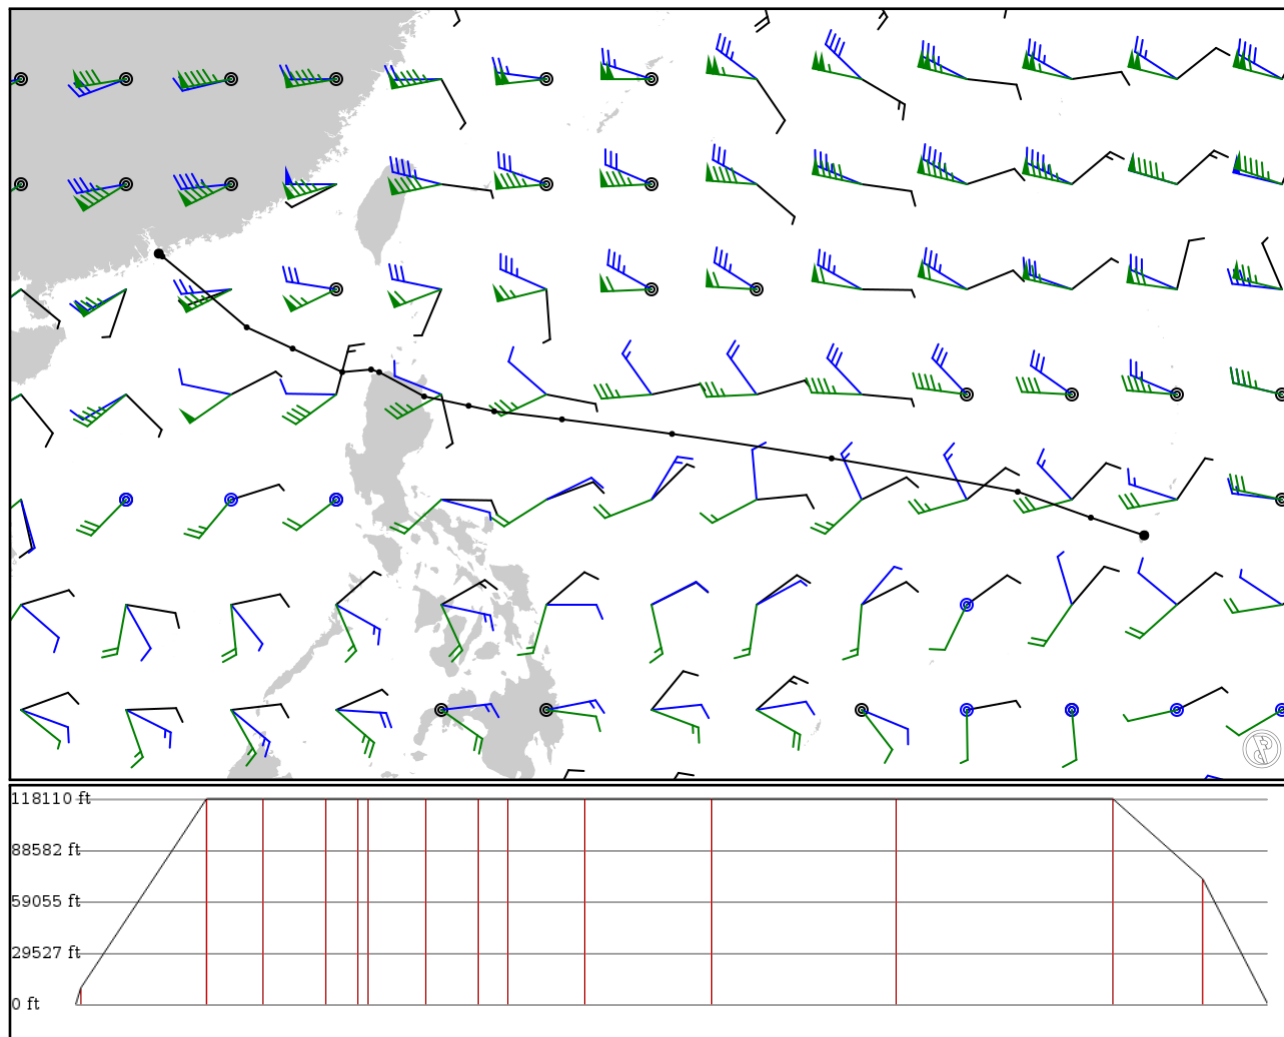

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 36000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VHHH	-	22.30890	0 ft	-	Hong Kong Intl
APT	-	113.91500	0 m		
CH	-	22.21950	2,900 ft	8	CHEUNG CHAU
VOR	-	114.03000	884 m		
NOMAN	A461	20.00000	36,000 ft	199	-
FIX	AWY-HI	116.67200	10,973 m		
MIKIN	M501	19.33520	36,000 ft	90	-
FIX	AWY-HI	118.11000	10,973 m		
ALDIS	-	18.59790	36,000 ft	98	-
FIX	-	119.66400	10,973 m		
KAPOH	-	18.67930	36,000 ft	51	-
FIX	-	120.56900	10,973 m		
MINIO	-	18.59550	36,000 ft	15	-
FIX	-	120.82200	10,973 m		
DADNU	-	17.83620	36,000 ft	92	-
FIX	-	122.23100	10,973 m		
BEDIP	-	17.54300	36,000 ft	81	-
FIX	-	123.62500	10,973 m		
SKATE	-	17.36980	36,000 ft	47	-
FIX	-	124.42700	10,973 m		
OMDOB	-	17.11810	36,000 ft	122	-
FIX	-	126.55100	10,973 m		
LIMLE	M501	16.66170	36,000 ft	200	-
FIX	AWY-HI	130.00000	10,973 m		
LEETA	M501	15.89670	36,000 ft	291	-
FIX	AWY-HI	135.00000	10,973 m		
LADSS	M501	14.85000	36,000 ft	343	-
FIX	AWY-HI	140.83300	10,973 m		
MOGLE	M501	14.04000	22,000 ft	141	-
FIX	AWY-HI	143.12500	6,706 m		
PGUM	-	13.48400	0 ft	103	Guam Intl
APT	-	144.79700	0 m		

## VHHH

Region: HONG KONG  
Timezone: UNKNOWN  
Runways: 2

Elevation: 27 ft / 8 m  
Location: 22.308900 113.915000  
Magnetic Var: 3.238 W

## METAR

VHHH 152130Z 10010KT CAVOK 26/12 Q1014 NOSIG

## TAF

TAF VHHH 152000Z 1521/1703 09010KT CAVOK TX30/1606Z TN25/1522Z TN24/1622Z TEMPO 1604/1611 08015G25KT

## Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m

## PGUM

Region: USA (GUAM, NORTHERN MARIANA ISLANDS)  
Timezone: PACIFIC/GUAM  
Runways: 2

Elevation: 305 ft / 93 m  
Location: 13.484000 144.797000  
Magnetic Var: 0.309 E

## METAR

PGUM 152054Z 08007KT 10SM FEW075 27/24 A2992 RMK A02 RAE09B25E34 SLP123 P0001 60001 T02670239 53015

## TAF

TAF PGUM 151720Z 1518/1624 08011KT P6SM VCSH FEW020 SCT030 FM152200 08013G23KT P6SM SCT020 SCT030

## Frequencies

REC - 119.00 MHz - ATIS  
TWR - 118.10 MHz - AGANA TWR

GND - 121.90 MHz -  
APP - 118.70 MHz - APP/DEP

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	150 ft	12,020 ft	64.81	ASPHALT	1,014 ft	397 ft
	46 m	3,664 m	64.50		309 m	121 m
24R	150 ft	12,020 ft	244.82	ASPHALT	0 ft	397 ft
	46 m	3,664 m	244.51		0 m	121 m
06R	151 ft	10,019 ft	64.83	ASPHALT	0 ft	400 ft
	46 m	3,054 m	64.52		0 m	122 m
24L	151 ft	10,019 ft	244.84	ASPHALT	1,010 ft	394 ft
	46 m	3,054 m	244.53		308 m	120 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IGUM	110.30 MHz	18 nm	-	-	317 ft
				33 km	-		317 m
06R	DME	IAWD	110.90 MHz	18 nm	-	-	298 ft
				33 km	-		298 m
06L	LOC-ILS	IGUM	110.30 MHz	18 nm	64.81	-	305 ft
				33 km	64.50		305 m
06R	LOC-ILS	IAWD	110.90 MHz	18 nm	64.82	-	305 ft
				33 km	64.51		305 m
06L	GS	IGUM	110.30 MHz	10 nm	64.81	3.00	305 ft
				19 km	64.50		305 m
06R	GS	IAWD	110.90 MHz	10 nm	64.82	3.00	305 ft
				19 km	64.51		305 m