


2024/06/08 2127Z

KLAX EHF **J5** FMG **V165** PYRAM **J5** LKV **V165** DSD KPDX

733.65 nm / 1358.72 km

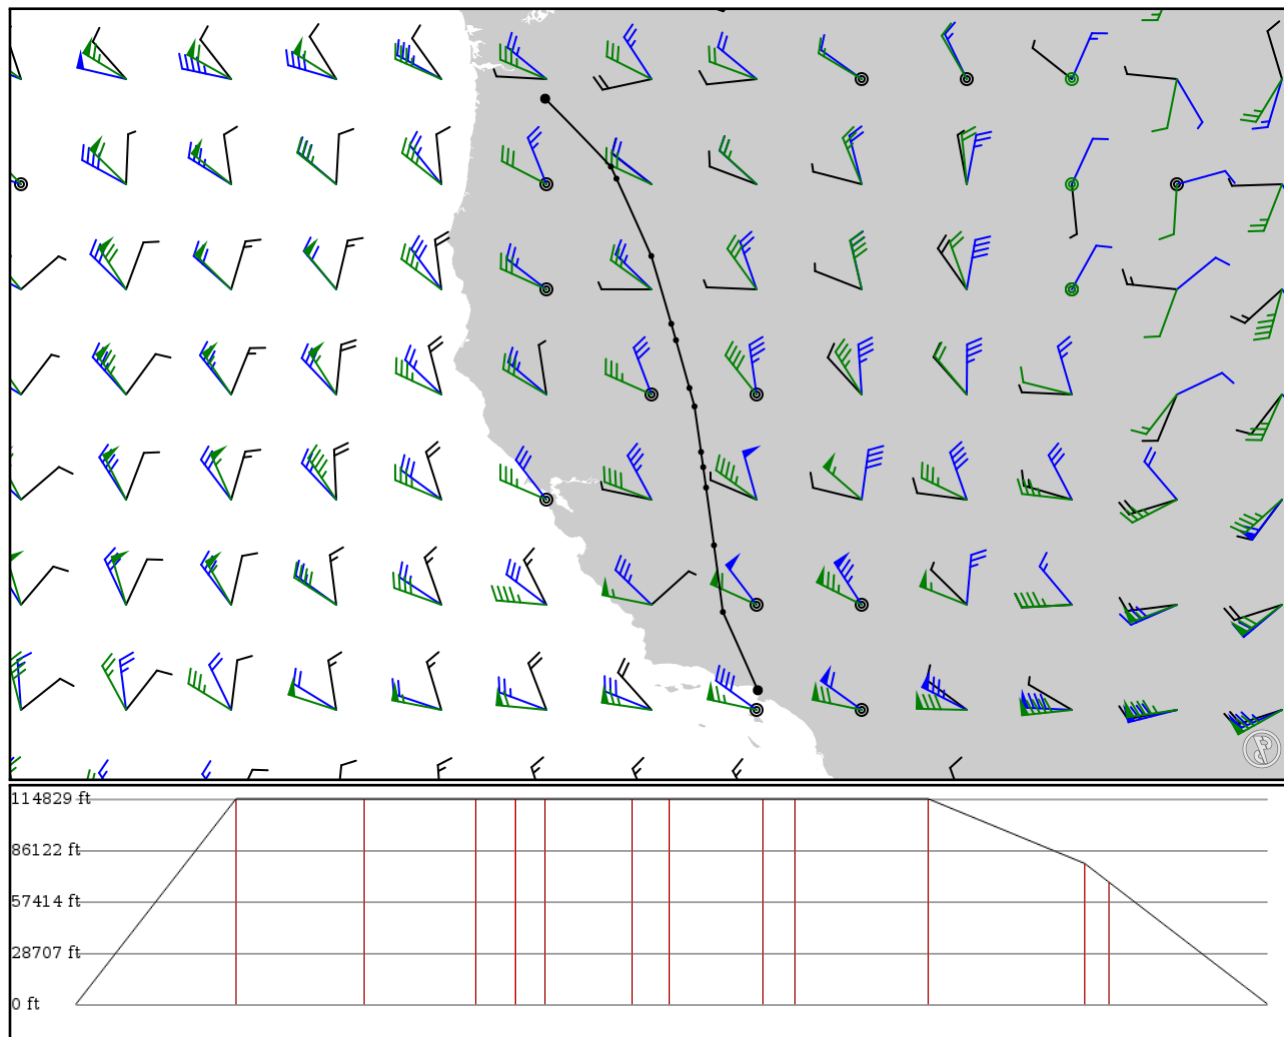

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAX APT	- -	33.94313 -118.40892	0 ft 0 m	-	Los Angeles Intl
EHF VOR	- -	35.48456 -119.09731	35,000 ft 10,668 m	98	SHAFTER VORTAC
PINNI FIX	J5 AWY-HI	36.79783 -119.27202	35,000 ft 10,668 m	79	-
TIOGA FIX	J5 AWY-HI	37.93295 -119.42802	35,000 ft 10,668 m	68	-
SONNY FIX	J5 AWY-HI	38.33575 -119.48453	35,000 ft 10,668 m	24	-
TILTS FIX	J5 AWY-HI	38.63472 -119.52688	35,000 ft 10,668 m	18	-
FMG VOR	J5 AWY-HI	39.53128 -119.65608	35,000 ft 10,668 m	54	MUSTANG VORTAC
PYRAM FIX	V165 AWY-LO	39.89328 -119.75600	35,000 ft 10,668 m	22	-
HARTT FIX	J5 AWY-HI	40.83587 -120.02125	35,000 ft 10,668 m	57	-
BAARB FIX	J5 AWY-HI	41.15761 -120.11367	35,000 ft 10,668 m	19	-
LKV VOR	J5 AWY-HI	42.49286 -120.50711	35,000 ft 10,668 m	82	LAKEVIEW VORTAC
URBIA FIX	V165 AWY-LO	44.01570 -121.19336	24,000 ft 7,315 m	96	-
DSD VOR	V165 AWY-LO	44.25275 -121.30353	20,800 ft 6,340 m	15	DESCHUTES VORTAC
KPDX APT	- -	45.58884 -122.59726	0 ft 0 m	97	PORTLAND INTL

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.434 E

METAR

KLAX 082053Z 24009KT 10SM SCT013 BKN020 BKN031 20/14 A2995 RMK A02 SLP142 T02000144 58000 \$

TAF

KLAX 082106Z 0821/0924 26010KT P6SM SCT015 OVC020 FM082300 26012KT P6SM BKN035 FM090200 27006KT P6SM OVC015 FM090

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.52		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.54	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.54	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.55	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.54	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.54	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.54	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.54	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.55	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.54	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.54	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.55	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.54	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.54	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.54	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.54	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.55	3.00	125 ft 125 m

KPDX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 31 ft / 9 m
Location: 45.588700 -122.598000
Magnetic Var: 14.443 E

METAR

KPDX 082053Z VRB03KT 10SM BKN200 BKN220 27/09 A2991 RMK A02 SLP129 T02670094 50002

TAF

TAF AMD KPDX 082050Z 0821/0918 31005KT P6SM BKN200 FM090700 VRB04KT P6SM BKN210

Frequencies

REC - 128.35 MHz - D-ATIS	COM - 122.95 MHz - PORTLAND UNICOM
GND - 121.90 MHz - PORTLAND GROUND	GND - 132.27 MHz - PORTLAND GROUND
TWR - 118.70 MHz - PORTLAND TOWER	TWR - 123.77 MHz - PORTLAND TOWER
CLD - 120.12 MHz - PORTLAND CLEARANCE DELIVERY	DEP - 118.10 MHz - PORTLAND DEPARTURE
DEP - 124.35 MHz - PORTLAND DEPARTURE	DEP - 127.85 MHz - PORTLAND DEPARTURE
APP - 118.10 MHz - PORTLAND APPROACH	APP - 124.35 MHz - PORTLAND APPROACH
APP - 126.90 MHz - PORTLAND APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	150 ft	9,810 ft	119.09	ASPHALT	1,296 ft	397 ft
	46 m	2,990 m	104.65		395 m	121 m
28R	150 ft	9,810 ft	299.12	ASPHALT	538 ft	400 ft
	46 m	2,990 m	284.68		164 m	122 m
10R	150 ft	10,981 ft	119.08	CONCRETE	0 ft	397 ft
	46 m	3,347 m	104.63		0 m	121 m
28L	150 ft	10,981 ft	299.10	CONCRETE	0 ft	400 ft
	46 m	3,347 m	284.66		0 m	122 m
03	150 ft	5,994 ft	44.92	ASPHALT	0 ft	0 ft
	46 m	1,827 m	30.48		0 m	0 m
21	150 ft	5,994 ft	224.94	ASPHALT	0 ft	0 ft
	46 m	1,827 m	210.49		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	IVDG	111.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
10R	DME	IPDX	110.50 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
21	DME	IGPO	108.90 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
28L	DME	IJMJ	110.50 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
28R	DME	IIAP	111.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
10L	LOC-ILS	IVDG	111.30 MHz	18 nm	119.12	-	30 ft
				33 km	104.68		30 m
10R	LOC-ILS	IPDX	110.50 MHz	18 nm	119.09	-	30 ft
				33 km	104.65		30 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	IJMJ	110.50 MHz	18 nm	299.09	-	30 ft
				33 km	284.65		30 m
28R	LOC-ILS	IIAP	111.30 MHz	18 nm	299.11	-	30 ft
				33 km	284.67		30 m
21	LOC-LOC	IGPO	108.90 MHz	18 nm	224.93	-	30 ft
				33 km	210.49		30 m
10L	GS	IVDG	111.30 MHz	10 nm	119.11	3.00	30 ft
				19 km	104.67		30 m
10R	GS	IPDX	110.50 MHz	10 nm	119.09	3.00	30 ft
				19 km	104.65		30 m
28L	GS	IJMJ	110.50 MHz	10 nm	299.09	3.00	30 ft
				19 km	284.65		30 m
28R	GS	IIAP	111.30 MHz	10 nm	299.11	3.00	30 ft
				19 km	284.67		30 m