

# EFHK

Helsinki Vantaa Intl


# ULLI

Saint Petersburg Pulkovo Intl / Fedor M. Dostoevsky

2024/05/17 0126Z

EFHK INLOG ULLI

162.18 nm / 300.35 km

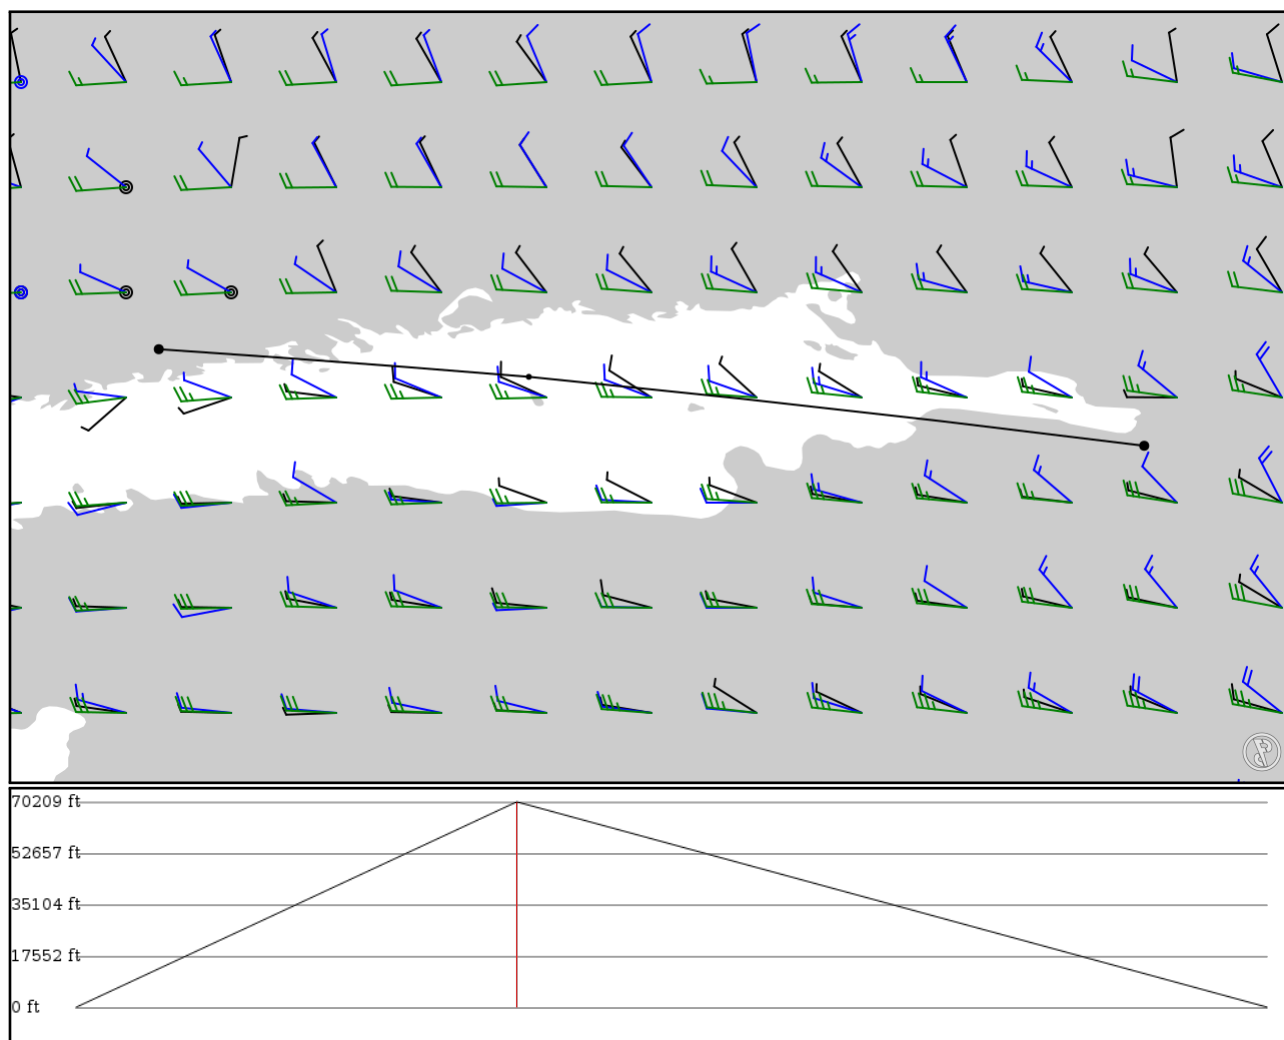

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident		Via		Lat	Alt	Dist	Name
Type				Lon		(nm)	
EFHK	-	60.32040	0 ft	-	Helsinki Vantaa Intl		
APT	-	24.95220	0 m				
INLOG	-	60.17170	21,400 ft	60	-		
FIX	-	26.94640	6,523 m				
ULLI	-	59.80030	0 ft	102	Saint Petersburg Pulkovo Intl / Fedor M. Dostoevsky		
APT	-	30.26250	0 m				

## EFHK

Region: FINLAND  
Timezone: EUROPE/HELSINKI  
Runways: 3

Elevation: 180 ft / 55 m  
Location: 60.320400 24.952200  
Magnetic Var: 9.964 E

## METAR

EFHK 170120Z 29006KT CAVOK 11/07 Q1022 NOSIG

## TAF

TAF TAF EFHK 162328Z 1700/1724 28007KT CAVOK BECMG 1711/1713 16010KT

## Frequencies

REC - 135.07 MHz - ATIS ARRIVAL	REC - 114.20 MHz - ATIS DEPARTURE
TWR - 119.70 MHz - HELSINKI TOWER	TWR - 118.85 MHz - HELSINKI TOWER
TWR - 118.60 MHz - HELSINKI TOWER	GND - 121.80 MHz - HELSINKI GROUND
GND - 118.12 MHz - HELSINKI GROUND	GND - 121.65 MHz - HELSINKI RAMP/TAXI
APP - 119.10 MHz - HELSINKI RADAR APPROACH	APP - 129.85 MHz - HELSINKI RADAR APPROACH
APP - 119.70 MHz - HELSINKI RADAR APPROACH	APP - 124.32 MHz - HELSINKI ARRIVAL
APP - 119.90 MHz - HELSINKI ARRIVAL	GND - 127.02 MHz - HELSINKI DE-ICING

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.52		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.56		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.46		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.49		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.10		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.12		0 m	60 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.49		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.55		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.12		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.55		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.49		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.49		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.55		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.12		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.55		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.49		180 m

## ULLI

Region: RUSSIA  
Timezone: EUROPE/MOSCOW  
Runways: 2

Elevation: 79 ft / 24 m  
Location: 59.800300 30.262500  
Magnetic Var: 11.656 E

## METAR

ULLI 170100Z 28002MPS CAVOK 10/07 Q1020 R28L/090060 NOSIG

## TAF

TAF ULLI 162256Z 1700/1724 31003MPS 9000 BKN020 BECMG 1706/1708 03004G09MPS BECMG 1715/1717 08003MPS

## Frequencies

REC - 127.30 MHz - PULKOVO ATIS	REC - 127.40 MHz - PULKOVO ATIS
TWR - 118.70 MHz - PULKOVO TOWER	TWR - 118.10 MHz - PULKOVO TOWER
TWR - 133.50 MHz - PULKOVO TOWER	GND - 121.70 MHz - PULKOVO GROUND
GND - 119.00 MHz - PULKOVO RAMP	GND - 120.90 MHz - PULKOVO APRON
CLD - 121.90 MHz - PULKOVO DELIVERY	APP - 125.20 MHz - PETERSBURG APPROACH
APP - 119.30 MHz - PETERSBURG APPROACH	APP - 120.30 MHz - PETERSBURG KRUG RADAR
DEP - 120.30 MHz - PETERSBURG KRUG RADAR	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10R	197 ft	12,379 ft	106.40	CONCRETE	0 ft	0 ft
	60 m	3,773 m	94.75		0 m	0 m
28L	197 ft	12,379 ft	286.46	CONCRETE	0 ft	0 ft
	60 m	3,773 m	274.80		0 m	0 m
10L	197 ft	11,132 ft	106.51	CONCRETE	0 ft	0 ft
	60 m	3,393 m	94.85		0 m	0 m
28R	197 ft	11,132 ft	286.56	CONCRETE	0 ft	0 ft
	60 m	3,393 m	274.90		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	LOC-ILS	IPU	110.50 MHz	18 nm	106.54	-	79 ft
				33 km	94.88		79 m
10R	LOC-ILS	IPK	111.90 MHz	18 nm	106.43	-	79 ft
				33 km	94.77		79 m
28L	LOC-ILS	IPO	108.90 MHz	18 nm	286.43	-	79 ft
				33 km	274.77		79 m
28R	LOC-ILS	IPL	111.30 MHz	18 nm	286.54	-	79 ft
				33 km	274.88		79 m
10L	GS	IPU	110.50 MHz	10 nm	106.54	3.00	79 ft
				19 km	94.88		79 m
10R	GS	IPK	111.90 MHz	10 nm	106.43	3.00	79 ft
				19 km	94.77		79 m
28L	GS	IPO	108.90 MHz	10 nm	286.43	3.00	79 ft
				19 km	274.77		79 m
28R	GS	IPL	111.30 MHz	10 nm	286.54	3.00	79 ft
				19 km	274.88		79 m