

EFHK

Helsinki Vantaa Intl


LFPO

Paris Orly

2024/06/16 0940Z

EFHK RUMEP **P606** KAL **L990** NEXEN **T503** MIC **UZ707** BSN LFPO

1047.05 nm / 1939.14 km

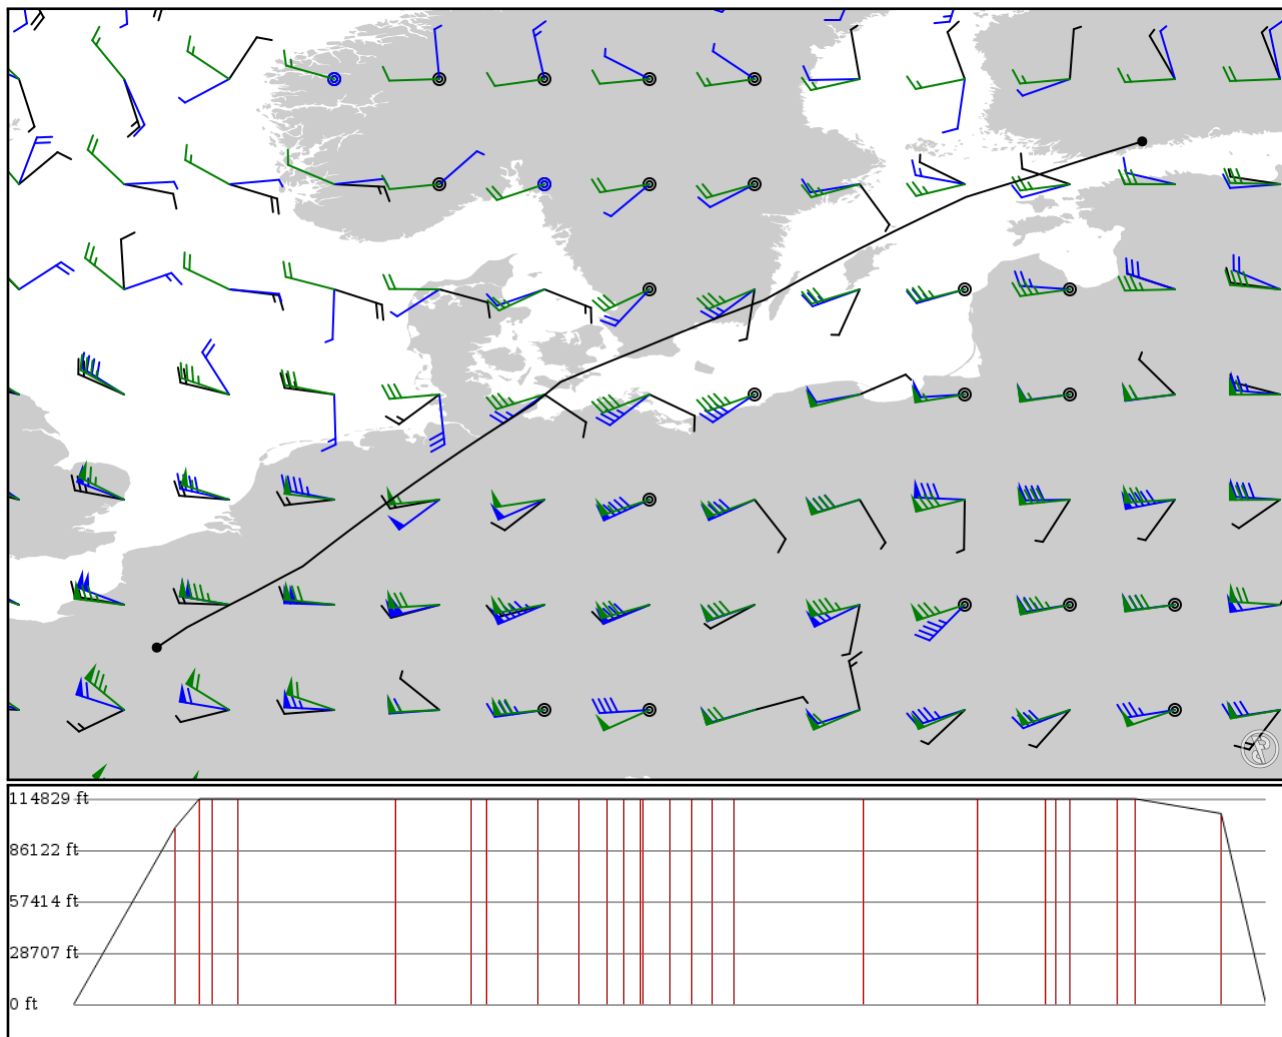

Notes

Basic altitude profile:

- Ascent Rate: 2400ft/min
- Ascent Speed: 280kts
- Cruise Altitude: 35000ft
- Cruise Speed: 430kts
- Descent Rate: 6000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EFHK APT	-	60.32040 24.95220	0 ft 0 m	-	Helsinki Vantaa Intl
RUMEP FIX	-	59.51250 22.43220	30,100 ft 9,174 m	90	-
EVADI FIX	P606 AWY-HI	59.33970 21.85720	35,000 ft 10,668 m	20	-
OKEVU FIX	P606 AWY-HI	59.23860 21.52670	35,000 ft 10,668 m	11	-
ALAMI FIX	P606 AWY-HI	59.04780 20.91580	35,000 ft 10,668 m	22	-
OLANU FIX	P606 AWY-HI	57.46900 17.71860	35,000 ft 10,668 m	138	-
KAL VOR	P606 AWY-HI	56.68530 16.28410	35,000 ft 10,668 m	66	KALMAR
LAGIS FIX	L990 AWY-HI	56.55490 15.93700	35,000 ft 10,668 m	13	-
KOTAM FIX	L990 AWY-HI	56.13280 14.83670	35,000 ft 10,668 m	44	-
PERRY FIX	L990 AWY-HI	55.77680 13.96280	35,000 ft 10,668 m	36	-
SUP VOR	L990 AWY-HI	55.53450 13.37950	35,000 ft 10,668 m	24	STURUP (MALMO)
ADVIS FIX	L990 AWY-HI	55.38470 13.00640	35,000 ft 10,668 m	15	-
LILBI FIX	L990 AWY-HI	55.25310 12.68280	35,000 ft 10,668 m	13	-
EVBED FIX	L990 AWY-HI	55.23080 12.62780	35,000 ft 10,668 m	2	-
LUPUR FIX	L990 AWY-HI	54.99110 12.05080	35,000 ft 10,668 m	24	-
NEXEN FIX	L990 AWY-HI	54.81080 11.62530	35,000 ft 10,668 m	18	-
GIMRU FIX	T503 AWY-HI	54.56000 11.31360	35,000 ft 10,668 m	18	-
MIC VOR	T503 AWY-HI	54.30550 11.00520	35,000 ft 10,668 m	18	MICHAELSDORF
GULMI FIX	UZ707 AWY-HI	52.89750 8.85333	35,000 ft 10,668 m	114	-
KOMOT FIX	UZ707 AWY-HI	51.62860 7.07417	35,000 ft 10,668 m	100	-
AKUXO FIX	UZ707 AWY-HI	50.87140 6.07444	35,000 ft 10,668 m	58	-
ULPEN FIX	UZ707 AWY-HI	50.75560 5.92750	35,000 ft 10,668 m	8	-
LNO VOR	UZ707 AWY-HI	50.58580 5.71028	35,000 ft 10,668 m	13	OLNO
RASCA FIX	UZ707 AWY-HI	50.14570 4.88122	35,000 ft 10,668 m	41	-
FAMEN FIX	UZ707 AWY-HI	49.97500 4.56667	35,000 ft 10,668 m	15	-
BSN DME	UZ707 AWY-HI	49.18830 3.05647	32,500 ft 9,906 m	75	BOURSONNE VOR-DME
LFPO APT	-	48.72630 2.36698	0 ft 0 m	38	Paris Only

EFHK

Region: FINLAND

Timezone: EUROPE/HELSINKI

Runways: 3

Elevation: 180 ft / 55 m

Location: 60.320400 24.952200

Magnetic Var: 9.977 E

METAR

EFHK 160920Z 14014KT 9999 FEW035 20/12 Q1016 NOSIG

TAF

TAF TAF EFHK 160835Z 1609/1709 15011KT 9999 FEW030 BECMG 1623/1701 09007KT PROB30 TEMPO 1708/1709 FEW050CB

Frequencies

REC - 135.07 MHz - ATIS ARRIVAL

TWR - 119.70 MHz - HELSINKI TOWER

TWR - 118.60 MHz - HELSINKI TOWER

GND - 118.12 MHz - HELSINKI GROUND

APP - 119.10 MHz - HELSINKI RADAR APPROACH

APP - 119.70 MHz - HELSINKI RADAR APPROACH

APP - 119.90 MHz - HELSINKI ARRIVAL

REC - 114.20 MHz - ATIS DEPARTURE

TWR - 118.85 MHz - HELSINKI TOWER

GND - 121.80 MHz - HELSINKI GROUND

GND - 121.65 MHz - HELSINKI RAMP/TAXI

APP - 129.85 MHz - HELSINKI RADAR APPROACH

APP - 124.32 MHz - HELSINKI ARRIVAL

GND - 127.02 MHz - HELSINKI DE-ICING

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.51		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.55		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.45		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.48		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.09		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.11		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.47		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.53		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.10		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.53		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.47		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.47		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.53		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.10		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.53		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.47		180 m

LFPO

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 3

Elevation: 291 ft / 89 m
Location: 48.726300 2.366980
Magnetic Var: 1.463 E

METAR

LFPO 160930Z 21013KT 180V240 9999 SCT012 BKN033 16/15 Q1007 BECMG SCT020

TAF

TAF AMD LFPO 160917Z 1609/1712 20011KT 9999 SCT012 BKN035 PROB40 TEMPO 1613/1620 21015G25KT SCT035TCU PROB30 TEMP

Frequencies

REC - 126.50 MHz - ORLY ATIS	REC - 131.35 MHz - ORLY ATIS
CLD - 121.05 MHz - PREFLIGHT	GND - 121.70 MHz - ORLY GROUND
GND - 121.82 MHz - ORLY GROUND	TWR - 118.70 MHz - ORLY TOWER
TWR - 120.50 MHz - ORLY TOWER	APP - 118.85 MHz - PARIS APPROACH
APP - 123.87 MHz - PARIS APPROACH	APP - 124.45 MHz - PARIS APPROACH
DEP - 124.35 MHz - PARIS DEPARTURE	DEP - 127.75 MHz - PARIS DEPARTURE
DEP - 128.37 MHz - PARIS DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	11,953 ft	61.78	ASPHALT	984 ft	482 ft
	45 m	3,643 m	60.32		300 m	147 m
24	148 ft	11,953 ft	241.82	ASPHALT	0 ft	492 ft
	45 m	3,643 m	240.35		0 m	150 m
07	148 ft	10,868 ft	74.34	CONCRETE	0 ft	0 ft
	45 m	3,313 m	72.88		0 m	0 m
25	148 ft	10,868 ft	254.38	CONCRETE	1,427 ft	0 ft
	45 m	3,313 m	252.91		435 m	0 m
02	197 ft	7,875 ft	18.30	CONCRETE	0 ft	492 ft
	60 m	2,400 m	16.84		0 m	150 m
20	197 ft	7,875 ft	198.31	CONCRETE	0 ft	492 ft
	60 m	2,400 m	196.85		0 m	150 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	ORE	108.50 MHz	18 nm	-	-	291 ft
				33 km	-		291 m
24	DME	OLO	110.90 MHz	18 nm	-	-	291 ft
				33 km	-		291 m
02	LOC-ILS	OLN	110.30 MHz	18 nm	18.31	-	291 ft
				33 km	16.85		291 m
06	LOC-ILS	ORE	108.50 MHz	18 nm	61.80	-	291 ft
				33 km	60.34		291 m
07	LOC-ILS	OLE	108.15 MHz	18 nm	74.36	-	291 ft
				33 km	72.90		291 m
24	LOC-ILS	OLO	110.90 MHz	18 nm	241.80	-	291 ft
				33 km	240.34		291 m
25	LOC-ILS	OLW	111.75 MHz	18 nm	254.36	-	291 ft
				33 km	252.90		291 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	LOC-LOC	OLE	108.15 MHz	18 nm	74.37	-	291 ft
				33 km	72.91		291 m
02	GS	OLN	110.30 MHz	10 nm	18.31	3.00	291 ft
				19 km	16.85		291 m
06	GS	ORE	108.50 MHz	10 nm	61.80	3.00	291 ft
				19 km	60.34		291 m
07	GS	OLE	108.15 MHz	10 nm	74.36	3.00	291 ft
				19 km	72.90		291 m
24	GS	OLO	110.90 MHz	10 nm	241.80	3.00	291 ft
				19 km	240.34		291 m
25	GS	OLW	111.75 MHz	10 nm	254.36	3.00	291 ft
				19 km	252.90		291 m