

OOMS

Muscat Intl


HAAB

Bole Intl-Addis Ababa

2024/06/05 1443Z

OOMS NALKI **G652** TOKRA **UG652** DUDRI **G652** KRA **B535** TORBA **UB535** ASOLE HAAB

1431.17 nm / 2650.53 km

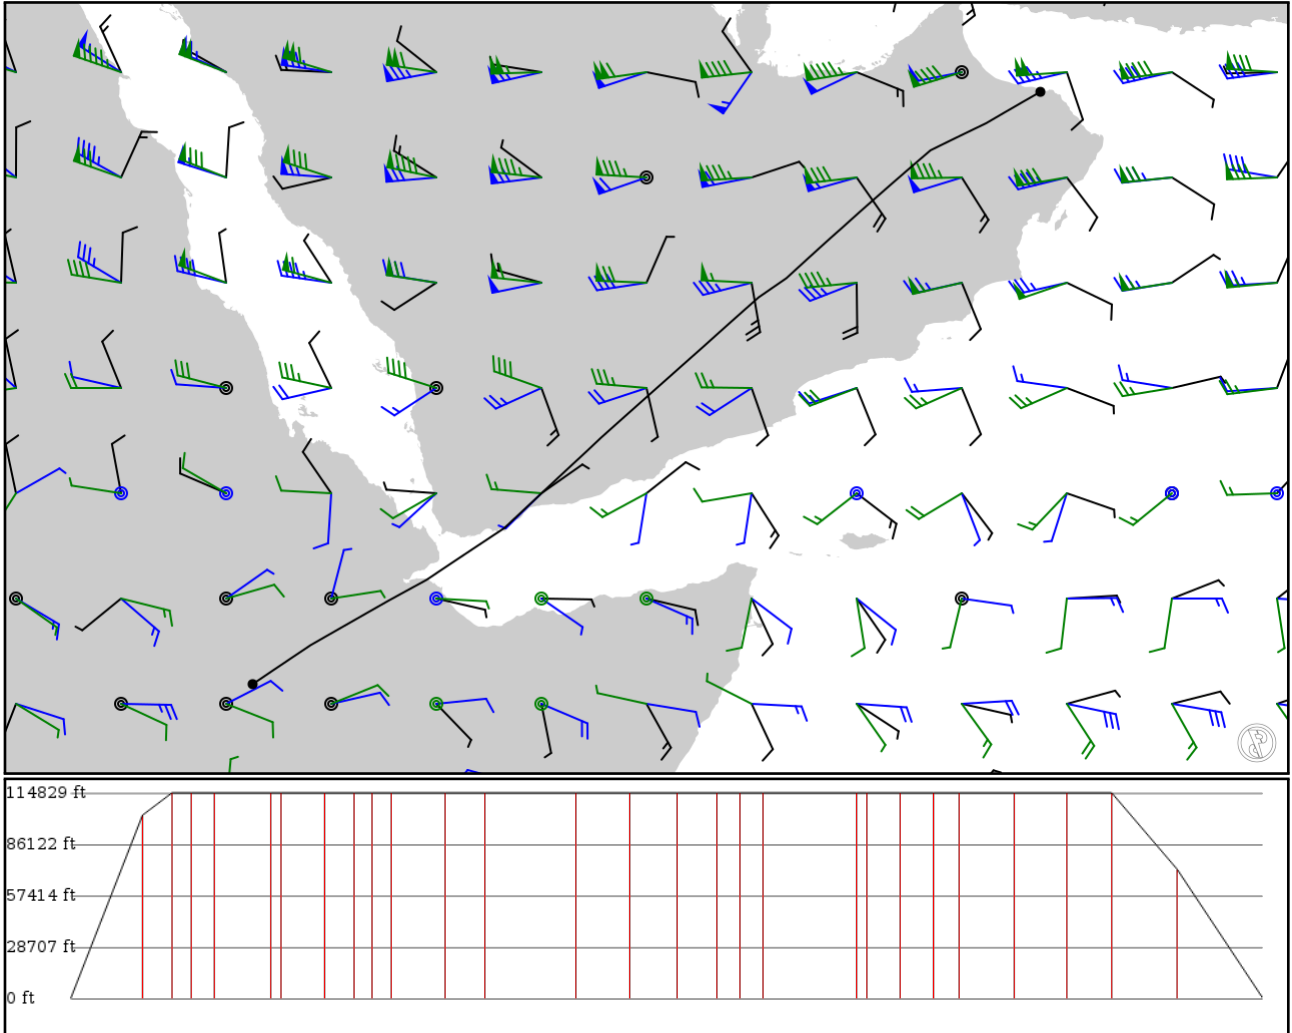

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OOMS	-	23.60030	0 ft	-	Muscat Intl
APT	-	58.28090	0 m		
NALKI	-	22.82440	31,200 ft	87	-
FIX	-	56.93720	9,510 m		
NAMVA	G652	22.55250	35,000 ft	35	-
FIX	AWY-HI	56.37310	10,668 m		
DATBU	G652	22.37860	35,000 ft	22	-
FIX	AWY-HI	56.01500	10,668 m		
TOKRA	G652	22.15690	35,000 ft	28	-
FIX	AWY-HI	55.56390	10,668 m		
ORPAV	UG652	21.39310	35,000 ft	67	-
FIX	AWY-HI	54.67670	10,668 m		
ORMUM	UG652	21.25110	35,000 ft	12	-
FIX	AWY-HI	54.51390	10,668 m		
OBSUS	UG652	20.65140	35,000 ft	52	-
FIX	AWY-HI	53.83110	10,668 m		
GEROL	UG652	20.24530	35,000 ft	35	-
FIX	AWY-HI	53.37860	10,668 m		
MIPUB	UG652	20.00110	35,000 ft	21	-
FIX	AWY-HI	53.10190	10,668 m		
DAVOX	UG652	19.73330	35,000 ft	23	-
FIX	AWY-HI	52.80470	10,668 m		
DUDRI	UG652	19.00000	35,000 ft	63	-
FIX	AWY-HI	52.00000	10,668 m		
IMPOS	G652	18.52690	35,000 ft	48	-
FIX	AWY-HI	51.31330	10,668 m		
THAMD	G652	17.28330	35,000 ft	109	-
FIX	AWY-HI	49.91670	10,668 m		
IVINA	G652	16.54810	35,000 ft	64	-
FIX	AWY-HI	49.08720	10,668 m		
NABUP	G652	15.90470	35,000 ft	56	-
FIX	AWY-HI	48.36190	10,668 m		
DEKMA	G652	15.37390	35,000 ft	47	-
FIX	AWY-HI	47.76470	10,668 m		
MEMTA	G652	15.05610	35,000 ft	28	-
FIX	AWY-HI	47.40940	10,668 m		
IVORA	G652	14.72830	35,000 ft	28	-
FIX	AWY-HI	47.06170	10,668 m		
BORIL	G652	13.43810	35,000 ft	111	-
FIX	AWY-HI	45.67470	10,668 m		
IVOSO	G652	13.29280	35,000 ft	12	-
FIX	AWY-HI	45.51860	10,668 m		
KRA	G652	12.83120	35,000 ft	40	ADEN
VOR	AWY-HI	45.02360	10,668 m		
KATAN	B535	12.45670	35,000 ft	40	-
FIX	AWY-HI	44.45780	10,668 m		
TORBA	B535	12.17670	35,000 ft	29	-
FIX	AWY-HI	44.03500	10,668 m		
DTI	UB535	11.54850	35,000 ft	66	DJIBOUTI
VOR	AWY-HI	43.09350	10,668 m		
LAKBE	UB535	11.04000	35,000 ft	62	-
FIX	AWY-HI	42.16170	10,668 m		
NIDEG	UB535	10.58830	35,000 ft	54	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	41.36830	10,668 m		
ASOLE	UB535	9.94047	22,000 ft	77	-
FIX	AWY-HI	40.23240	6,706 m		
HAAB	-	8.97793	0 ft	102	Bole Intl-Addis Ababa
APT	-	38.79930	0 m		

OOMS

Region: OMAN
Timezone: ASIA/MUSCAT
Runways: 2

Elevation: 46 ft / 14 m
Location: 23.600300 58.280900
Magnetic Var: 1.789 E

METAR

OOMS 051350Z 06006KT 9999 FEW030 37/25 Q1000 NOSIG

TAF

TAF OOMS 051100Z 0512/0618 06012KT 8000 NSC BECMG 0518/0520 21014KT BECMG 0606/0608 06014KT

Frequencies

REC - 126.80 MHz - ATIS
TWR - 118.40 MHz -
APP - 119.80 MHz - RADAR
GND - 121.80 MHz -
APP - 121.20 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	197 ft	13,106 ft	84.99	ASPHALT	0 ft	390 ft
	60 m	3,995 m	83.20		0 m	119 m
26R	197 ft	13,106 ft	265.01	ASPHALT	525 ft	394 ft
	60 m	3,995 m	263.22		160 m	120 m
08R	148 ft	11,743 ft	84.98	CONCRETE	1,371 ft	197 ft
	45 m	3,579 m	83.19		418 m	60 m
26L	148 ft	11,743 ft	264.99	CONCRETE	0 ft	200 ft
	45 m	3,579 m	263.21		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	IMW	108.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
26L	DME	ISB	110.30 MHz	18 nm	-	-	25 ft
				33 km	-		25 m
08L	LOC-ILS	IML	108.90 MHz	18 nm	84.97	-	47 ft
				33 km	83.18		47 m
26R	LOC-ILS	IMR	110.70 MHz	18 nm	264.97	-	48 ft
				33 km	263.18		48 m
08L	GS	IML	108.90 MHz	10 nm	84.97	3.00	47 ft
				19 km	83.18		47 m
26R	GS	IMR	110.70 MHz	10 nm	264.97	3.00	48 ft
				19 km	263.18		48 m

HAAB

Region: ETHIOPIA
Timezone: AFRICA/ADDIS_ABABA
Runways: 2

Elevation: 7,625 ft / 2,324 m
Location: 8.977930 38.799300
Magnetic Var: 2.573 E

METAR

HAAB 051400Z 24006KT 9999 BKN025 23/10 Q1023

TAF

TAF HAAB 050330Z 0506/0612 12006KT 9999 SCT030 FEW090 BECMG 0510/0514 08009KT BKN026

Frequencies

REC - 128.50 MHz - BOLE ATIS
TWR - 118.10 MHz - BOLE TOWER

GND - 121.90 MHz - BOLE GROUND
APP - 119.70 MHz - BOLE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	148 ft	12,456 ft	73.56	ASPHALT	1,175 ft	0 ft
	45 m	3,797 m	70.99		358 m	0 m
25L	148 ft	12,456 ft	253.56	ASPHALT	1,175 ft	0 ft
	45 m	3,797 m	250.99		358 m	0 m
07L	148 ft	12,134 ft	73.56	ASPHALT	817 ft	0 ft
	45 m	3,698 m	70.99		249 m	0 m
25R	148 ft	12,134 ft	253.57	ASPHALT	1,243 ft	0 ft
	45 m	3,698 m	251.00		379 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25L	LOC-ILS	ADS	112.90 MHz	18 nm	253.56	-	7,625 ft
				33 km	250.99		7,625 m