

KJXN

Jackson Co Reynolds Fld


KDET

Coleman A. Young Muni

2024/06/06 0553Z

KJXN DEXER KDET

65.04 nm / 120.45 km

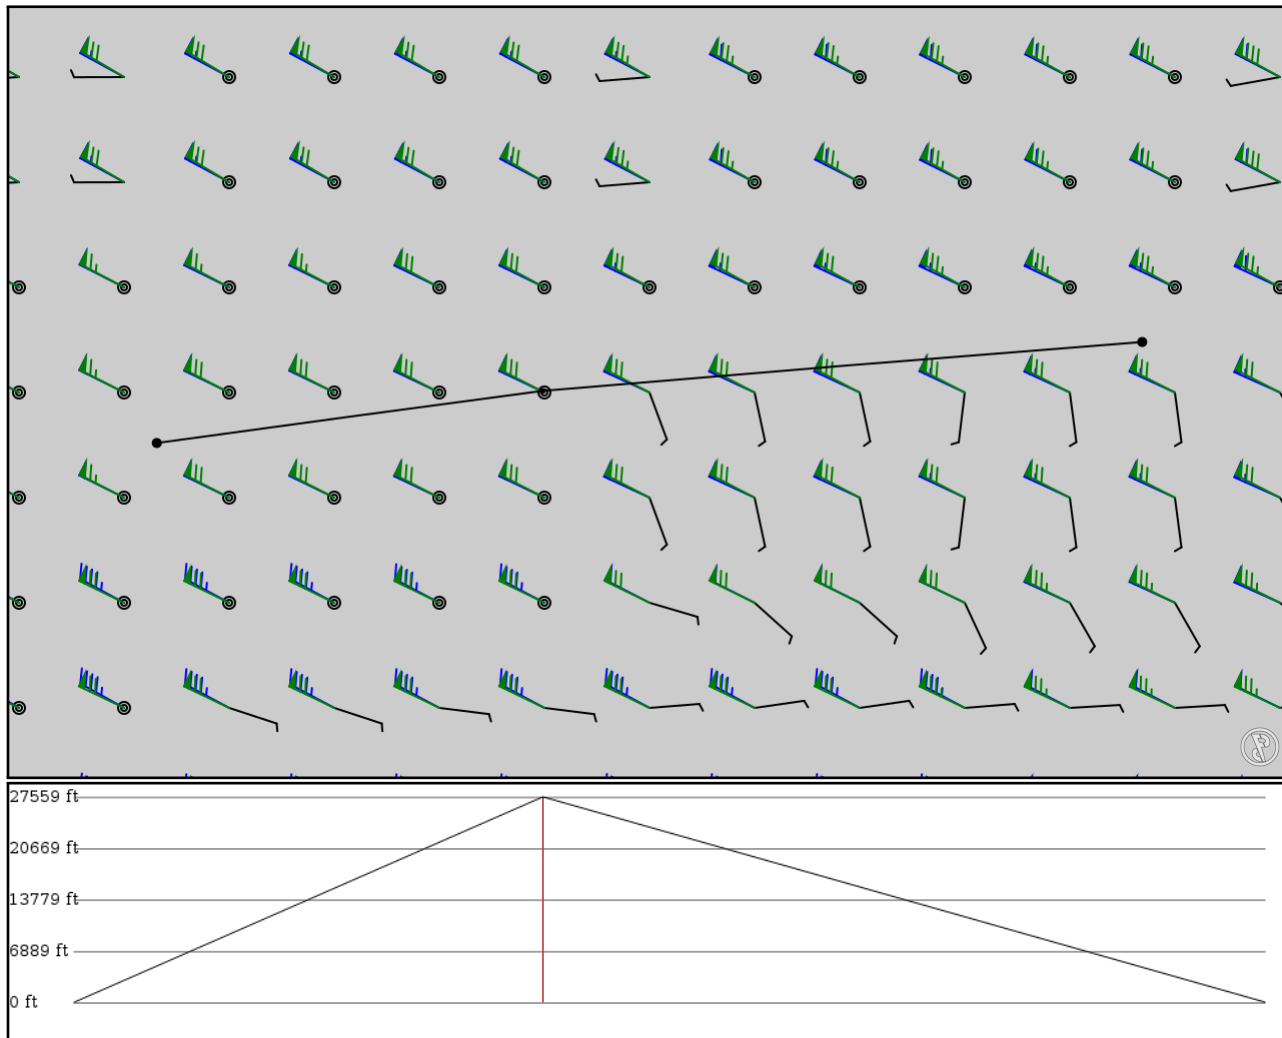

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJXN APT	-	42.26040 -84.46070	0 ft 0 m	-	Jackson Co Reynolds Fld
DEXER FIX	-	42.33700 -83.89370	8,400 ft 2,560 m	25	-
KDET APT	-	42.40900 -83.01030	0 ft 0 m	39	Coleman A. Young Muni

KJXN

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 2

Elevation: 1,000 ft / 305 m
Location: 42.260400 -84.460700
Magnetic Var: 6.711 W

METAR

KJXN 060456Z AUTO 22003KT 10SM CLR 14/13 A2962 RMK A02 SLP026 T01390133 402610133

TAF

KJXN 052340Z 0600/0624 23007KT P6SM FEW023 SCT040 BKN060 FM060700 24008KT P6SM VCSH BKN150 FM061200 24009KT P6SM I

Frequencies

REC - 127.95 MHz - ATIS
COM - 120.70 MHz - CTAF
GND - 121.90 MHz - GND/CLNC DEL
APP - 127.30 MHz - LANSING APP/DEP

REC - 125.72 MHz - ATIS
COM - 122.95 MHz - UNICOM
TWR - 120.70 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	151 ft	5,344 ft	50.83	ASPHALT	440 ft	0 ft
	46 m	1,629 m	57.54		134 m	0 m
25	151 ft	5,344 ft	230.84	ASPHALT	0 ft	167 ft
	46 m	1,629 m	237.55		0 m	51 m
14	98 ft	3,997 ft	133.37	ASPHALT	0 ft	0 ft
	30 m	1,218 m	140.08		0 m	0 m
32	98 ft	3,997 ft	313.38	ASPHALT	0 ft	0 ft
	30 m	1,218 m	320.09		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	LOC-ILS	IJXN	109.10 MHz	18 nm	230.84	-	1,000 ft
				33 km	237.55		1,000 m
25	GS	IJXN	109.10 MHz	10 nm	230.84	3.00	1,000 ft
				19 km	237.55		1,000 m

KDET

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 2

Elevation: 625 ft / 191 m
Location: 42.409000 -83.010300
Magnetic Var: 7.766 W

METAR

KDET 060516Z 30004KT 10SM FEW016 SCT024 22/18 A2959 RMK A02 T02170178

TAF

TAF KDET 052320Z 0600/0624 24006KT P6SM BKN040 BKN080 FM060200 26006KT P6SM BKN150 FM061400 27012G20KT P6SM SCT03

Frequencies

REC - 124.87 MHz - ATIS
GND - 121.85 MHz -
APP - 126.85 MHz - APP/DEP
COM - 122.95 MHz - UNICOM
TWR - 121.30 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	98 ft	5,498 ft	143.41	ASPHALT	407 ft	305 ft
	30 m	1,676 m	151.18		124 m	93 m
33	98 ft	5,498 ft	323.42	ASPHALT	0 ft	285 ft
	30 m	1,676 m	331.18		0 m	87 m
07	98 ft	3,709 ft	63.23	ASPHALT	725 ft	0 ft
	30 m	1,130 m	71.00		221 m	0 m
25	98 ft	3,709 ft	243.24	ASPHALT	0 ft	390 ft
	30 m	1,130 m	251.01		0 m	119 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	IDET	111.30 MHz	18 nm	143.42	-	625 ft
				33 km	151.19		625 m
33	LOC-ILS	IVQM	111.30 MHz	18 nm	323.42	-	625 ft
				33 km	331.19		625 m
15	GS	IDET	111.30 MHz	10 nm	143.42	3.00	625 ft
				19 km	151.19		625 m
33	GS	IVQM	111.30 MHz	10 nm	323.42	3.00	625 ft
				19 km	331.19		625 m