


2024/05/11 0911Z

WMKK GOBAS **R467** GUNIP **N571** DORAM **B466** AGELA **N571** VUSET **A454** PASOV OMDB

3006.04 nm / 5567.19 km

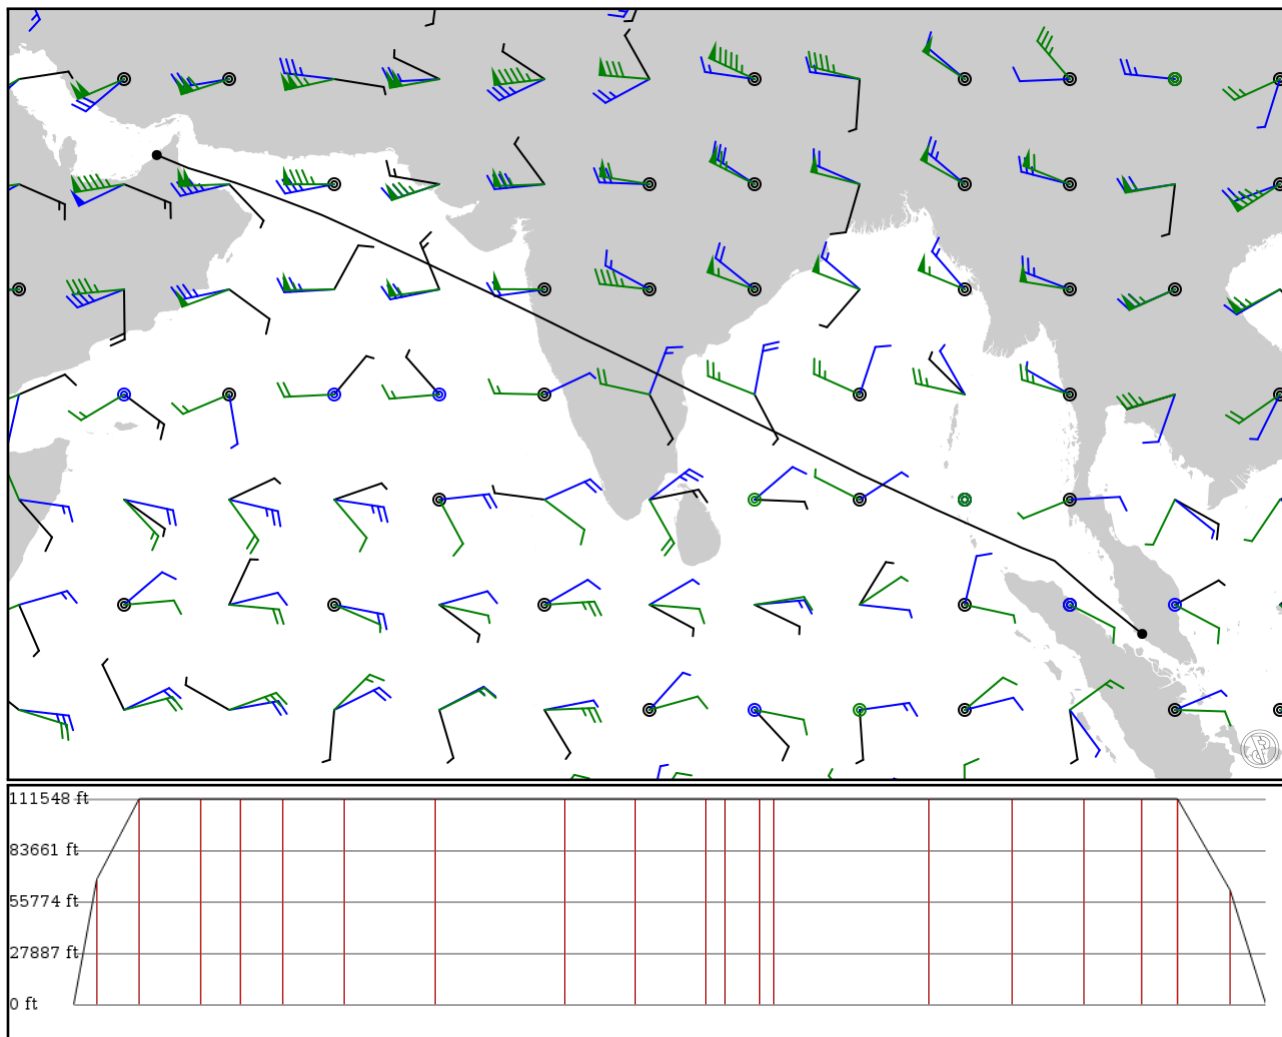

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 41000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WMKK	-	2.74558	0 ft	-	Kuala Lumpur Intl - Sepang
APT	-	101.70991	0 m	-	
GOBAS	-	3.35639	20,700 ft	58	-
FIX	-	100.95611	6,309 m	-	-
GUNIP	R467	4.49806	34,000 ft	109	-
FIX	AWY-HI	99.53056	10,363 m	-	-
VAMPI	N571	6.18222	34,000 ft	154	-
FIX	AWY-HI	97.58556	10,363 m	-	-
DOVUM	N571	6.79306	34,000 ft	99	-
FIX	AWY-HI	96.04278	10,363 m	-	-
IGOGU	N571	7.51694	34,000 ft	106	-
FIX	AWY-HI	94.41667	10,363 m	-	-
LAGOG	N571	8.59403	34,000 ft	157	-
FIX	AWY-HI	91.99708	10,363 m	-	-
BIKEN	N571	10.20583	34,000 ft	227	-
FIX	AWY-HI	88.53081	10,363 m	-	-
IDASO	N571	12.65981	34,000 ft	327	-
FIX	AWY-HI	83.55639	10,363 m	-	-
GURAS	N571	14.00133	34,000 ft	178	-
FIX	AWY-HI	80.83172	10,363 m	-	-
VIRAM	N571	15.35956	34,000 ft	178	-
FIX	AWY-HI	78.09872	10,363 m	-	-
DORAM	N571	15.71786	34,000 ft	48	-
FIX	AWY-HI	77.34883	10,363 m	-	-
BOGAT	B466	16.35944	34,000 ft	86	-
FIX	AWY-HI	75.99900	10,363 m	-	-
AGELA	B466	16.60667	34,000 ft	34	-
FIX	AWY-HI	75.46583	10,363 m	-	-
SUGID	N571	19.55083	34,000 ft	391	-
FIX	AWY-HI	69.34984	10,363 m	-	-
DOGET	N571	21.11736	34,000 ft	210	-
FIX	AWY-HI	66.00028	10,363 m	-	-
PARAR	N571	22.44167	34,000 ft	179	-
FIX	AWY-HI	63.11667	10,363 m	-	-
RAGMA	N571	23.38361	34,000 ft	147	-
FIX	AWY-HI	60.64611	10,363 m	-	-
VUSET	N571	23.92778	34,000 ft	89	-
FIX	AWY-HI	59.13667	10,363 m	-	-
PASOV	A454	24.64472	18,900 ft	132	-
FIX	AWY-HI	56.84361	5,761 m	-	-
OMDB	-	25.25491	0 ft	88	DUBAI INTL
APT	-	55.36426	0 m	-	

WMKK

Region: MALAYSIA (PENINSULAR MALAYSIA)
Timezone: ASIA/KUALA_LUMPUR
Runways: 3

Elevation: 68 ft / 21 m
Location: 2.738340 101.702000
Magnetic Var: 0.057 E

METAR

WMKK 110900Z VRB02KT 7000 -TSRA FEW008 FEW017CB SCT030 28/26 Q1007 RETSRA NOSIG

TAF

TAF WMKK 110500Z 1106/1212 VRB03KT 9999 FEW017CB TEMPO 1106/1110 10008G22KT 4000 TSRA FEW017CB SCT018

Frequencies

APP - 118.65 MHz - LUMPUR RADAR	APP - 121.25 MHz - LUMPUR RADAR
APP - 124.20 MHz - LUMPUR RADAR	APP - 125.80 MHz - LUMPUR RADAR
APP - 119.45 MHz - LUMPUR RADAR	APP - 120.35 MHz - LUMPUR RADAR
APP - 124.65 MHz - LUMPUR RADAR	APP - 125.10 MHz - LUMPUR RADAR
APP - 135.75 MHz - LUMPUR RADAR	DEP - 135.25 MHz - LUMPUR DEPARTURE
TWR - 118.80 MHz - LUMPUR TOWER	TWR - 118.50 MHz - LUMPUR TOWER
TWR - 119.80 MHz - LUMPUR TOWER	GND - 121.65 MHz - LUMPUR GROUND
GND - 121.80 MHz - LUMPUR GROUND	GND - 122.52 MHz - LUMPUR GROUND
GND - 118.05 MHz - LUMPUR GROUND	GND - 122.15 MHz - LUMPUR GROUND
GND - 122.85 MHz - LUMPUR GROUND	GND - 122.27 MHz - LUMPUR GROUND
GND - 123.25 MHz - LUMPUR GROUND	GND - 121.72 MHz - LUMPUR GROUND
GND - 122.55 MHz - LUMPUR GROUND	GND - 130.75 MHz - LUMPUR GROUND
CLD - 126.00 MHz - LUMPUR DELIVERY	REC - 126.45 MHz - LUMPUR TERMINAL INFORMATION
REC - 128.05 MHz - LUMPUR TERMINAL INFORMATION	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	197 ft	13,034 ft	146.21	ASPHALT	0 ft	390 ft
	60 m	3,973 m	146.16		0 m	119 m
33	197 ft	13,034 ft	326.21	ASPHALT	0 ft	394 ft
	60 m	3,973 m	326.16		0 m	120 m
14L	197 ft	13,248 ft	146.20	ASPHALT	0 ft	384 ft
	60 m	4,038 m	146.14		0 m	117 m
32R	197 ft	13,248 ft	326.20	ASPHALT	0 ft	0 ft
	60 m	4,038 m	326.14		0 m	0 m
14R	197 ft	13,185 ft	146.21	ASPHALT	0 ft	0 ft
	60 m	4,019 m	146.16		0 m	0 m
32L	197 ft	13,185 ft	326.21	ASPHALT	0 ft	390 ft
	60 m	4,019 m	326.16		0 m	119 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	DME	IWK	110.10 MHz	18 nm	-	-	-1 ft
				33 km	-		-1 m
33	DME	IWM	111.50 MHz	18 nm	-	-	-1 ft
				33 km	-		-1 m
14L	DME	IEL	108.50 MHz	18 nm	-	-	59 ft
				33 km	-		59 m
14R	DME	IWR	110.70 MHz	18 nm	-	-	78 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	-		78 m
32L	DME	IWL	111.90 MHz	18 nm	-	-	81 ft
				33 km	-		81 m
32R	DME	IER	109.10 MHz	18 nm	-	-	70 ft
				33 km	-		70 m
14L	LOC-ILS	IEL	108.50 MHz	18 nm	146.20	-	68 ft
				33 km	146.14		68 m
14R	LOC-ILS	IWR	110.70 MHz	18 nm	146.21	-	68 ft
				33 km	146.15		68 m
15	LOC-ILS	IWK	110.10 MHz	18 nm	146.21	-	68 ft
				33 km	146.15		68 m
32L	LOC-ILS	IWL	111.90 MHz	18 nm	326.21	-	68 ft
				33 km	326.15		68 m
32R	LOC-ILS	IER	109.10 MHz	18 nm	326.20	-	68 ft
				33 km	326.14		68 m
33	LOC-ILS	IWM	111.50 MHz	18 nm	326.21	-	68 ft
				33 km	326.15		68 m
14L	GS	IEL	108.50 MHz	10 nm	146.20	3.00	68 ft
				19 km	146.14		68 m
14R	GS	IWR	110.70 MHz	10 nm	146.21	3.00	68 ft
				19 km	146.15		68 m
15	GS	IWK	110.10 MHz	10 nm	146.21	3.00	68 ft
				19 km	146.15		68 m
32L	GS	IWL	111.90 MHz	10 nm	326.21	3.00	68 ft
				19 km	326.15		68 m
32R	GS	IER	109.10 MHz	10 nm	326.20	3.00	68 ft
				19 km	326.14		68 m
33	GS	IWM	111.50 MHz	10 nm	326.21	3.00	68 ft
				19 km	326.15		68 m

OMDB

Region: UNITED ARAB EMIRATES
Timezone: ASIA/DUBAI
Runways: 2

Elevation: 62 ft / 19 m
Location: 25.251100 55.371100
Magnetic Var: 2.353 E

METAR

OMDB 110900Z 33008KT 290V360 CAVOK 32/20 Q1009 NOSIG

TAF

TAF OMDB 110500Z 1106/1212 21005KT 8000 NSC BECMG 1106/1108 33013KT BECMG 1117/1119 10005KT PROB30 1200/1204 4000

Frequencies

REC - 126.27 MHz - ATIS ARRIVAL	REC - 131.70 MHz - ATIS DEPARTURE
TWR - 126.77 MHz - DUBAI TOWER	TWR - 119.55 MHz - DUBAI TOWER
TWR - 118.75 MHz - DUBAI TOWER	TWR - 119.05 MHz - DUBAI TOWER
GND - 118.35 MHz - DUBAI GROUND	GND - 118.85 MHz - DUBAI GROUND
GND - 121.65 MHz - DUBAI GROUND	CLD - 120.35 MHz - CLEARANCE DELIVERY
APP - 122.50 MHz - MINHAD APPROACH	APP - 126.02 MHz - MINHAD APPROACH
APP - 120.25 MHz - DUBAI ARRIVAL	APP - 124.45 MHz - DUBAI ARRIVAL
APP - 124.90 MHz - DUBAI ARRIVAL	DEP - 126.02 MHz - DUBAI DEPARTURE
DEP - 121.02 MHz - DUBAI DEPARTURE	DEP - 126.20 MHz - DUBAI DEPARTURE
DEP - 120.25 MHz - DUBAI DEPARTURE	APP - 120.40 MHz - DUBAI RADAR
APP - 126.02 MHz - DUBAI RADAR	APP - 127.90 MHz - DUBAI DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	200 ft	14,604 ft	121.53	ASPHALT	2,352 ft	771 ft
	61 m	4,452 m	119.17		717 m	235 m
30L	200 ft	14,604 ft	301.54	ASPHALT	436 ft	0 ft
	61 m	4,452 m	299.19		133 m	0 m
12L	200 ft	14,289 ft	121.48	ASPHALT	1,496 ft	381 ft
	61 m	4,355 m	119.13		456 m	116 m
30R	200 ft	14,289 ft	301.50	ASPHALT	991 ft	377 ft
	61 m	4,355 m	299.15		302 m	115 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IDBL	110.10 MHz	18 nm	-	-	62 ft
				33 km	-		62 m
30L	DME	IDBW	111.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
30R	DME	IDBR	110.90 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
12L	LOC-ILS	IDBL	110.10 MHz	18 nm	121.49	-	62 ft
				33 km	119.14		62 m
12R	LOC-ILS	IDBE	109.50 MHz	18 nm	121.54	-	62 ft
				33 km	119.19		62 m
30L	LOC-ILS	IDBW	111.30 MHz	18 nm	301.54	-	62 ft
				33 km	299.19		62 m
30R	LOC-ILS	IDBR	110.90 MHz	18 nm	301.49	-	62 ft
				33 km	299.14		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	GS	IDBL	110.10 MHz	10 nm	121.49	3.00	62 ft
				19 km	119.14		62 m
12R	GS	IDBE	109.50 MHz	10 nm	121.54	3.00	62 ft
				19 km	119.19		62 m
30L	GS	IDBW	111.30 MHz	10 nm	301.54	3.00	62 ft
				19 km	299.19		62 m
30R	GS	IDBR	110.90 MHz	10 nm	301.49	3.00	62 ft
				19 km	299.14		62 m