


2024/05/23 1147Z

LTAF SELVI **L601** URGUP LTAC

217.74 nm / 403.25 km

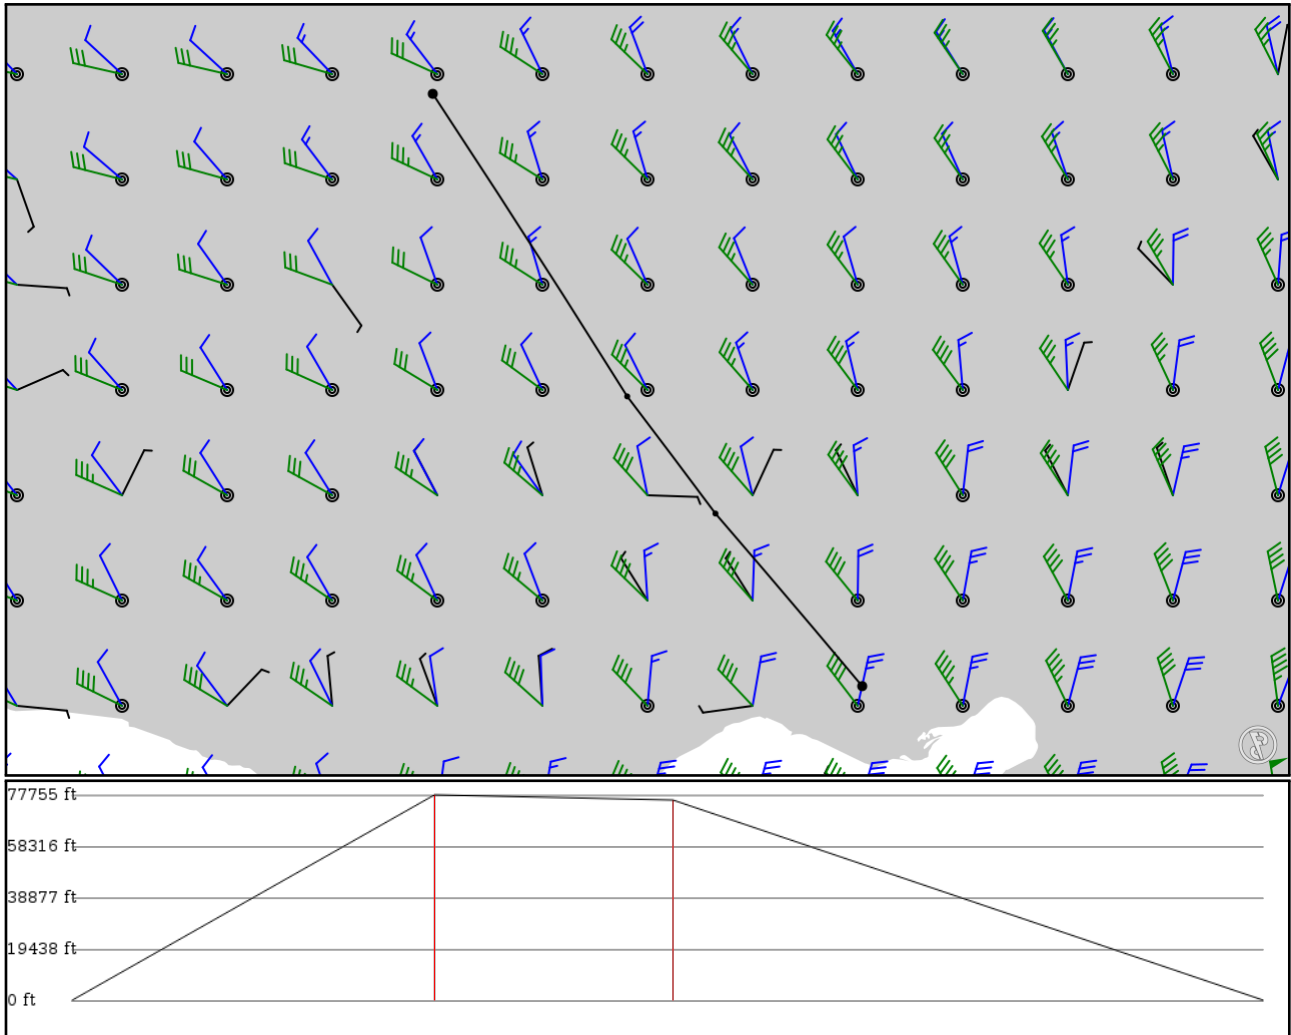

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 32000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LTAF	-	36.98214	0 ft	-	ADANA
APT	-	35.28039	0 m		
SELVI	-	37.89889	23,700 ft	66	-
FIX	-	34.49944	7,224 m		
URGUP	L601	38.52111	23,100 ft	43	-
FIX	AWY-LO	34.03000	7,041 m		
LTAC	-	40.12828	0 ft	107	ESENBGA
APT	-	32.99540	0 m		

## LTAF

Region: TURKEY  
Timezone: EUROPE/ISTANBUL  
Runways: 1

Elevation: 63 ft / 19 m  
Location: 36.982200 35.280300  
Magnetic Var: 5.913 E

## METAR

LTAF 231120Z 20009KT 150V220 9999 SCT035 BKN100 29/21 Q1008 NOSIG RMK RWY23 21009KT 170V230 3CU035 5AC100

## TAF

TAF LTAF 230440Z 2306/2406 VRB02KT 9999 SCT035 BKN100 BECMG 2309/2311 20012KT BECMG 2316/2318 VRB02KT TEMPO 2318/

## Frequencies

REC - 119.22 MHz - ADANA ATIS  
TWR - 121.10 MHz - ADANA TOWER

GND - 121.90 MHz - ADANA GROUND CONTROL  
APP - 126.50 MHz - INCIRLIK APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	148 ft	9,020 ft	53.46	ASPHALT	0 ft	0 ft
	45 m	2,749 m	47.54		0 m	0 m
23	148 ft	9,020 ft	233.47	ASPHALT	0 ft	0 ft
	45 m	2,749 m	227.56		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	IADA	108.70 MHz	18 nm	53.01	-	65 ft
				33 km	47.10		65 m
05	GS	IADA	108.70 MHz	10 nm	53.92	3.00	65 ft
				19 km	48.01		65 m

## LTAC

Region: TURKEY  
Timezone: EUROPE/ISTANBUL  
Runways: 2

Elevation: 3,125 ft / 953 m  
Location: 40.128100 32.995000  
Magnetic Var: 6.324 E

## METAR

LTAC 231120Z VRB03KT 9999 SCT040 BKN100 23/09 Q1011 NOSIG RMK RWY21L 25005KT 170V320 RWY03L 28004KT 230V340 RWY21R

## TAF

TAF TAF LTAC 230440Z 2306/2406 VRB02KT 9999 SCT040 SCT100 TEMPO 2306/2310 -SHRA FEW025CB BKN030 BKN080 TEMPO 2310/2318

## Frequencies

REC - 123.60 MHz - D-ATIS  
GND - 121.90 MHz - ESENBOA GROUND

TWR - 118.10 MHz - ESENBOA TOWER  
APP - 119.10 MHz - ESENBOA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03L	148 ft	11,128 ft	36.04	CONCRETE	0 ft	0 ft
	45 m	3,392 m	29.72		0 m	0 m
21R	148 ft	11,128 ft	216.06	CONCRETE	0 ft	0 ft
	45 m	3,392 m	209.73		0 m	0 m
03R	197 ft	12,316 ft	36.10	CONCRETE	0 ft	0 ft
	60 m	3,754 m	29.77		0 m	0 m
21L	197 ft	12,316 ft	216.12	CONCRETE	0 ft	0 ft
	60 m	3,754 m	209.79		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	LOC-ILS	IAKR	108.90 MHz	18 nm	35.62	-	3,125 ft
				33 km	29.29		3,125 m
03R	LOC-ILS	IANK	110.30 MHz	18 nm	35.48	-	3,125 ft
				33 km	29.15		3,125 m
21L	LOC-ILS	IESB	108.10 MHz	18 nm	216.08	-	3,097 ft
				33 km	209.76		3,097 m
21R	LOC-ILS	IEBG	108.30 MHz	18 nm	217.00	-	3,125 ft
				33 km	210.68		3,125 m
03L	GS	IAKR	108.90 MHz	10 nm	36.40	3.00	3,125 ft
				19 km	30.07		3,125 m
03R	GS	IANK	110.30 MHz	10 nm	35.60	3.00	3,125 ft
				19 km	29.28		3,125 m
21L	GS	IESB	108.10 MHz	10 nm	215.60	3.00	3,125 ft
				19 km	209.28		3,125 m
21R	GS	IEBG	108.30 MHz	10 nm	216.40	3.00	3,125 ft
				19 km	210.07		3,125 m