

VHHH

Hong Kong Intl


YPPH

Perth International

2024/05/13 0655Z

VHHH CH **A583** MAVRA **N892** MIGUG 1500N11400E ARESI 1300N11500E DODUG VAVUM 1100N11500E 1000N11600E
TENON **M754** VINIK **M522** BLI **G578** EGATU **L514** REVOP YPPH

3423.11 nm / 6339.60 km

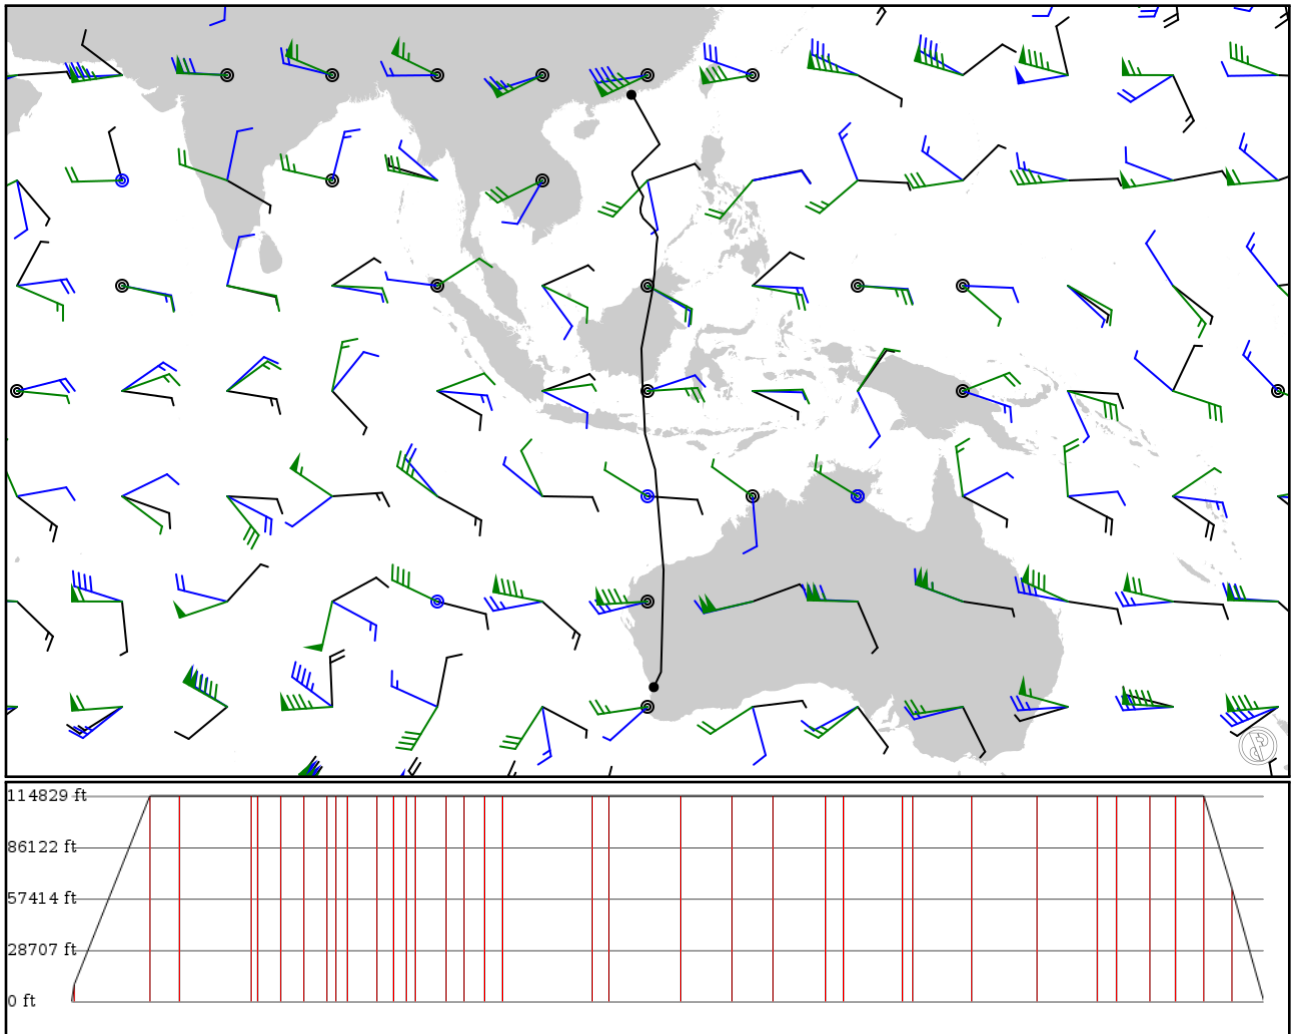

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VHHH APT	-	22.30890 113.91500	0 ft 0 m	-	Hong Kong Intl
CH VOR	-	22.21950 114.03000	2,900 ft 884 m	8	CHEUNG CHAU
SABNO FIX	A583 AWY-HI	18.98500 115.84500	35,000 ft 10,668 m	219	-
MAVRA FIX	A583 AWY-HI	17.77780 116.50200	35,000 ft 10,668 m	81	-
MIGUG FIX	N892 AWY-HI	15.27330 114.00000	35,000 ft 10,668 m	208	-
1500N11400E LATLON	-	15.00000 114.00000	35,000 ft 10,668 m	16	-
ARESI FIX	-	13.97330 114.45000	35,000 ft 10,668 m	66	-
1300N11500E LATLON	-	13.00000 115.00000	35,000 ft 10,668 m	66	-
DODUG FIX	-	11.95080 114.74300	35,000 ft 10,668 m	64	-
VAVUM FIX	-	11.49580 114.76500	35,000 ft 10,668 m	27	-
1100N11500E LATLON	-	11.00000 115.00000	35,000 ft 10,668 m	32	-
1000N11600E LATLON	-	10.00000 116.00000	35,000 ft 10,668 m	84	-
TENON FIX	-	9.27446 116.30700	35,000 ft 10,668 m	47	-
VINIK FIX	M754 AWY-HI	8.64167 116.23000	35,000 ft 10,668 m	38	-
NODIN FIX	M522 AWY-HI	8.18333 116.19500	35,000 ft 10,668 m	27	-
ENBAX FIX	M522 AWY-HI	6.73405 116.09200	35,000 ft 10,668 m	87	-
VJN VOR	M522 AWY-HI	5.89925 116.03400	35,000 ft 10,668 m	50	KOTA KINABALU
ELPOX FIX	M522 AWY-HI	4.88772 115.89600	35,000 ft 10,668 m	61	-
MAMOK FIX	M522 AWY-HI	4.08500 115.78700	35,000 ft 10,668 m	48	-
NUGRO FIX	M522 AWY-HI	-0.16420 114.97900	35,000 ft 10,668 m	259	-
ELANG FIX	M522 AWY-HI	-0.92657 114.83400	35,000 ft 10,668 m	46	-
KEVOK FIX	M522 AWY-HI	-4.34093 114.94200	35,000 ft 10,668 m	205	-
GALKO FIX	M522 AWY-HI	-6.82653 115.08200	35,000 ft 10,668 m	149	-
BLI VOR	M522 AWY-HI	-8.75057 115.16300	35,000 ft 10,668 m	115	BALI (DEN PASAR)
LIPRA FIX	G578 AWY-HI	-11.17130 115.83800	35,000 ft 10,668 m	150	-
EGATU FIX	G578 AWY-HI	-12.00000 116.09300	35,000 ft 10,668 m	51	-
LAXAR	L514	-14.79510	35,000 ft	168	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	116.32000	10,668 m		
LILLY	L514	-15.33430	35,000 ft	32	-
FIX	AWY-HI	116.36500	10,668 m		
OSOTO	L514	-18.12100	35,000 ft	167	-
FIX	AWY-HI	116.59800	10,668 m		
MUNNI	L514	-21.20940	35,000 ft	186	-
FIX	AWY-HI	116.86600	10,668 m		
COBRA	L514	-24.11020	35,000 ft	174	-
FIX	AWY-HI	116.79700	10,668 m		
BANKS	L514	-25.02000	35,000 ft	54	-
FIX	AWY-HI	116.77500	10,668 m		
SCRUB	L514	-26.63850	35,000 ft	97	-
FIX	AWY-HI	116.73500	10,668 m		
PALTI	L514	-27.85250	35,000 ft	72	-
FIX	AWY-HI	116.70300	10,668 m		
TOPIR	L514	-29.18330	35,000 ft	79	-
FIX	AWY-HI	116.66900	10,668 m		
REVOP	L514	-30.55350	19,200 ft	82	-
FIX	AWY-HI	116.63200	5,852 m		
YPPH	-	-31.93980	0 ft	89	Perth International
APT	-	115.96700	0 m		

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.238 W

METAR

VHHH 130630Z 32008KT 9999 FEW018 SCT030 29/21 Q1010 NOSIG

TAF

TAF VHHH 130500Z 1306/1412 30010KT 9999 FEW015 SCT025 TX30/1306Z TX30/1406Z TN24/1322Z BECMG 1307/1309 09015KT BE

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.02		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m

YPPH

Region: AUSTRALIA
Timezone: AUSTRALIA/PERTH
Runways: 2

Elevation: 67 ft / 20 m
Location: -31.939800 115.967000
Magnetic Var: 1.732 W

METAR

YPPH 130630Z 08012KT CAVOK 29/02 Q1012

TAF

TAF YPPH 130504Z 1306/1412 08013KT CAVOK FM131500 10010KT 9999 -SHRA NSC FM140100 08010KT CAVOK FM140600 21008KT C

Frequencies

REC - 113.70 MHz - PERTH ATIS
DEP - 118.70 MHz - PERTH DEPARTURE
GND - 121.70 MHz - PERTH GROUND WEST
CLD - 118.55 MHz - PERTH CLEARANCE DELIVERY
APP - 123.60 MHz - PERTH APPROACH
TWR - 127.40 MHz - PERTH TOWER
GND - 122.20 MHz - PERTH GROUND EAST

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	7,100 ft	58.88	ASPHALT	0 ft	217 ft
	45 m	2,164 m	60.62		0 m	66 m
24	148 ft	7,100 ft	238.87	ASPHALT	0 ft	220 ft
	45 m	2,164 m	240.61		0 m	67 m
03	148 ft	11,307 ft	13.88	ASPHALT	0 ft	302 ft
	45 m	3,446 m	15.61		0 m	92 m
21	148 ft	11,307 ft	193.88	ASPHALT	0 ft	210 ft
	45 m	3,446 m	195.61		0 m	64 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03	DME	IPN	110.10 MHz	18 nm	-	-	75 ft
				33 km	-		75 m
21	DME	IGD	109.50 MHz	18 nm	-	-	67 ft
				33 km	-		67 m
24	DME	IPH	109.90 MHz	18 nm	-	-	67 ft
				33 km	-		67 m
03	LOC-ILS	IPN	110.10 MHz	18 nm	13.88	-	67 ft
				33 km	15.61		67 m
21	LOC-ILS	IGD	109.50 MHz	18 nm	193.87	-	67 ft
				33 km	195.60		67 m
24	LOC-ILS	IPH	109.90 MHz	18 nm	238.88	-	67 ft
				33 km	240.61		67 m
03	GS	IPN	110.10 MHz	10 nm	13.88	3.00	67 ft
				19 km	15.61		67 m
21	GS	IGD	109.50 MHz	10 nm	193.87	3.00	67 ft
				19 km	195.60		67 m
24	GS	IPH	109.90 MHz	10 nm	238.88	3.00	67 ft
				19 km	240.61		67 m