

UDD

Moscou Domodedovo

—


UUE

Moscou Sheremetyevo

2024/05/14 2159Z

UDD WT UUE

37.72 nm / 69.86 km

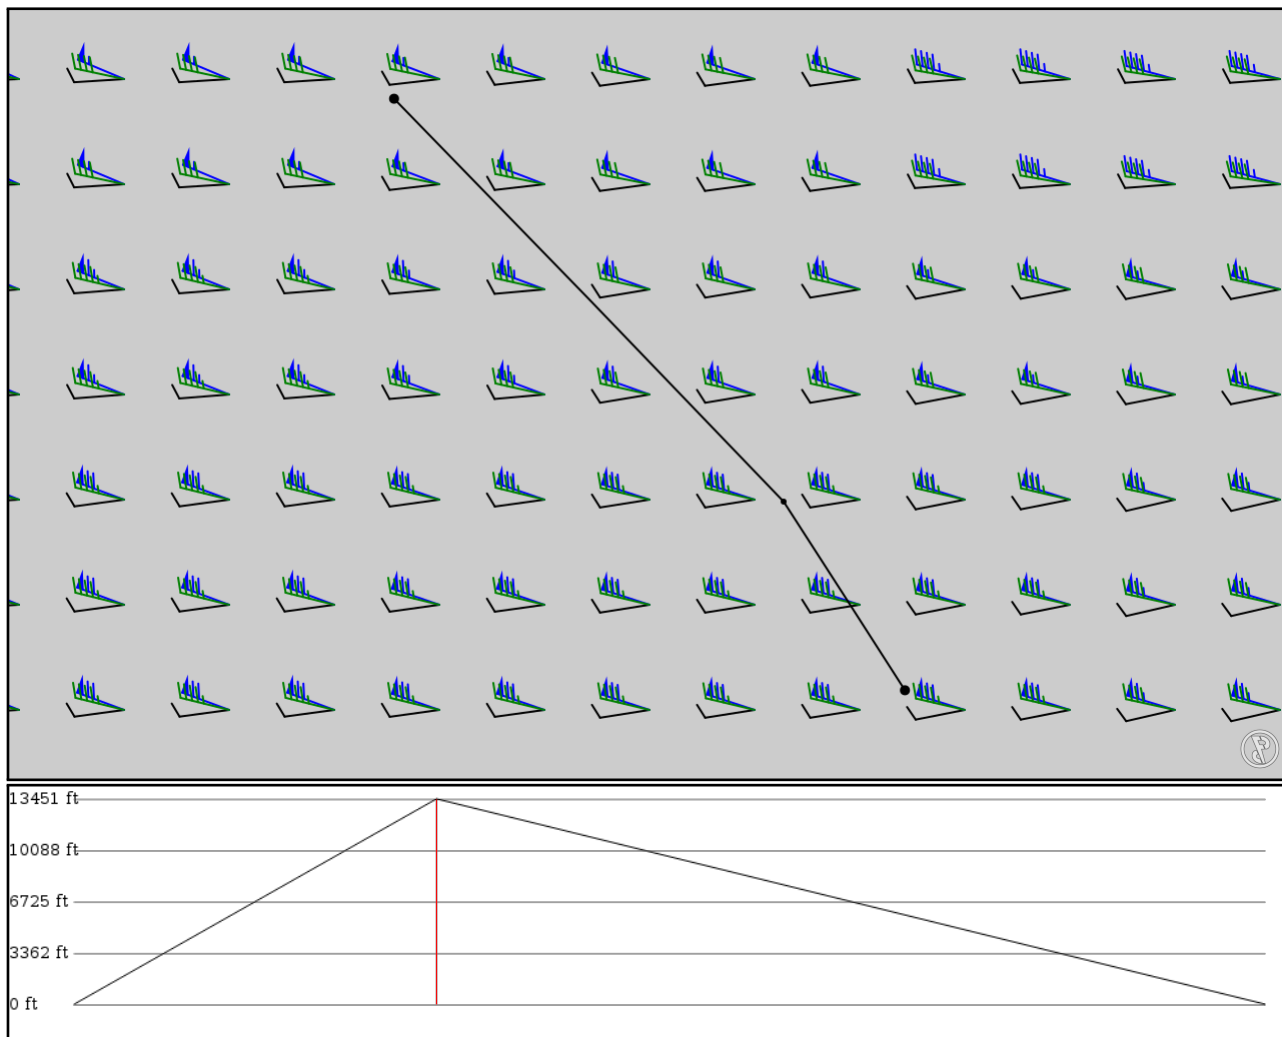

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
UDD	-	55.40919	0 ft	-	Moscou Domodedovo
APT	-	37.90143	0 m		
WT	-	55.58889	4,100 ft	11	KARTINO NDB
NDB	-	37.78583	1,250 m		
UUEE	-	55.97264	0 ft	26	Moscou Sheremetyevo
APT	-	37.41459	0 m		

UDD

Region: RUSSIA
Timezone: EUROPE/MOSCOW
Runways: 2

Elevation: 592 ft / 180 m
Location: 55.409200 37.907500
Magnetic Var: 11.824 E

METAR

UDD 142130Z VRB01MPS CAVOK 04/02 Q1024 R32L/CLRD60 NOSIG

TAF

TAF UDD 141951Z 1421/1603 VRB01MPS 9999 SCT040 TX16/1512Z TN02/1502Z

Frequencies

APP - 125.30 MHz - DOMODEDOVO RADAR	APP - 129.80 MHz - DOMODEDOVO RADAR
APP - 127.70 MHz - DOMODEDOVO RADAR	APP - 119.40 MHz - DOMODEDOVO RADAR
APP - 132.05 MHz - DOMODEDOVO RADAR	APP - 134.67 MHz - DOMODEDOVO RADAR
TWR - 118.60 MHz - DOMODEDOVO TOWER	TWR - 119.70 MHz - DOMODEDOVO TOWER
TWR - 127.30 MHz - DOMODEDOVO TOWER	CLD - 129.15 MHz - DOMODEDOVO DELIVERY
REC - 128.30 MHz - ATIS	REC - 122.95 MHz - ATIS
GND - 119.00 MHz - DOMODEDOVO APRON	APP - 118.95 MHz - MOSCOW APPROACH
APP - 118.55 MHz - MOSCOW APPROACH	APP - 130.37 MHz - MOSCOW APPROACH
APP - 124.20 MHz - MOSCOW APPROACH	APP - 127.20 MHz - MOSCOW APPROACH
APP - 128.00 MHz - MOSCOW APPROACH	APP - 134.00 MHz - MOSCOW APPROACH
APP - 131.20 MHz - MOSCOW APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14L	174 ft	7,762 ft	145.68	CONCRETE	0 ft	0 ft
	53 m	2,366 m	133.85		0 m	0 m
32R	174 ft	7,762 ft	325.70	CONCRETE	0 ft	0 ft
	53 m	2,366 m	313.87		0 m	0 m
14R	197 ft	11,459 ft	145.68	CONCRETE	0 ft	0 ft
	60 m	3,493 m	133.85		0 m	0 m
32L	197 ft	11,459 ft	325.70	CONCRETE	0 ft	0 ft
	60 m	3,493 m	313.88		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32R	DME	IDE	111.90 MHz	18 nm	-	-	588 ft
				33 km	-		588 m
14R	LOC-ILS	IDM	110.10 MHz	18 nm	145.70	-	592 ft
				33 km	133.88		592 m
32L	LOC-ILS	IDO	109.30 MHz	18 nm	325.70	-	592 ft
				33 km	313.88		592 m
14R	GS	IDM	110.10 MHz	10 nm	145.70	3.00	592 ft
				19 km	133.88		592 m
32L	GS	IDO	109.30 MHz	10 nm	325.70	3.00	592 ft
				19 km	313.88		592 m

UUEE

Region: RUSSIA
Timezone: EUROPE/MOSCOW
Runways: 3

Elevation: 630 ft / 192 m
Location: 55.972500 37.413100
Magnetic Var: 11.979 E

METAR

UUEE 142130Z VRB01MPS CAVOK 08/03 Q1024 R24C/CLRD62 NOSIG

TAF

TAF UUEE 141954Z 1421/1521 33003MPS 9999 SCT035 TX17/1512Z TN02/1503Z

Frequencies

REC - 122.07 MHz - SHEREMETYEVO ATIS ARRIVAL	REC - 125.12 MHz - SHEREMETYEVO ATIS DEPARTURE
REC - 120.37 MHz - SHEREMETYEVO ATIS ARRIVAL	REC - 126.37 MHz - SHEREMETYEVO ATIS DEPARTURE
TWR - 131.50 MHz - SHEREMETYEVO TOWER	TWR - 120.70 MHz - SHEREMETYEVO TOWER
TWR - 118.70 MHz - SHEREMETYEVO TOWER	TWR - 119.30 MHz - SHEREMETYEVO TOWER
GND - 119.00 MHz - SHEREMETYEVO GROUND	GND - 121.80 MHz - SHEREMETYEVO GROUND
GND - 122.90 MHz - SHEREMETYEVO GROUND	GND - 121.90 MHz - SHEREMETYEVO APRON 1
GND - 123.60 MHz - SHEREMETYEVO APRON 2	GND - 130.35 MHz - SHEREMETYEVO APRON 3
GND - 134.55 MHz - SHEREMETYEVO APRON 4	CLD - 128.60 MHz -
CLD - 120.87 MHz -	SHEREMETYEVO CLEARANCE DELIVERY
SHEREMETYEVO CLEARANCE DELIVERY	APP - 122.70 MHz - SHEREMETYEVO RADAR
APP - 135.17 MHz - SHEREMETYEVO RADAR	APP - 118.10 MHz - SHEREMETYEVO RADAR
APP - 126.60 MHz - SHEREMETYEVO RADAR	APP - 120.67 MHz - SHEREMETYEVO RADAR
APP - 127.20 MHz - MOSCOW APPROACH	APP - 128.00 MHz - MOSCOW APPROACH
APP - 134.00 MHz - MOSCOW APPROACH	APP - 131.20 MHz - MOSCOW APPROACH
APP - 118.95 MHz - MOSCOW APPROACH	APP - 118.55 MHz - MOSCOW APPROACH
APP - 130.37 MHz - MOSCOW APPROACH	APP - 124.20 MHz - MOSCOW APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	10,467 ft	74.98	CONCRETE	0 ft	0 ft
	60 m	3,190 m	63.00		0 m	0 m
24R	197 ft	10,467 ft	255.02	CONCRETE	0 ft	0 ft
	60 m	3,190 m	243.05		0 m	0 m
06C	197 ft	11,611 ft	75.03	CONCRETE	0 ft	0 ft
	60 m	3,539 m	63.05		0 m	0 m
24C	197 ft	11,611 ft	255.07	CONCRETE	0 ft	0 ft
	60 m	3,539 m	243.09		0 m	0 m
06R	197 ft	12,101 ft	75.03	CONCRETE	0 ft	0 ft
	60 m	3,689 m	63.05		0 m	0 m
24L	197 ft	12,101 ft	255.07	CONCRETE	0 ft	0 ft
	60 m	3,689 m	243.10		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IMA	108.75 MHz	18 nm	75.00	-	630 ft
				33 km	63.02		630 m
06C	LOC-ILS	IMR	108.10 MHz	18 nm	75.05	-	630 ft
				33 km	63.07		630 m
06R	LOC-ILS	INL	109.10 MHz	18 nm	75.05	-	630 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	63.07		630 m
24L	LOC-ILS	IBW	110.50 MHz	18 nm	255.05	-	630 ft
				33 km	243.07		630 m
24C	LOC-ILS	IAD	111.30 MHz	18 nm	255.05	-	630 ft
				33 km	243.07		630 m
24R	LOC-ILS	IBR	109.35 MHz	18 nm	255.00	-	630 ft
				33 km	243.02		630 m
06L	GS	IMA	108.75 MHz	10 nm	75.00	3.00	630 ft
				19 km	63.02		630 m
06C	GS	IMR	108.10 MHz	10 nm	75.05	2.98	630 ft
				19 km	63.07		630 m
06R	GS	INL	109.10 MHz	10 nm	75.05	2.98	630 ft
				19 km	63.07		630 m
24L	GS	IBW	110.50 MHz	10 nm	255.05	2.98	630 ft
				19 km	243.07		630 m
24C	GS	IAD	111.30 MHz	10 nm	255.05	2.98	630 ft
				19 km	243.07		630 m
24R	GS	IBR	109.35 MHz	10 nm	255.00	3.00	630 ft
				19 km	243.02		630 m