


2024/05/15 2026Z

OAKB PATOX **A453** DAVEP **Q10** MOBET OMDB

936.79 nm / 1734.93 km

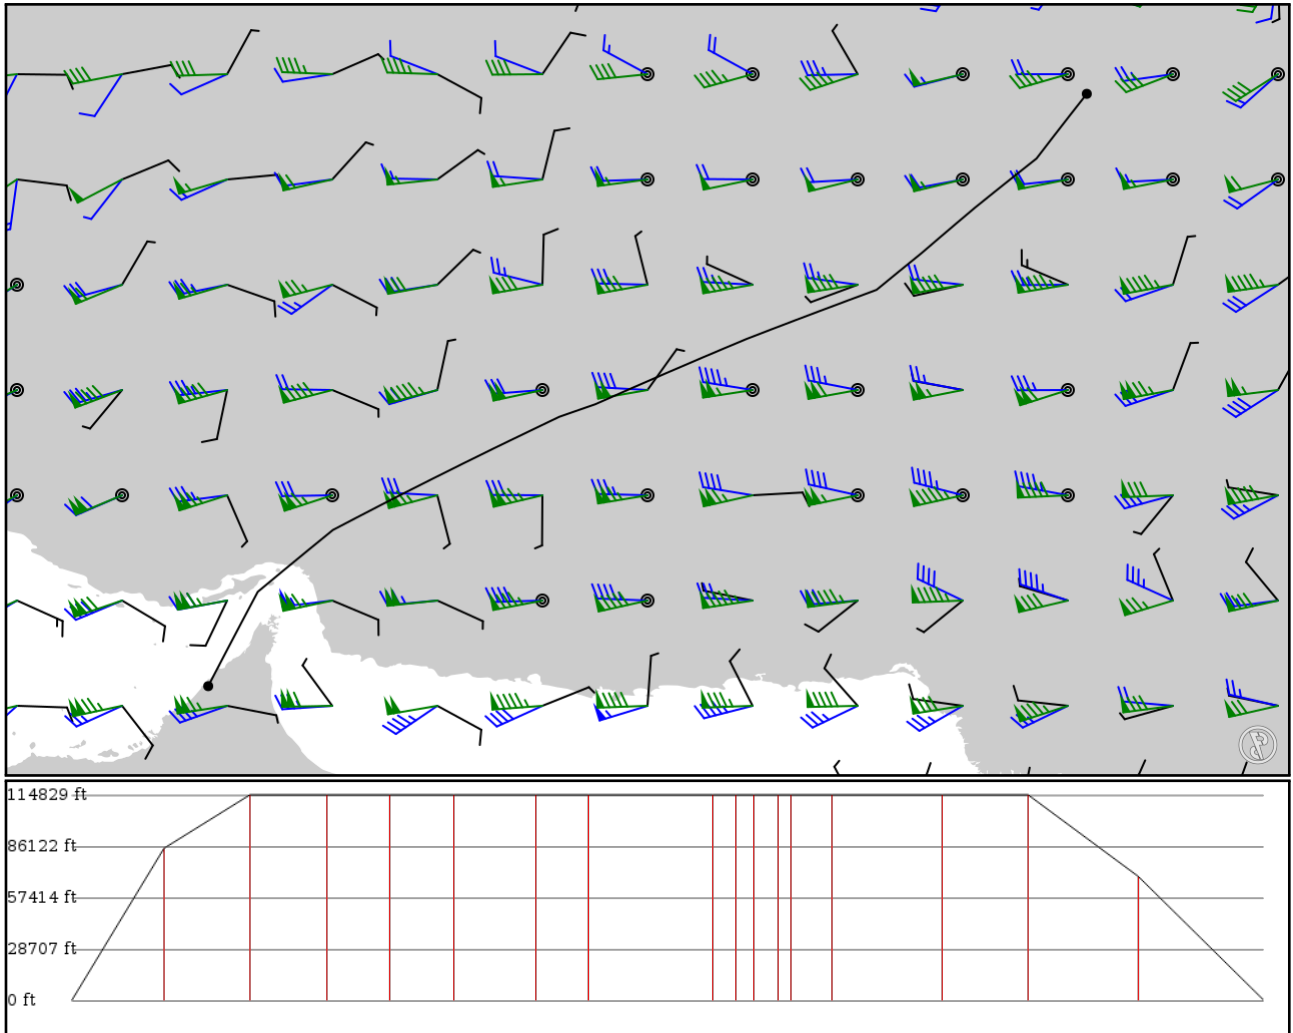

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OAKB	-	34.56580	0 ft	-	Kabul Intl
APT	-	69.21250	0 m	-	
PATOX	-	33.54830	25,900 ft	72	-
FIX	-	68.42000	7,894 m	-	
DUDEG	A453	32.77500	35,000 ft	67	-
FIX	AWY-LO	67.45000	10,668 m	-	
KUNAN	A453	32.05940	35,000 ft	60	-
FIX	AWY-LO	66.60750	10,668 m	-	
PAROD	A453	31.48330	35,000 ft	50	-
FIX	AWY-LO	65.90000	10,668 m	-	
LOVIT	A453	31.15110	35,000 ft	49	-
FIX	AWY-LO	65.00720	10,668 m	-	
VACUK	A453	30.71220	35,000 ft	64	-
FIX	AWY-LO	63.85530	10,668 m	-	
OGOGO	A453	30.41580	35,000 ft	40	-
FIX	AWY-LO	63.15110	10,668 m	-	
GADER	A453	29.68330	35,000 ft	97	-
FIX	AWY-LO	61.46670	10,668 m	-	
PIRAN	A453	29.56860	35,000 ft	18	-
FIX	AWY-LO	61.13580	10,668 m	-	
ZDN	A453	29.48670	35,000 ft	13	ZAHEDAN
VOR	AWY-HI	60.90160	10,668 m	-	
ULOVI	A453	29.33000	35,000 ft	19	-
FIX	AWY-HI	60.57470	10,668 m	-	
DANOV	A453	29.24560	35,000 ft	10	-
FIX	AWY-HI	60.39920	10,668 m	-	
PEKES	A453	28.99140	35,000 ft	31	-
FIX	AWY-HI	59.87250	10,668 m	-	
NABOX	A453	28.27500	35,000 ft	87	-
FIX	AWY-HI	58.43360	10,668 m	-	
DAVEP	A453	27.70720	35,000 ft	67	-
FIX	AWY-HI	57.33580	10,668 m	-	
MOBET	Q10	26.73500	21,100 ft	86	-
FIX	AWY-HI	56.15220	6,431 m	-	
OMDB	-	25.25110	0 ft	98	Dubai Intl
APT	-	55.37110	0 m	-	

OAKB

Region: AFGHANISTAN
Timezone: ASIA/KABUL
Runways: 1

Elevation: 5,876 ft / 1,791 m
Location: 34.565800 69.212500
Magnetic Var: 3.532 E

METAR

UNKNOWN

TAF

UNKNOWN

Frequencies

REC - 130.15 MHz - ATIS	CLD - 128.10 MHz - KABUL CLEARANCE DELIVERY
GND - 120.27 MHz - KABUL GROUND	TWR - 120.60 MHz - KABUL TOWER
APP - 131.60 MHz - KABUL APPROACH	APP - 118.30 MHz - KABUL CENTER
DEP - 132.50 MHz - KABUL DEPARTURE	TWR - 123.40 MHz - AIROPS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	148 ft	11,501 ft	107.33	ASPHALT	0 ft	148 ft
	45 m	3,505 m	103.80		0 m	45 m
29	148 ft	11,501 ft	287.35	ASPHALT	0 ft	144 ft
	45 m	3,505 m	283.82		0 m	44 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
29	LOC-ILS	IAKW	110.50 MHz	18 nm	287.34	-	5,876 ft
				33 km	283.81		5,876 m
29	GS	IAKW	110.50 MHz	10 nm	287.34	3.50	5,876 ft
				19 km	283.81		5,876 m

OMDB

Region: UNITED ARAB EMIRATES
Timezone: ASIA/DUBAI
Runways: 2

Elevation: 62 ft / 19 m
Location: 25.251100 55.371100
Magnetic Var: 2.353 E

METAR

OMDB 152000Z 07006KT 030V110 CAVOK 33/16 Q1009 NOSIG

TAF

TAF OMDB 151700Z 1518/1700 08007KT CAVOK BECMG 1602/1604 18013KT BECMG 1608/1610 30015KT BECMG 1615/1617 09005KT

Frequencies

REC - 126.27 MHz - ATIS ARRIVAL	REC - 131.70 MHz - ATIS DEPARTURE
TWR - 126.77 MHz - DUBAI TOWER	TWR - 119.55 MHz - DUBAI TOWER
TWR - 118.75 MHz - DUBAI TOWER	TWR - 119.05 MHz - DUBAI TOWER
GND - 118.35 MHz - DUBAI GROUND	GND - 118.85 MHz - DUBAI GROUND
GND - 121.65 MHz - DUBAI GROUND	CLD - 120.35 MHz - CLEARANCE DELIVERY
APP - 122.50 MHz - MINHAD APPROACH	APP - 126.02 MHz - MINHAD APPROACH
APP - 120.25 MHz - DUBAI ARRIVAL	APP - 124.45 MHz - DUBAI ARRIVAL
APP - 124.90 MHz - DUBAI ARRIVAL	DEP - 126.02 MHz - DUBAI DEPARTURE
DEP - 121.02 MHz - DUBAI DEPARTURE	DEP - 126.20 MHz - DUBAI DEPARTURE
DEP - 120.25 MHz - DUBAI DEPARTURE	APP - 120.40 MHz - DUBAI RADAR
APP - 126.02 MHz - DUBAI RADAR	APP - 127.90 MHz - DUBAI DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	200 ft	14,604 ft	121.53	ASPHALT	2,352 ft	771 ft
	61 m	4,452 m	119.17		717 m	235 m
30L	200 ft	14,604 ft	301.54	ASPHALT	436 ft	0 ft
	61 m	4,452 m	299.19		133 m	0 m
12L	200 ft	14,289 ft	121.48	ASPHALT	1,496 ft	381 ft
	61 m	4,355 m	119.13		456 m	116 m
30R	200 ft	14,289 ft	301.50	ASPHALT	991 ft	377 ft
	61 m	4,355 m	299.15		302 m	115 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IDBL	110.10 MHz	18 nm	-	-	62 ft
				33 km	-		62 m
30L	DME	IDBW	111.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
30R	DME	IDBR	110.90 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
12L	LOC-ILS	IDBL	110.10 MHz	18 nm	121.49	-	62 ft
				33 km	119.14		62 m
12R	LOC-ILS	IDBE	109.50 MHz	18 nm	121.54	-	62 ft
				33 km	119.19		62 m
30L	LOC-ILS	IDBW	111.30 MHz	18 nm	301.54	-	62 ft
				33 km	299.19		62 m
30R	LOC-ILS	IDBR	110.90 MHz	18 nm	301.49	-	62 ft
				33 km	299.14		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	GS	IDBL	110.10 MHz	10 nm	121.49	3.00	62 ft
				19 km	119.14		62 m
12R	GS	IDBE	109.50 MHz	10 nm	121.54	3.00	62 ft
				19 km	119.19		62 m
30L	GS	IDBW	111.30 MHz	10 nm	301.54	3.00	62 ft
				19 km	299.19		62 m
30R	GS	IDBR	110.90 MHz	10 nm	301.49	3.00	62 ft
				19 km	299.14		62 m