


2024/06/05 1645Z

KMCO DIDDY KMIA

167.22 nm / 309.69 km

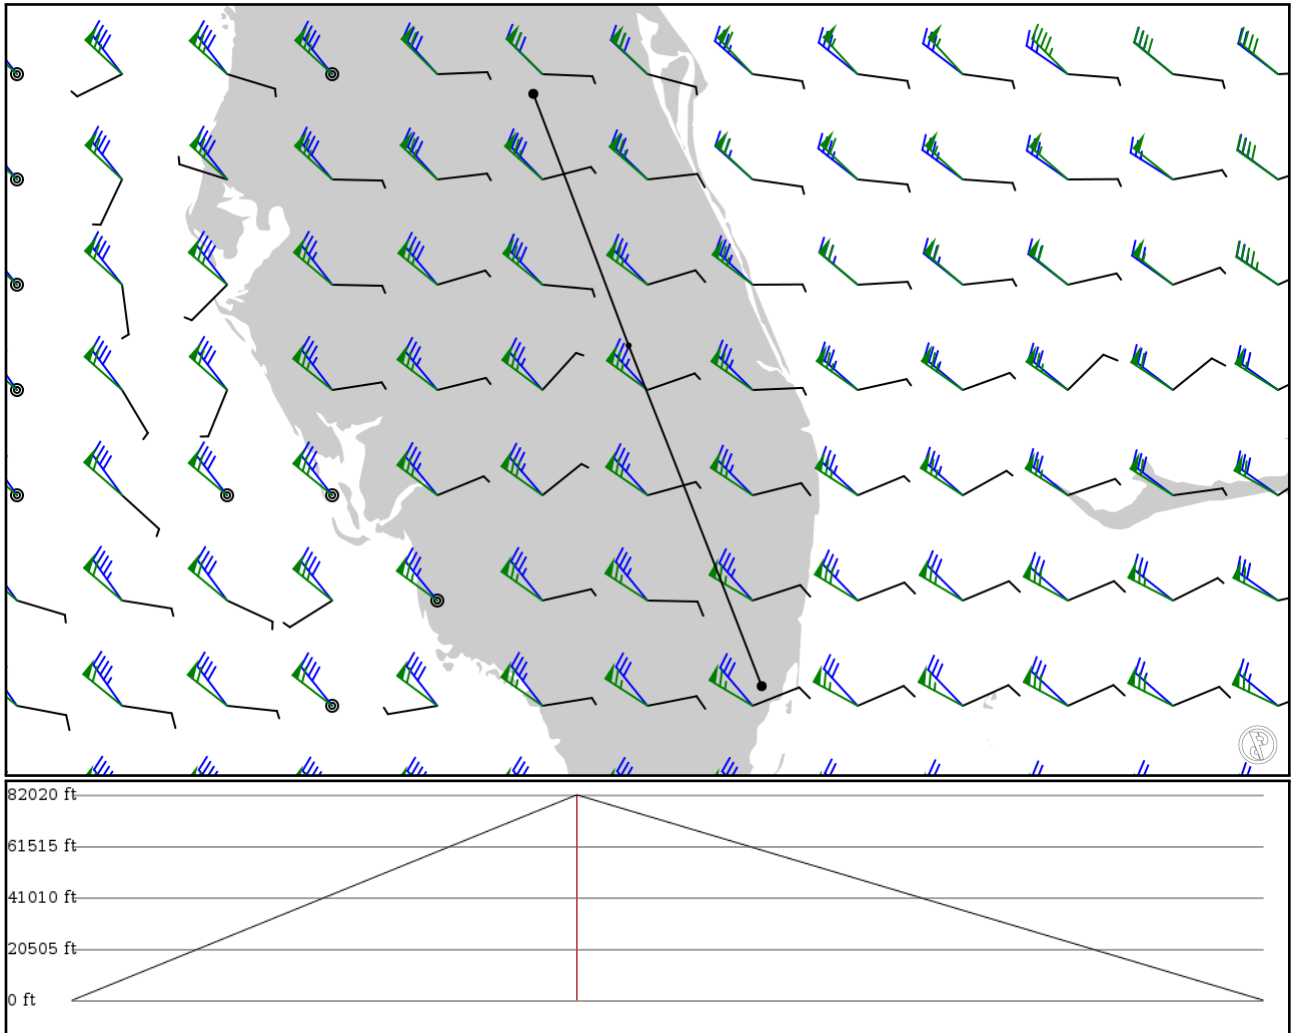

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 25000ft
- Cruise Speed: 240kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMCO	-	28.42920	0 ft	-	Orlando Intl
APT	-	-81.30680	0 m		
DIDDY	-	27.31060	25,000 ft	70	-
FIX	-	-80.88220	7,620 m		
KMIA	-	25.79620	0 ft	96	Miami Intl
APT	-	-80.28970	0 m		

## KMCO

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 96 ft / 29 m  
Location: 28.429200 -81.306800  
Magnetic Var: 7.001 W

## METAR

KMCO 051553Z VRB03KT 10SM SCT039 31/19 A2994 RMK AO2 SLP136 T03110194

## TAF

KMCO 051503Z 0515/0618 10006KT P6SM SCT040 FM052000 10011KT P6SM VCSH SCT050 SCT250 FM060200 12006KT P6SM SCT060

## Frequencies

REC - 120.52 MHz - D-ATIS	REC - 121.25 MHz - D-ATIS
CLD - 134.70 MHz - CLEARANCE DELIVERY	COM - 122.95 MHz - UNICOM
GND - 126.40 MHz - ORLANDO GROUND	GND - 121.80 MHz - ORLANDO GROUND
TWR - 124.30 MHz - ORLANDO TOWER	TWR - 118.45 MHz - ORLANDO TOWER
APP - 119.40 MHz - ORLANDO APPROACH	APP - 120.15 MHz - ORLANDO APPROACH
APP - 124.80 MHz - ORLANDO APPROACH	APP - 135.30 MHz - ORLANDO APPROACH
APP - 123.85 MHz - ORLANDO APPROACH	APP - 134.05 MHz - ORLANDO APPROACH
DEP - 119.40 MHz - ORLANDO DEPARTURE	DEP - 120.15 MHz - ORLANDO DEPARTURE
DEP - 124.80 MHz - ORLANDO DEPARTURE	DEP - 135.30 MHz - ORLANDO DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	151 ft	10,036 ft	179.47	CONCRETE	0 ft	404 ft
	46 m	3,059 m	186.47		0 m	123 m
35L	151 ft	10,036 ft	359.47	CONCRETE	0 ft	400 ft
	46 m	3,059 m	6.47		0 m	122 m
17L	151 ft	9,028 ft	179.48	CONCRETE	0 ft	400 ft
	46 m	2,752 m	186.48		0 m	122 m
35R	151 ft	9,028 ft	359.48	CONCRETE	0 ft	404 ft
	46 m	2,752 m	6.48		0 m	123 m
18L	200 ft	12,049 ft	179.46	CONCRETE	0 ft	400 ft
	61 m	3,673 m	186.46		0 m	122 m
36R	200 ft	12,049 ft	359.46	CONCRETE	0 ft	407 ft
	61 m	3,673 m	6.46		0 m	124 m
18R	200 ft	12,049 ft	179.45	ASPHALT	0 ft	909 ft
	61 m	3,673 m	186.46		0 m	277 m
36L	200 ft	12,049 ft	359.45	ASPHALT	0 ft	702 ft
	61 m	3,673 m	6.46		0 m	214 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IARK	110.95 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
17R	DME	IDIZ	111.75 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
18R	DME	ITFE	111.90 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
35L	DME	IDDO	110.50 MHz	18 nm	-	-	100 ft
				33 km	-		100 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35R	DME	ICER	111.15 MHz	18 nm	-	-	90 ft
				33 km	-		90 m
36R	DME	IOJP	110.70 MHz	18 nm	-	-	91 ft
				33 km	-		91 m
17L	LOC-ILS	IARK	110.95 MHz	18 nm	179.46	-	96 ft
				33 km	186.46		96 m
17R	LOC-ILS	IDIZ	111.75 MHz	18 nm	179.51	-	96 ft
				33 km	186.51		96 m
18R	LOC-ILS	ITFE	111.90 MHz	18 nm	179.50	-	96 ft
				33 km	186.50		96 m
35L	LOC-ILS	IDDO	110.50 MHz	18 nm	359.51	-	96 ft
				33 km	6.51		96 m
35R	LOC-ILS	ICER	111.15 MHz	18 nm	359.46	-	96 ft
				33 km	6.46		96 m
36R	LOC-ILS	IOJP	110.70 MHz	18 nm	359.50	-	96 ft
				33 km	6.50		96 m
17L	GS	IARK	110.95 MHz	10 nm	179.46	3.00	96 ft
				19 km	186.46		96 m
17R	GS	IDIZ	111.75 MHz	10 nm	179.51	3.00	96 ft
				19 km	186.51		96 m
18R	GS	ITFE	111.90 MHz	10 nm	179.50	3.00	96 ft
				19 km	186.50		96 m
35L	GS	IDDO	110.50 MHz	10 nm	359.51	3.00	96 ft
				19 km	6.51		96 m
35R	GS	ICER	111.15 MHz	10 nm	359.46	3.00	96 ft
				19 km	6.46		96 m
36R	GS	IOJP	110.70 MHz	10 nm	359.50	3.00	96 ft
				19 km	6.50		96 m

## KMIA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 11 ft / 3 m  
Location: 25.796200 -80.289700  
Magnetic Var: 7.280 W

## METAR

KMIA 051553Z 12009G16KT 10SM SCT032 32/23 A2990 RMK A02 SLP124 TCU DSNT E-SE T03170228

## TAF

TAF AMD KMIA 051455Z 0515/0618 12010KT P6SM VCSH SCT030 SCT050 SCT250 FM052200 11008KT P6SM FEW030 SCT250 FM060300

## Frequencies

REC - 119.15 MHz - D-ATIS  
COM - 123.00 MHz - UNICOM  
GND - 121.80 MHz - MIAMI GROUND  
TWR - 118.30 MHz - MIAMI TOWER  
APP - 120.50 MHz - MIAMI APPROACH  
APP - 125.75 MHz - MIAMI APPROACH  
DEP - 125.50 MHz - MIAMI DEPARTURE

REC - 133.67 MHz - D-ATIS  
CLD - 135.35 MHz - CLEARANCE DELIVERY  
GND - 127.50 MHz - MIAMI GROUND  
TWR - 123.90 MHz - MIAMI TOWER  
APP - 124.85 MHz - MIAMI APPROACH  
DEP - 119.45 MHz - MIAMI DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.65		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.67		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.66		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.67		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.66		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.67		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.89		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.90		289 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.88		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.88		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.64		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.64		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.88		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.88		4 m