


2024/05/08 1521Z

KMCO VALKA COLBY MPTO

1193.22 nm / 2209.84 km

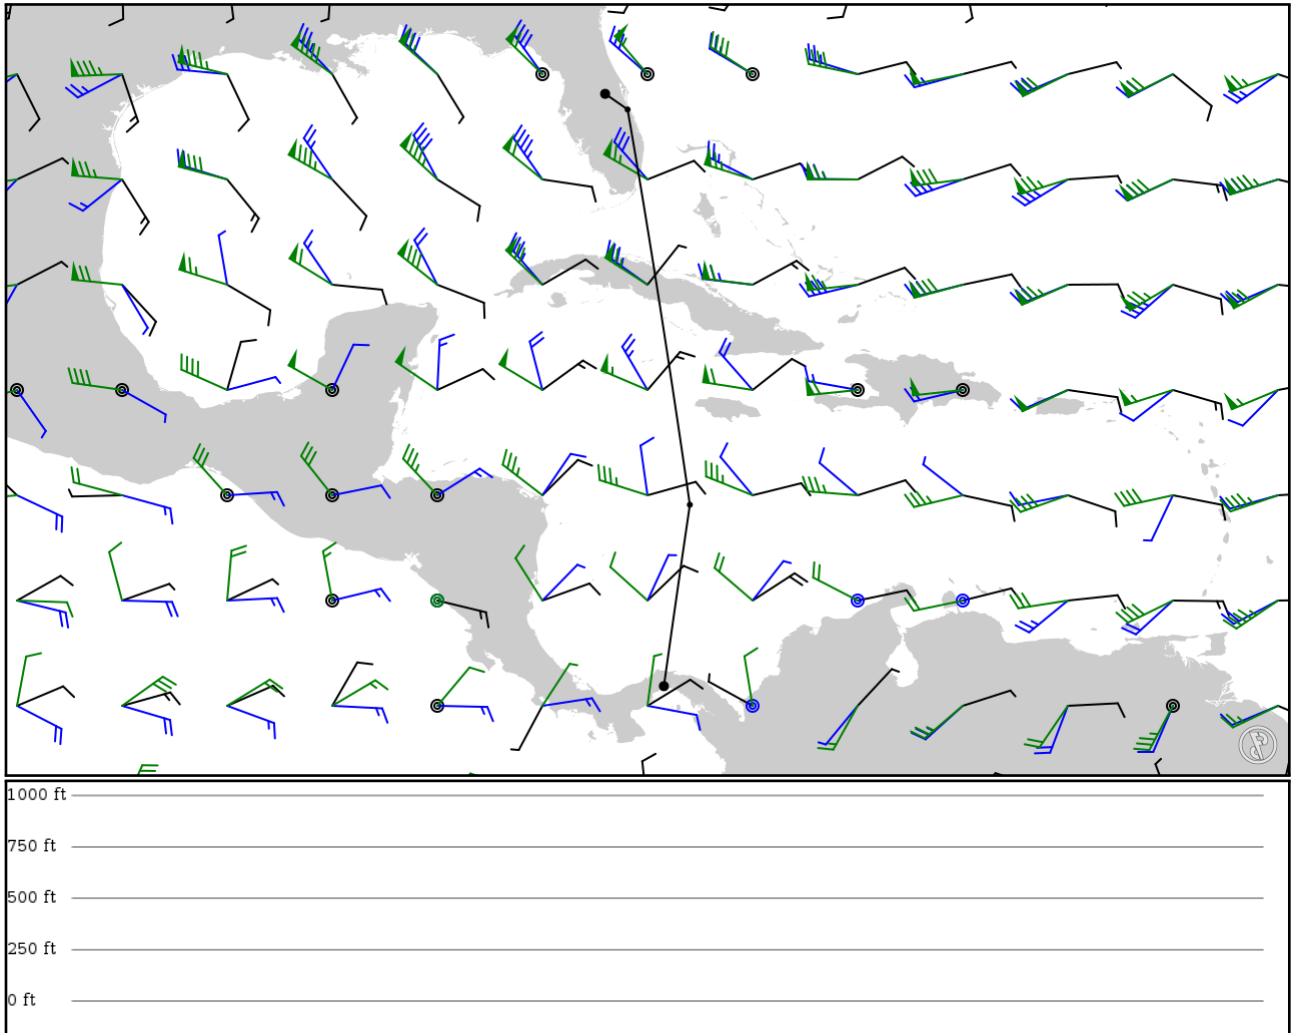

Notes

Requested: KMCO N0476F350 VALKA EBAYY Q97 TOVAR URSUS/N0473F360 R644 TASNO/N0472F370 UM221 COLBY MPTO
Unmatched points: N0476F350 EBAYY TOVAR URSUS/N0473F360 TASNO/N0472F370 UM221

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMCO	-	28.42920	0 ft	-	Orlando Intl
APT	-	-81.30680	0 m		
VALKA	-	27.91840	0 ft	49	-
FIX	-	-80.57140	0 m		
COLBY	-	15.00000	0 ft	784	-
FIX	-	-78.53330	0 m		
MPTO	-	9.07140	0 ft	359	Tocumen Intl
APT	-	-79.38350	0 m		

KMCO

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 96 ft / 29 m
Location: 28.429200 -81.306800
Magnetic Var: 6.994 W

METAR

KMCO 081453Z 24008KT 10SM FEW023 29/22 A2996 RMK A02 SLP142 T02940222 51006

TAF

KMCO 081515Z 0815/0918 19006KT P6SM FEW040 FM082100 15009KT P6SM VCSH SCT080 FM090300 18005KT P6SM FEW070 FM091400

Frequencies

REC - 120.52 MHz - D-ATIS
CLD - 134.70 MHz - CLEARANCE DELIVERY
GND - 126.40 MHz - ORLANDO GROUND
TWR - 124.30 MHz - ORLANDO TOWER
APP - 119.40 MHz - ORLANDO APPROACH
APP - 124.80 MHz - ORLANDO APPROACH
APP - 123.85 MHz - ORLANDO APPROACH
DEP - 119.40 MHz - ORLANDO DEPARTURE
DEP - 124.80 MHz - ORLANDO DEPARTURE

REC - 121.25 MHz - D-ATIS
COM - 122.95 MHz - UNICOM
GND - 121.80 MHz - ORLANDO GROUND
TWR - 118.45 MHz - ORLANDO TOWER
APP - 120.15 MHz - ORLANDO APPROACH
APP - 135.30 MHz - ORLANDO APPROACH
APP - 134.05 MHz - ORLANDO APPROACH
DEP - 120.15 MHz - ORLANDO DEPARTURE
DEP - 135.30 MHz - ORLANDO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	151 ft	10,036 ft	179.47	CONCRETE	0 ft	404 ft
	46 m	3,059 m	186.46		0 m	123 m
35L	151 ft	10,036 ft	359.47	CONCRETE	0 ft	400 ft
	46 m	3,059 m	6.46		0 m	122 m
17L	151 ft	9,028 ft	179.48	CONCRETE	0 ft	400 ft
	46 m	2,752 m	186.47		0 m	122 m
35R	151 ft	9,028 ft	359.48	CONCRETE	0 ft	404 ft
	46 m	2,752 m	6.47		0 m	123 m
18L	200 ft	12,049 ft	179.46	CONCRETE	0 ft	400 ft
	61 m	3,673 m	186.45		0 m	122 m
36R	200 ft	12,049 ft	359.46	CONCRETE	0 ft	407 ft
	61 m	3,673 m	6.45		0 m	124 m
18R	200 ft	12,049 ft	179.45	ASPHALT	0 ft	909 ft
	61 m	3,673 m	186.45		0 m	277 m
36L	200 ft	12,049 ft	359.45	ASPHALT	0 ft	702 ft
	61 m	3,673 m	6.45		0 m	214 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IARK	110.95 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
17R	DME	IDIZ	111.75 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
18R	DME	ITFE	111.90 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
35L	DME	IDDO	110.50 MHz	18 nm	-	-	100 ft
				33 km	-		100 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35R	DME	ICER	111.15 MHz	18 nm	-	-	90 ft
				33 km	-		90 m
36R	DME	IOJP	110.70 MHz	18 nm	-	-	91 ft
				33 km	-		91 m
17L	LOC-ILS	IARK	110.95 MHz	18 nm	179.46	-	96 ft
				33 km	186.45		96 m
17R	LOC-ILS	IDIZ	111.75 MHz	18 nm	179.51	-	96 ft
				33 km	186.50		96 m
18R	LOC-ILS	ITFE	111.90 MHz	18 nm	179.50	-	96 ft
				33 km	186.49		96 m
35L	LOC-ILS	IDDO	110.50 MHz	18 nm	359.51	-	96 ft
				33 km	6.50		96 m
35R	LOC-ILS	ICER	111.15 MHz	18 nm	359.46	-	96 ft
				33 km	6.45		96 m
36R	LOC-ILS	IOJP	110.70 MHz	18 nm	359.50	-	96 ft
				33 km	6.49		96 m
17L	GS	IARK	110.95 MHz	10 nm	179.46	3.00	96 ft
				19 km	186.45		96 m
17R	GS	IDIZ	111.75 MHz	10 nm	179.51	3.00	96 ft
				19 km	186.50		96 m
18R	GS	ITFE	111.90 MHz	10 nm	179.50	3.00	96 ft
				19 km	186.49		96 m
35L	GS	IDDO	110.50 MHz	10 nm	359.51	3.00	96 ft
				19 km	6.50		96 m
35R	GS	ICER	111.15 MHz	10 nm	359.46	3.00	96 ft
				19 km	6.45		96 m
36R	GS	IOJP	110.70 MHz	10 nm	359.50	3.00	96 ft
				19 km	6.49		96 m

MPTO

Region: PANAMA

Timezone: AMERICA/PANAMA

Runways: 2

Elevation: 134 ft / 41 m

Location: 9.071400 -79.383500

Magnetic Var: 5.452 W

METAR

MPTO 081500Z 17005KT 8000 FEW008 SCT016 BKN080 29/25 Q1011 NOSIG

TAF

TAF MPTO 081110Z 0812/0918 29006KT 9999 SCT018 SCT090 TEMPO 0816/0820 18008KT 5000 TSRA SCT015CB BKN080 PROB40 0820/0824 18008KT 5000 TSRA SCT015CB BKN080

Frequencies

REC - 127.70 MHz - ATIS

GND - 121.90 MHz - TOCUMEN GROUND

CLD - 129.80 MHz - CLEARANCE DELIVERY

APP - 123.30 MHz - PANAMA APPROACH

APP - 119.20 MHz - PANAMA APPROACH

TWR - 118.10 MHz - TOCUMEN TOWER

GND - 112.05 MHz - TOCUMEN GROUND

APP - 121.20 MHz - PANAMA APPROACH

APP - 119.70 MHz - PANAMA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03R	148 ft	10,049 ft	29.33	CONCRETE	0 ft	0 ft
	45 m	3,063 m	34.78		0 m	0 m
21L	148 ft	10,049 ft	209.33	CONCRETE	0 ft	0 ft
	45 m	3,063 m	214.78		0 m	0 m
03L	148 ft	8,832 ft	30.67	ASPHALT	814 ft	0 ft
	45 m	2,692 m	36.12		248 m	0 m
21R	148 ft	8,832 ft	210.67	ASPHALT	0 ft	0 ft
	45 m	2,692 m	216.12		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03R	DME	INAT	110.70 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
03R	LOC-ILS	INAT	110.70 MHz	18 nm	29.33	-	134 ft
				33 km	34.78		134 m
03R	GS	INAT	110.70 MHz	10 nm	29.33	3.00	134 ft
				19 km	34.78		134 m