


KMIA
Miami Intl

KDTW
Detroit Metro International Airport

2024/05/17 0359Z

KMIA LLNCH **J113** CRG **J53** SPA **J83** APE **V45** KIRBY KDTW

1006.04 nm / 1863.19 km

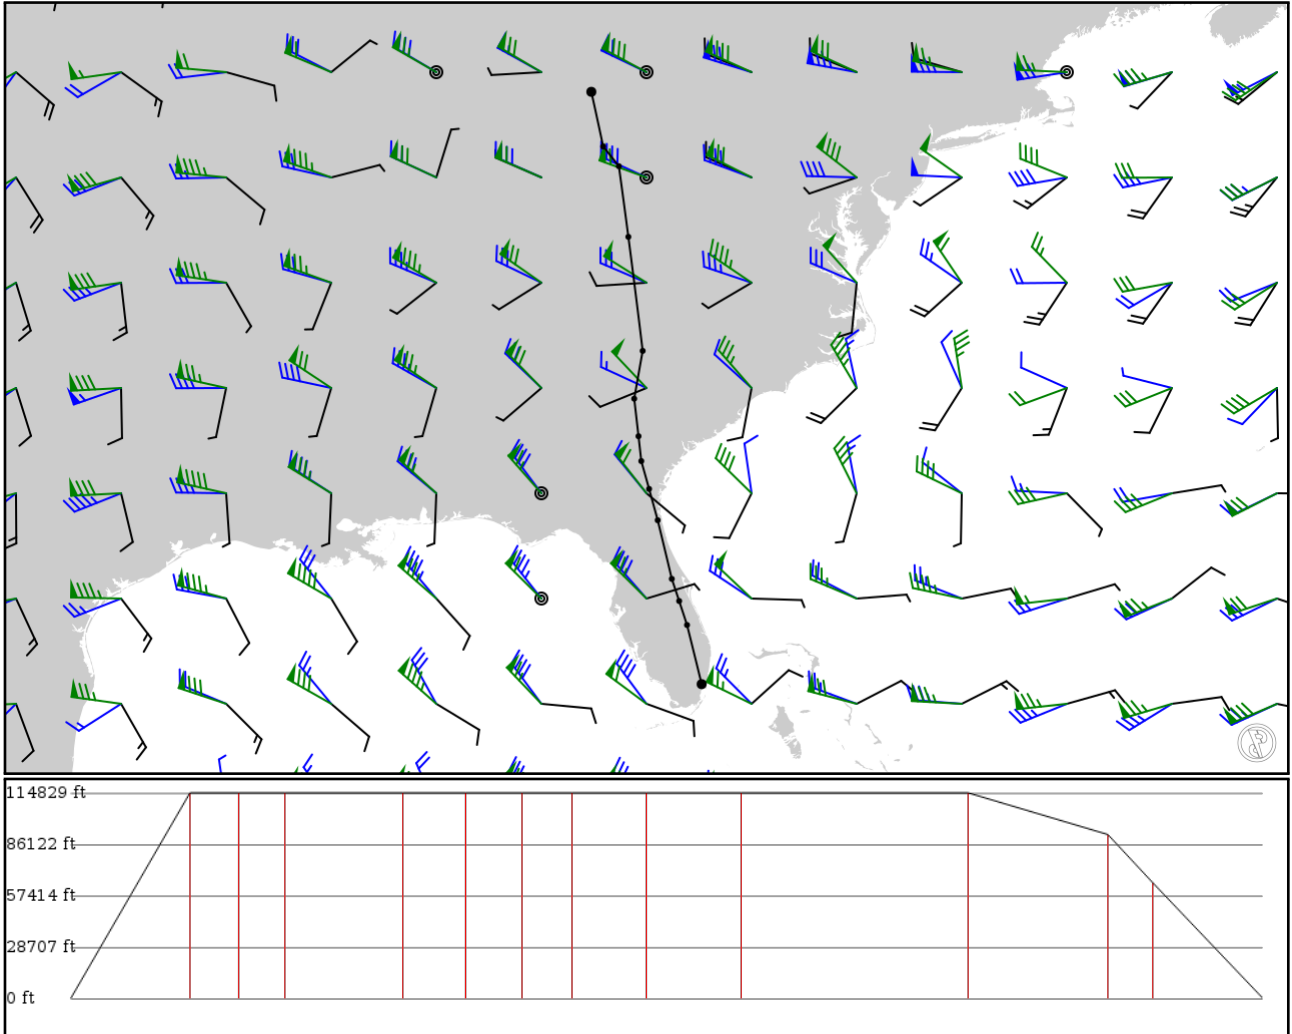

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMIA APT	-	25.79620 -80.28970	0 ft 0 m	-	Miami Intl
LLNCH FIX	-	27.43550 -80.69570	35,000 ft 10,668 m	100	-
DEARY FIX	J113 AWY-HI	28.10070 -80.91430	35,000 ft 10,668 m	41	-
DRUDJ FIX	J113 AWY-HI	28.71380 -81.11830	35,000 ft 10,668 m	38	-
CRG VOR	J113 AWY-HI	30.33890 -81.50990	35,000 ft 10,668 m	99	CRAIG (JACKSONVILLE)
NOWAY FIX	J53 AWY-HI	31.20660 -81.74900	35,000 ft 10,668 m	53	-
DUNKN FIX	J53 AWY-HI	31.97830 -81.96540	35,000 ft 10,668 m	47	-
GRADY FIX	J53 AWY-HI	32.66780 -82.04290	35,000 ft 10,668 m	41	-
IRQ VOR	J53 AWY-HI	33.70740 -82.16210	35,000 ft 10,668 m	62	COLLIERS
SPA VOR	J53 AWY-HI	35.03360 -81.92700	35,000 ft 10,668 m	80	SPARTANBURG
SPAYD FIX	J83 AWY-HI	38.19350 -82.32460	35,000 ft 10,668 m	190	-
APE VOR	J83 AWY-HI	40.15110 -82.58830	27,900 ft 8,504 m	118	APPLETON
KIRBY FIX	V45 AWY-LO	40.69820 -83.02430	19,700 ft 6,005 m	38	-
KDTW APT	-	42.21220 -83.35260	0 ft 0 m	92	Detroit Metro International Airport

KMIA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 11 ft / 3 m
Location: 25.796200 -80.289700
Magnetic Var: 7.275 W

METAR

KMIA 170253Z 24005KT 10SM FEW250 28/24 A2989 RMK AO2 SLP123 T02830239 51012 \$

TAF

TAF AMD KMIA 170249Z 1703/1806 VRB04KT P6SM SCT030 SCT250 FM171600 22007KT P6SM SCT030 BKN060 FM171800 16010KT P6SM

Frequencies

REC - 119.15 MHz - D-ATIS
COM - 123.00 MHz - UNICOM
GND - 121.80 MHz - MIAMI GROUND
TWR - 118.30 MHz - MIAMI TOWER
APP - 120.50 MHz - MIAMI APPROACH
APP - 125.75 MHz - MIAMI APPROACH
DEP - 125.50 MHz - MIAMI DEPARTURE

REC - 133.67 MHz - D-ATIS
CLD - 135.35 MHz - CLEARANCE DELIVERY
GND - 127.50 MHz - MIAMI GROUND
TWR - 123.90 MHz - MIAMI TOWER
APP - 124.85 MHz - MIAMI APPROACH
DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.65		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.66		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.65		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.67		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.66		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.67		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.89		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.90		289 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.88		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.88		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.64		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.64		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.88		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.88		4 m

KDTW

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 6

Elevation: 645 ft / 197 m
Location: 42.212200 -83.352600
Magnetic Var: 7.491 W

METAR

KDTW 170253Z 18003KT 10SM BKN090 OVC120 18/12 A2983 RMK A02 SLP099 T01780122 55002

TAF

KDTW 170256Z 1703/1806 15006KT P6SM SCT070 OVC100 FM170800 14005KT P6SM -SHRA OVC045 FM171000 15005KT 5SM -SHRA B

Frequencies

REC - 118.12 MHz - ATIS	REC - 133.67 MHz - ATIS
COM - 122.95 MHz - UNICOM	CLD - 120.65 MHz - CLEARANCE DELIVERY
GND - 119.25 MHz - METRO GROUND	GND - 119.45 MHz - METRO GROUND
GND - 121.80 MHz - METRO GROUND	GND - 132.72 MHz - METRO GROUND
TWR - 118.40 MHz - METRO TOWER	TWR - 128.12 MHz - METRO TOWER
TWR - 128.75 MHz - METRO TOWER	TWR - 135.00 MHz - METRO TOWER
APP - 124.05 MHz - DETROIT APPROACH	APP - 125.15 MHz - DETROIT APPROACH
DEP - 118.95 MHz - DETROIT DEPARTURE	DEP - 125.52 MHz - DETROIT DEPARTURE
DEP - 132.02 MHz - DETROIT DEPARTURE	DEP - 134.30 MHz - DETROIT DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	200 ft	12,011 ft	28.61	CONCRETE	512 ft	397 ft
	61 m	3,661 m	36.10		156 m	121 m
22L	200 ft	12,011 ft	208.63	CONCRETE	0 ft	433 ft
	61 m	3,661 m	216.12		0 m	132 m
03R	151 ft	10,005 ft	28.61	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.10		0 m	122 m
21L	151 ft	10,005 ft	208.62	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.11		0 m	122 m
04L	151 ft	10,003 ft	28.58	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.07		0 m	122 m
22R	151 ft	10,003 ft	208.59	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.08		0 m	122 m
09L	151 ft	8,687 ft	88.70	CONCRETE	0 ft	400 ft
	46 m	2,648 m	96.19		0 m	122 m
27R	151 ft	8,687 ft	268.72	CONCRETE	0 ft	400 ft
	46 m	2,648 m	276.22		0 m	122 m
03L	150 ft	8,505 ft	28.62	CONCRETE	0 ft	400 ft
	46 m	2,592 m	36.12		0 m	122 m
21R	150 ft	8,505 ft	208.63	CONCRETE	0 ft	397 ft
	46 m	2,592 m	216.13		0 m	121 m
09R	151 ft	8,480 ft	88.71	CONCRETE	0 ft	400 ft
	46 m	2,585 m	96.20		0 m	122 m
27L	151 ft	8,480 ft	268.73	CONCRETE	0 ft	400 ft
	46 m	2,585 m	276.22		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
--------	------	-------	-----------	-------	-------------------------	-------	-----------

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHJT	111.95 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
04R	DME	IDTW	110.70 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
22L	DME	IDWC	110.70 MHz	18 nm	-	-	646 ft
				33 km	-		646 m
03R	LOC-ILS	IHUU	111.50 MHz	18 nm	28.62	-	645 ft
				33 km	36.11		645 m
04L	LOC-ILS	IHJT	111.95 MHz	18 nm	28.59	-	645 ft
				33 km	36.08		645 m
04R	LOC-ILS	IDTW	110.70 MHz	18 nm	28.63	-	645 ft
				33 km	36.12		645 m
21L	LOC-ILS	IEJR	111.50 MHz	18 nm	208.62	-	645 ft
				33 km	216.11		645 m
22L	LOC-ILS	IDWC	110.70 MHz	18 nm	208.63	-	645 ft
				33 km	216.12		645 m
22R	LOC-ILS	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
27L	LOC-ILS	IEPA	110.15 MHz	18 nm	268.72	-	645 ft
				33 km	276.21		645 m
27R	LOC-ILS	IDMI	108.50 MHz	18 nm	268.71	-	645 ft
				33 km	276.20		645 m
22R	LOC-LOC	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
03R	GS	IHUU	111.50 MHz	10 nm	28.62	3.00	645 ft
				19 km	36.11		645 m
04L	GS	IHJT	111.95 MHz	10 nm	28.59	3.00	645 ft
				19 km	36.08		645 m
04R	GS	IDTW	110.70 MHz	10 nm	28.63	3.00	645 ft
				19 km	36.12		645 m
21L	GS	IEJR	111.50 MHz	10 nm	208.62	3.00	645 ft
				19 km	216.11		645 m
22L	GS	IDWC	110.70 MHz	10 nm	208.63	2.85	645 ft
				19 km	216.12		645 m
22R	GS	IJKI	111.95 MHz	10 nm	208.59	3.00	645 ft
				19 km	216.08		645 m
27L	GS	IEPA	110.15 MHz	10 nm	268.72	3.00	645 ft
				19 km	276.21		645 m
27R	GS	IDMI	108.50 MHz	10 nm	268.71	3.00	645 ft
				19 km	276.20		645 m