

# EETN

Lennart Meri Tallinn


# EFHK

Helsinki Vantaa Intl

2024/05/11 2223Z

EETN SORPA EFHK

54.60 nm / 101.12 km

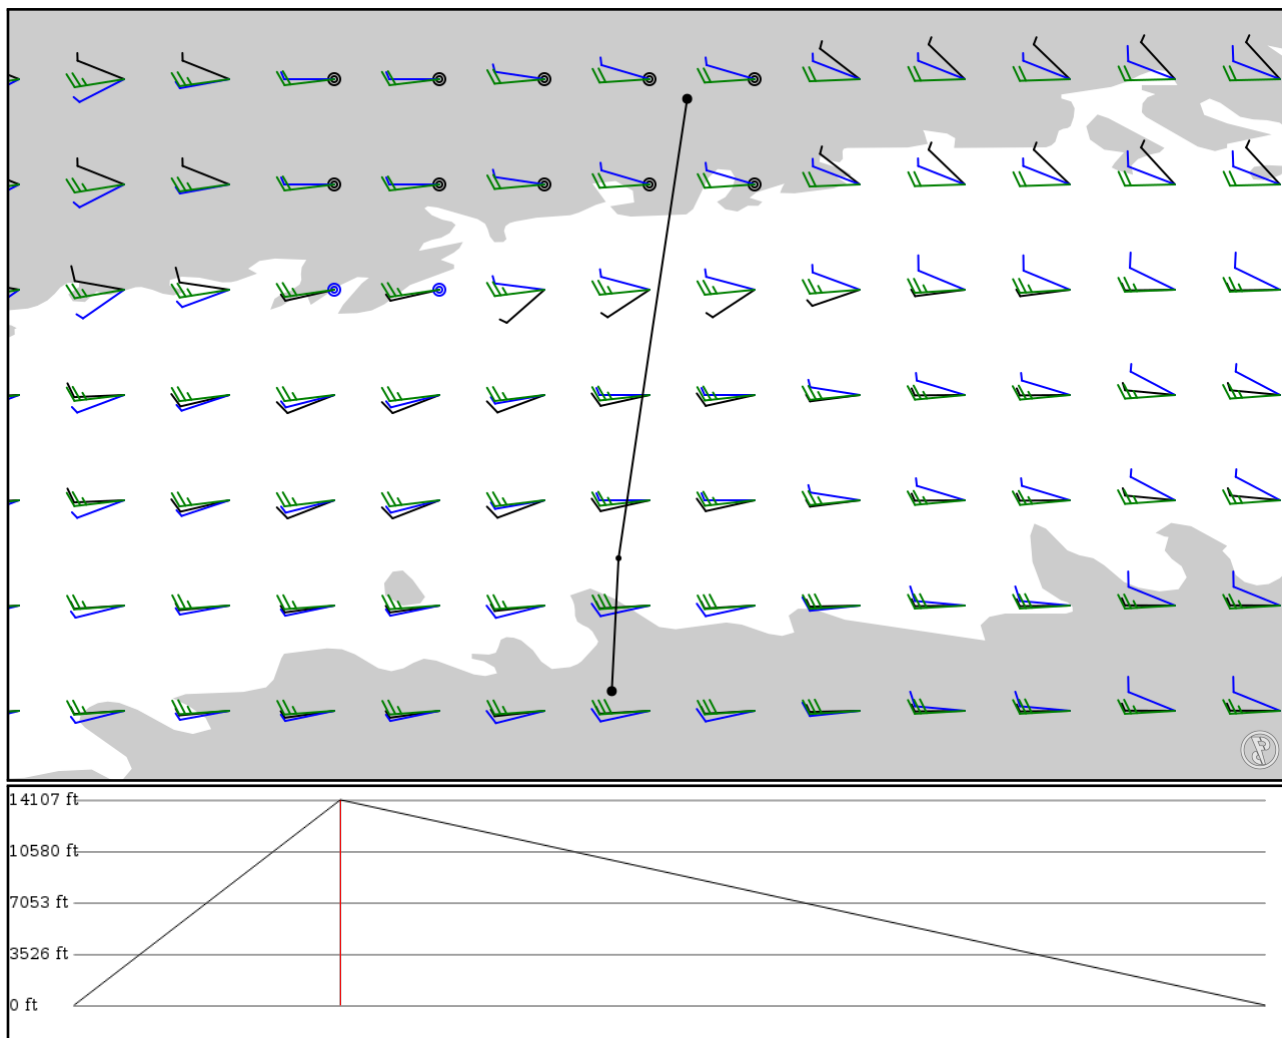

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: no
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EETN	-	59.41330	0 ft	-	Lennart Meri Tallinn
APT	-	24.83650	0 m		
SORPA	-	59.61690	4,300 ft	12	-
FIX	-	24.84690	1,311 m		
EFHK	-	60.32040	0 ft	42	Helsinki Vantaa Intl
APT	-	24.95220	0 m		

## EETN

Region: ESTONIA  
Timezone: EUROPE/TALLINN  
Runways: 1

Elevation: 128 ft / 39 m  
Location: 59.413300 24.836500  
Magnetic Var: 9.619 E

## METAR

EETN 112150Z 31007KT CAVOK 09/M00 Q1021 NOSIG

## TAF

TAF TAF EETN 111730Z 1118/1218 29012KT CAVOK BECMG 1121/1123 35007KT BECMG 1215/1217 BKN025

## Frequencies

REC - 124.87 MHz - ATIS  
TWR - 135.90 MHz - TALLIN TOWER  
APP - 125.40 MHz - TALLINN RADAR

REC - 464.50 MHz - ATIS  
APP - 127.90 MHz - TALLINN RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	148 ft	11,379 ft	90.27	ASPHALT	774 ft	810 ft
	45 m	3,468 m	80.65		236 m	247 m
26	148 ft	11,379 ft	270.33	ASPHALT	0 ft	203 ft
	45 m	3,468 m	260.71		0 m	62 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	LOC-ILS	IIB	108.30 MHz	18 nm	90.30	-	128 ft
				33 km	80.68		128 m
26	LOC-ILS	ILK	109.30 MHz	18 nm	270.30	-	128 ft
				33 km	260.68		128 m
08	GS	IIB	108.30 MHz	10 nm	90.30	3.00	128 ft
				19 km	80.68		128 m
26	GS	ILK	109.30 MHz	10 nm	270.30	3.00	128 ft
				19 km	260.68		128 m

## EFHK

Region: FINLAND

Timezone: EUROPE/HELSINKI

Runways: 3

Elevation: 180 ft / 55 m

Location: 60.320400 24.952200

Magnetic Var: 9.962 E

## METAR

EFHK 112150Z 33006KT CAVOK 04/M04 Q1021 NOSIG

## TAF

TAF TAF EFHK 112023Z 1121/1221 32004KT CAVOK PROB30 1214/1218 22010KT

## Frequencies

REC - 135.07 MHz - ATIS ARRIVAL

TWR - 119.70 MHz - HELSINKI TOWER

TWR - 118.60 MHz - HELSINKI TOWER

GND - 118.12 MHz - HELSINKI GROUND

APP - 119.10 MHz - HELSINKI RADAR APPROACH

APP - 119.70 MHz - HELSINKI RADAR APPROACH

APP - 119.90 MHz - HELSINKI ARRIVAL

REC - 114.20 MHz - ATIS DEPARTURE

TWR - 118.85 MHz - HELSINKI TOWER

GND - 121.80 MHz - HELSINKI GROUND

GND - 121.65 MHz - HELSINKI RAMP/TAXI

APP - 129.85 MHz - HELSINKI RADAR APPROACH

APP - 124.32 MHz - HELSINKI ARRIVAL

GND - 127.02 MHz - HELSINKI DE-ICING

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.52		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.56		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.46		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.50		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.10		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.12		0 m	60 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.49		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.55		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.12		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.55		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.49		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.49		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.55		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.12		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.55		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.49		180 m