

KIAD

Washington Dulles Intl


KJFK

John F. Kennedy Intl

2024/05/07 0136Z

KIAD STOEN KJFK

198.34 nm / 367.32 km

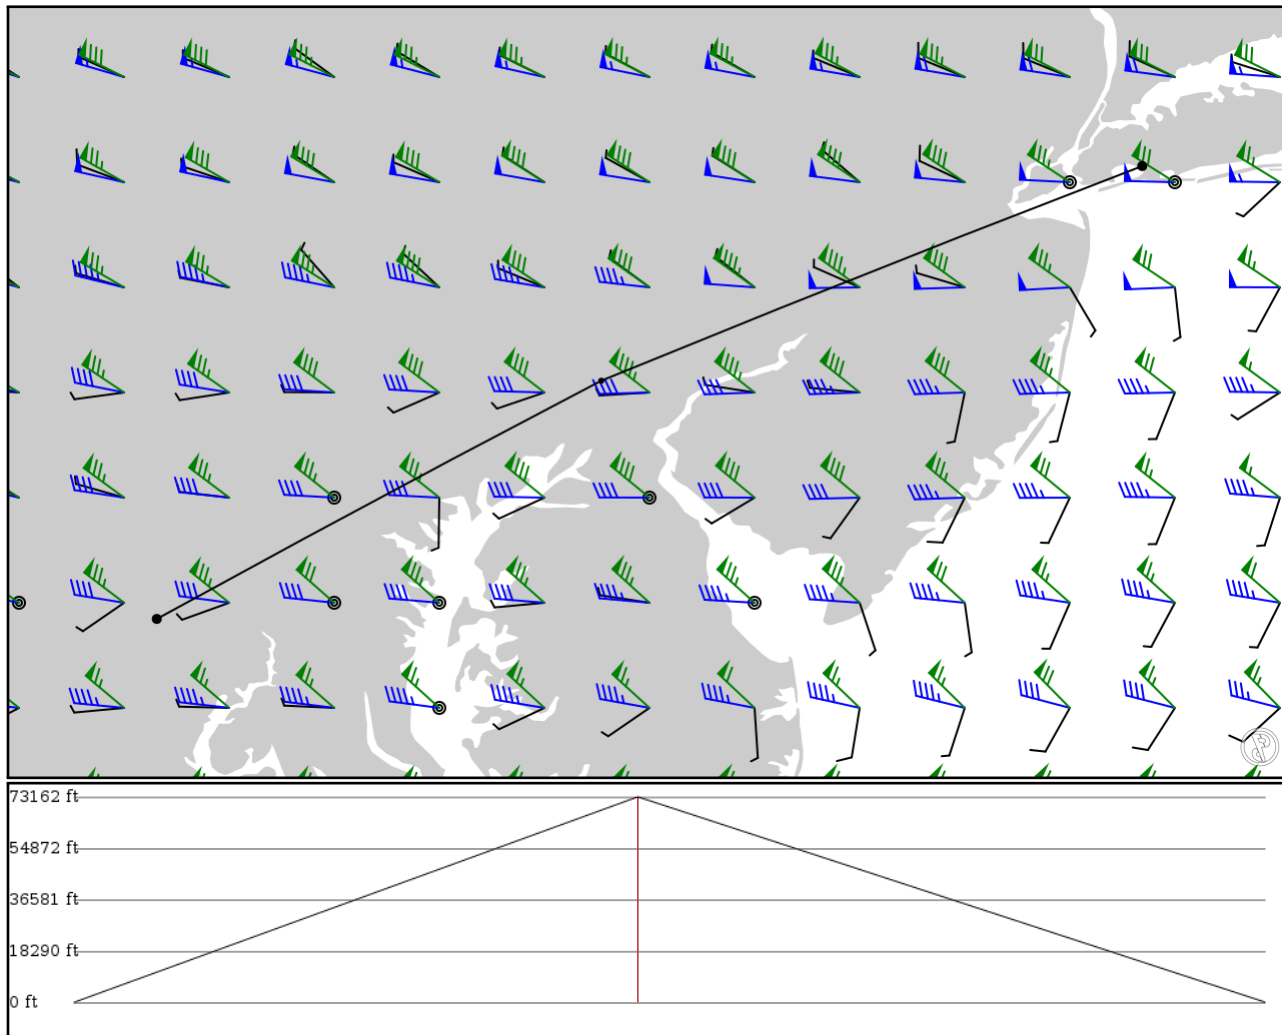

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KIAD APT	-	38.94770 -77.46090	0 ft 0 m	-	Washington Dulles Intl
STOEN FIX	-	39.83820 -75.79860	22,300 ft 6,797 m	93	-
KJFK APT	-	40.64010 -73.77650	0 ft 0 m	104	John F. Kennedy Intl

KIAD

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 312 ft / 95 m
Location: 38.947700 -77.460900
Magnetic Var: 10.663 W

METAR

KIAD 070052Z 14003KT 10SM -RA FEW060 SCT090 OVC110 21/18 A2990 RMK A02 RAB22 SLP123 P0000 T02110183

TAF

KIAD 070106Z 0701/0806 14003KT 6SM -SHRA SCT060 OVC110 FM070300 14003KT 5SM BR OVC015 FM070900 00000KT 2SM BR OVC015

Frequencies

COM - 122.95 MHz - UNICOM	REC - 134.85 MHz - D-ATIS
CLD - 135.70 MHz - CLEARANCE DELIVERY	GND - 121.62 MHz - DULLES GROUND
GND - 121.90 MHz - DULLES GROUND	TWR - 120.10 MHz - DULLES TOWER
TWR - 120.25 MHz - DULLES TOWER	TWR - 134.42 MHz - DULLES TOWER
APP - 120.45 MHz - POTOMAC APPROACH	APP - 126.10 MHz - POTOMAC APPROACH
APP - 128.52 MHz - POTOMAC APPROACH	DEP - 126.65 MHz - POTOMAC DEPARTURE
DEP - 125.05 MHz - POTOMAC DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	151 ft	9,408 ft	0.64	CONCRETE	0 ft	404 ft
	46 m	2,868 m	11.30		0 m	123 m
19R	151 ft	9,408 ft	180.64	CONCRETE	0 ft	404 ft
	46 m	2,868 m	191.30		0 m	123 m
01C	151 ft	11,510 ft	0.65	CONCRETE	0 ft	407 ft
	46 m	3,508 m	11.31		0 m	124 m
19C	151 ft	11,510 ft	180.65	CONCRETE	0 ft	43 ft
	46 m	3,508 m	191.31		0 m	13 m
01R	151 ft	11,510 ft	0.66	CONCRETE	0 ft	43 ft
	46 m	3,508 m	11.33		0 m	13 m
19L	151 ft	11,510 ft	180.66	CONCRETE	0 ft	387 ft
	46 m	3,508 m	191.33		0 m	118 m
12	151 ft	10,513 ft	110.71	CONCRETE	0 ft	20 ft
	46 m	3,204 m	121.37		0 m	6 m
30	151 ft	10,513 ft	290.73	CONCRETE	0 ft	387 ft
	46 m	3,204 m	301.39		0 m	118 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01R	DME	IIAD	110.10 MHz	18 nm	-	-	314 ft
				33 km	-		314 m
19L	DME	ISGC	110.10 MHz	18 nm	-	-	314 ft
				33 km	-		314 m
19R	DME	IISU	110.75 MHz	18 nm	-	-	313 ft
				33 km	-		313 m
01C	LOC-ILS	IOSZ	111.30 MHz	18 nm	0.65	-	312 ft
				33 km	11.31		312 m
01R	LOC-ILS	IIAD	110.10 MHz	18 nm	0.67	-	312 ft
				33 km	11.33		312 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	IAJU	109.30 MHz	18 nm	110.74	-	312 ft
				33 km	121.40		312 m
19C	LOC-ILS	IDLX	111.30 MHz	18 nm	180.65	-	312 ft
				33 km	191.31		312 m
19L	LOC-ILS	ISGC	110.10 MHz	18 nm	180.67	-	312 ft
				33 km	191.33		312 m
19R	LOC-ILS	IISU	110.75 MHz	18 nm	180.58	-	312 ft
				33 km	191.24		312 m
01L	LOC-ILS	IOIU	110.75 MHz	18 nm	0.58	-	312 ft
				33 km	11.24		312 m
01C	GS	IOSZ	111.30 MHz	10 nm	0.65	3.00	312 ft
				19 km	11.31		312 m
01R	GS	IIAD	110.10 MHz	10 nm	0.67	3.00	312 ft
				19 km	11.33		312 m
12	GS	IAJU	109.30 MHz	10 nm	110.74	3.00	312 ft
				19 km	121.40		312 m
19C	GS	IDLX	111.30 MHz	10 nm	180.65	3.00	312 ft
				19 km	191.31		312 m
19L	GS	ISGC	110.10 MHz	10 nm	180.67	3.00	312 ft
				19 km	191.33		312 m
19R	GS	IISU	110.75 MHz	10 nm	180.58	3.00	312 ft
				19 km	191.24		312 m
01L	GS	IOIU	110.75 MHz	10 nm	0.58	3.00	312 ft
				19 km	11.24		312 m

KJFK

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 12 ft / 4 m
Location: 40.640100 -73.776500
Magnetic Var: 12.820 W

METAR

KJFK 070108Z 21007KT 10SM FEW004 FEW140 BKN230 16/15 A2988 RMK A02 T01560150

TAF

TAF KJFK 062323Z 0700/0806 19004KT P6SM FEW025 BKN035 TEMPO 0701/0704 4SM BR BKN025 FM070400 26004KT P6SM FEW020 B

Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.49		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.50		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
31R	DME	IRTH	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm	30.68	-	12 ft
				33 km	43.50		12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm	30.67	-	12 ft
				33 km	43.49		12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm	120.87	-	12 ft
				33 km	133.69		12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm	210.67	-	12 ft
				33 km	223.49		12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm	210.68	-	12 ft
				33 km	223.50		12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm	300.84	-	12 ft
				33 km	313.66		12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm	300.87	-	12 ft
				33 km	313.69		12 m
04L	GS	IHIQ	110.90 MHz	10 nm	30.68	3.00	12 ft
				19 km	43.50		12 m
04R	GS	IJFK	109.50 MHz	10 nm	30.67	3.00	12 ft
				19 km	43.49		12 m
13L	GS	ITLK	111.50 MHz	10 nm	120.87	3.00	12 ft
				19 km	133.69		12 m
22L	GS	IIWY	110.90 MHz	10 nm	210.67	3.00	12 ft
				19 km	223.49		12 m
22R	GS	IJOC	109.50 MHz	10 nm	210.68	3.00	12 ft
				19 km	223.50		12 m
31L	GS	IMOH	111.35 MHz	10 nm	300.84	3.00	12 ft
				19 km	313.66		12 m
31R	GS	IRTH	111.50 MHz	10 nm	300.87	3.00	12 ft
				19 km	313.69		12 m