

KDTW

Detroit Metro International Airport


KLGA

La Guardia

2024/05/16 0551Z

KDTW KEEHO **J190** SLT **V188** FQM **J584** HAYED KLGA

435.65 nm / 806.83 km

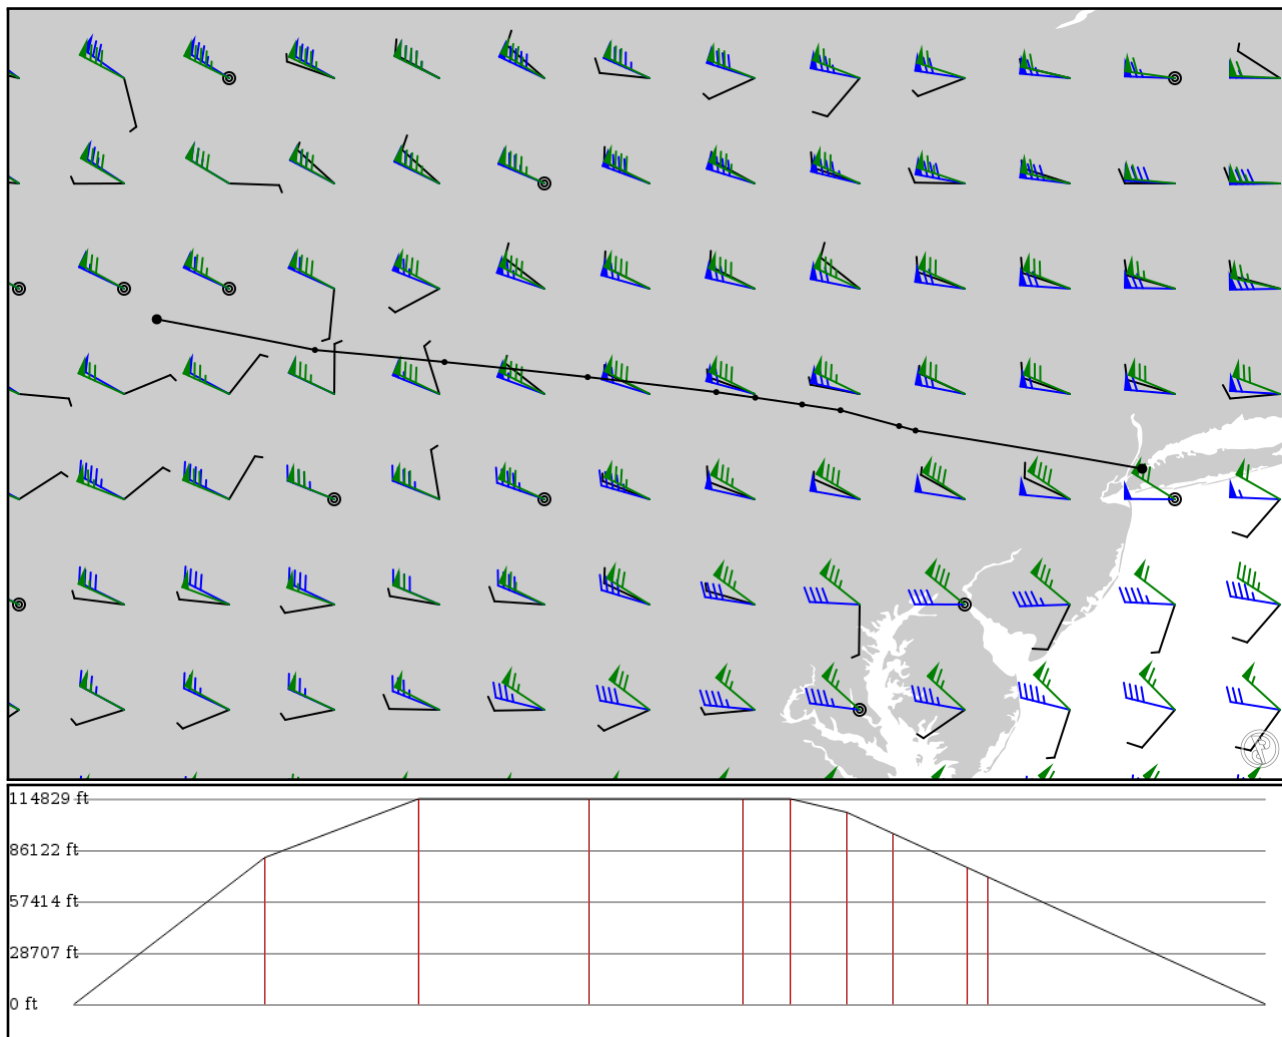

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KDTW	-	42.21220	0 ft	-		Detroit Metro International Airport
APT	-	-83.35260	0 m			
KEEHO	-	41.91760	25,000 ft	70	-	
FIX	-	-81.83100	7,620 m			
DORET	J190	41.80160	35,000 ft	56	-	
FIX	AWY-HI	-80.58460	10,668 m			
ZORBO	J190	41.65720	35,000 ft	62	-	
FIX	AWY-HI	-79.20750	10,668 m			
SLT	J190	41.51280	35,000 ft	56		SLATE RUN
VOR	AWY-HI	-77.97010	10,668 m			
BLAZE	V188	41.45950	35,000 ft	17	-	
FIX	AWY-LO	-77.59490	10,668 m			
TRUER	V188	41.39380	32,700 ft	20	-	
FIX	AWY-LO	-77.14430	9,967 m			
FQM	V188	41.33860	29,100 ft	16		WILLIAMSPORT
VOR	AWY-LO	-76.77490	8,870 m			
MEGSS	J584	41.18700	23,300 ft	27	-	
FIX	AWY-HI	-76.21140	7,102 m			
HAYED	J584	41.14390	21,700 ft	7	-	
FIX	AWY-HI	-76.05350	6,614 m			
KLGA	-	40.77720	0 ft	101		La Guardia
APT	-	-73.87260	0 m			

KDTW

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 6

Elevation: 645 ft / 197 m
Location: 42.212200 -83.352600
Magnetic Var: 7.491 W

METAR

KDTW 160453Z 02005KT 10SM FEW070 FEW250 14/07 A2988 RMK A02 SLP116 T01390072 402440122

TAF

TAF AMD KDTW 160257Z 1603/1706 03008KT P6SM SCT250 FM160800 02005KT P6SM SCT045 BKN200 TEMPO 1609/1613 6SM HZ SCT0

Frequencies

REC - 118.12 MHz - ATIS	REC - 133.67 MHz - ATIS
COM - 122.95 MHz - UNICOM	CLD - 120.65 MHz - CLEARANCE DELIVERY
GND - 119.25 MHz - METRO GROUND	GND - 119.45 MHz - METRO GROUND
GND - 121.80 MHz - METRO GROUND	GND - 132.72 MHz - METRO GROUND
TWR - 118.40 MHz - METRO TOWER	TWR - 128.12 MHz - METRO TOWER
TWR - 128.75 MHz - METRO TOWER	TWR - 135.00 MHz - METRO TOWER
APP - 124.05 MHz - DETROIT APPROACH	APP - 125.15 MHz - DETROIT APPROACH
DEP - 118.95 MHz - DETROIT DEPARTURE	DEP - 125.52 MHz - DETROIT DEPARTURE
DEP - 132.02 MHz - DETROIT DEPARTURE	DEP - 134.30 MHz - DETROIT DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	200 ft	12,011 ft	28.61	CONCRETE	512 ft	397 ft
	61 m	3,661 m	36.10		156 m	121 m
22L	200 ft	12,011 ft	208.63	CONCRETE	0 ft	433 ft
	61 m	3,661 m	216.12		0 m	132 m
03R	151 ft	10,005 ft	28.61	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.10		0 m	122 m
21L	151 ft	10,005 ft	208.62	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.11		0 m	122 m
04L	151 ft	10,003 ft	28.58	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.07		0 m	122 m
22R	151 ft	10,003 ft	208.59	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.08		0 m	122 m
09L	151 ft	8,687 ft	88.70	CONCRETE	0 ft	400 ft
	46 m	2,648 m	96.19		0 m	122 m
27R	151 ft	8,687 ft	268.72	CONCRETE	0 ft	400 ft
	46 m	2,648 m	276.22		0 m	122 m
03L	150 ft	8,505 ft	28.62	CONCRETE	0 ft	400 ft
	46 m	2,592 m	36.12		0 m	122 m
21R	150 ft	8,505 ft	208.63	CONCRETE	0 ft	397 ft
	46 m	2,592 m	216.13		0 m	121 m
09R	151 ft	8,480 ft	88.71	CONCRETE	0 ft	400 ft
	46 m	2,585 m	96.20		0 m	122 m
27L	151 ft	8,480 ft	268.73	CONCRETE	0 ft	400 ft
	46 m	2,585 m	276.22		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
--------	------	-------	-----------	-------	-------------------------	-------	-----------

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHJT	111.95 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
04R	DME	IDTW	110.70 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
22L	DME	IDWC	110.70 MHz	18 nm	-	-	646 ft
				33 km	-		646 m
03R	LOC-ILS	IHUU	111.50 MHz	18 nm	28.62	-	645 ft
				33 km	36.11		645 m
04L	LOC-ILS	IHJT	111.95 MHz	18 nm	28.59	-	645 ft
				33 km	36.08		645 m
04R	LOC-ILS	IDTW	110.70 MHz	18 nm	28.63	-	645 ft
				33 km	36.12		645 m
21L	LOC-ILS	IEJR	111.50 MHz	18 nm	208.62	-	645 ft
				33 km	216.11		645 m
22L	LOC-ILS	IDWC	110.70 MHz	18 nm	208.63	-	645 ft
				33 km	216.12		645 m
22R	LOC-ILS	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
27L	LOC-ILS	IEPA	110.15 MHz	18 nm	268.72	-	645 ft
				33 km	276.21		645 m
27R	LOC-ILS	IDMI	108.50 MHz	18 nm	268.71	-	645 ft
				33 km	276.20		645 m
22R	LOC-LOC	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
03R	GS	IHUU	111.50 MHz	10 nm	28.62	3.00	645 ft
				19 km	36.11		645 m
04L	GS	IHJT	111.95 MHz	10 nm	28.59	3.00	645 ft
				19 km	36.08		645 m
04R	GS	IDTW	110.70 MHz	10 nm	28.63	3.00	645 ft
				19 km	36.12		645 m
21L	GS	IEJR	111.50 MHz	10 nm	208.62	3.00	645 ft
				19 km	216.11		645 m
22L	GS	IDWC	110.70 MHz	10 nm	208.63	2.85	645 ft
				19 km	216.12		645 m
22R	GS	IJKI	111.95 MHz	10 nm	208.59	3.00	645 ft
				19 km	216.08		645 m
27L	GS	IEPA	110.15 MHz	10 nm	268.72	3.00	645 ft
				19 km	276.21		645 m
27R	GS	IDMI	108.50 MHz	10 nm	268.71	3.00	645 ft
				19 km	276.20		645 m

KLGA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 21 ft / 6 m
Location: 40.777200 -73.872600
Magnetic Var: 12.802 W

METAR

KLGA 160451Z 01015G31KT 8SM -DZ OVC018 16/13 A2963 RMK A02 PK WND 02031/0445 DZB49 SLP033 P0000 T01560128 40178014

TAF

KLGA 160231Z 1603/1706 03017G24KT 6SM -DZ BR OVC005 FM161700 02012G19KT P6SM SCT007 OVC010

Frequencies

REC - 125.95 MHz - ATIS ARRIVAL	REC - 127.05 MHz - ATIS DEPARTURE
TWR - 118.70 MHz - LAGUARDIA TOWER	GND - 121.70 MHz - LAGUARDIA GROUND
GND - 121.85 MHz - LAGUARDIA GROUND	GND - 127.67 MHz - LAGUARDIA GROUND
CLD - 121.87 MHz - LAGUARDIA CLEARANCE	CLD - 135.20 MHz - LAGUARDIA CLEARANCE
COM - 122.95 MHz - LAGUARDIA UNICOM	APP - 132.70 MHz - NEW YORK APPROACH
APP - 120.05 MHz - NEW YORK APPROACH	APP - 120.80 MHz - NEW YORK APPROACH
APP - 124.95 MHz - NEW YORK APPROACH	APP - 127.30 MHz - NEW YORK APPROACH
APP - 128.80 MHz - NEW YORK APPROACH	DEP - 120.40 MHz - NEW YORK DEPARTURE
DEP - 124.45 MHz - NEW YORK DEPARTURE	DEP - 127.05 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	150 ft	7,006 ft	32.03	ASPHALT	0 ft	322 ft
	46 m	2,135 m	44.83		0 m	98 m
22	150 ft	7,006 ft	212.04	ASPHALT	0 ft	98 ft
	46 m	2,135 m	224.84		0 m	30 m
13	150 ft	6,994 ft	122.24	ASPHALT	0 ft	95 ft
	46 m	2,132 m	135.04		0 m	29 m
31	150 ft	6,994 ft	302.25	ASPHALT	0 ft	374 ft
	46 m	2,132 m	315.05		0 m	114 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13	DME	IGDI	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
31	DME	IPZV	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
04	LOC-ILS	ILGA	110.50 MHz	18 nm	32.04	-	21 ft
				33 km	44.84		21 m
13	LOC-ILS	IGDI	108.50 MHz	18 nm	122.25	-	21 ft
				33 km	135.05		21 m
22	LOC-ILS	IURD	110.50 MHz	18 nm	212.04	-	21 ft
				33 km	224.84		21 m
31	LOC-LOC	IPZV	108.50 MHz	18 nm	302.25	-	21 ft
				33 km	315.05		21 m
04	GS	ILGA	110.50 MHz	10 nm	32.04	3.10	21 ft
				19 km	44.84		21 m
13	GS	IGDI	108.50 MHz	10 nm	122.25	3.10	21 ft
				19 km	135.05		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	GS	IURD	110.50 MHz	10 nm	212.04	3.00	21 ft
				19 km	224.84		21 m