

# PANC

Ted Stevens Anchorage Intl


# KSUU

Travis AFB

2024/05/12 2014Z

PANC NOWEL **J804R** MDO **B453** BOXER 4200N12500W DUHJY **V494** FOT **V27** FLUEN **T257** MERRI KSUU

1742.61 nm / 3227.31 km

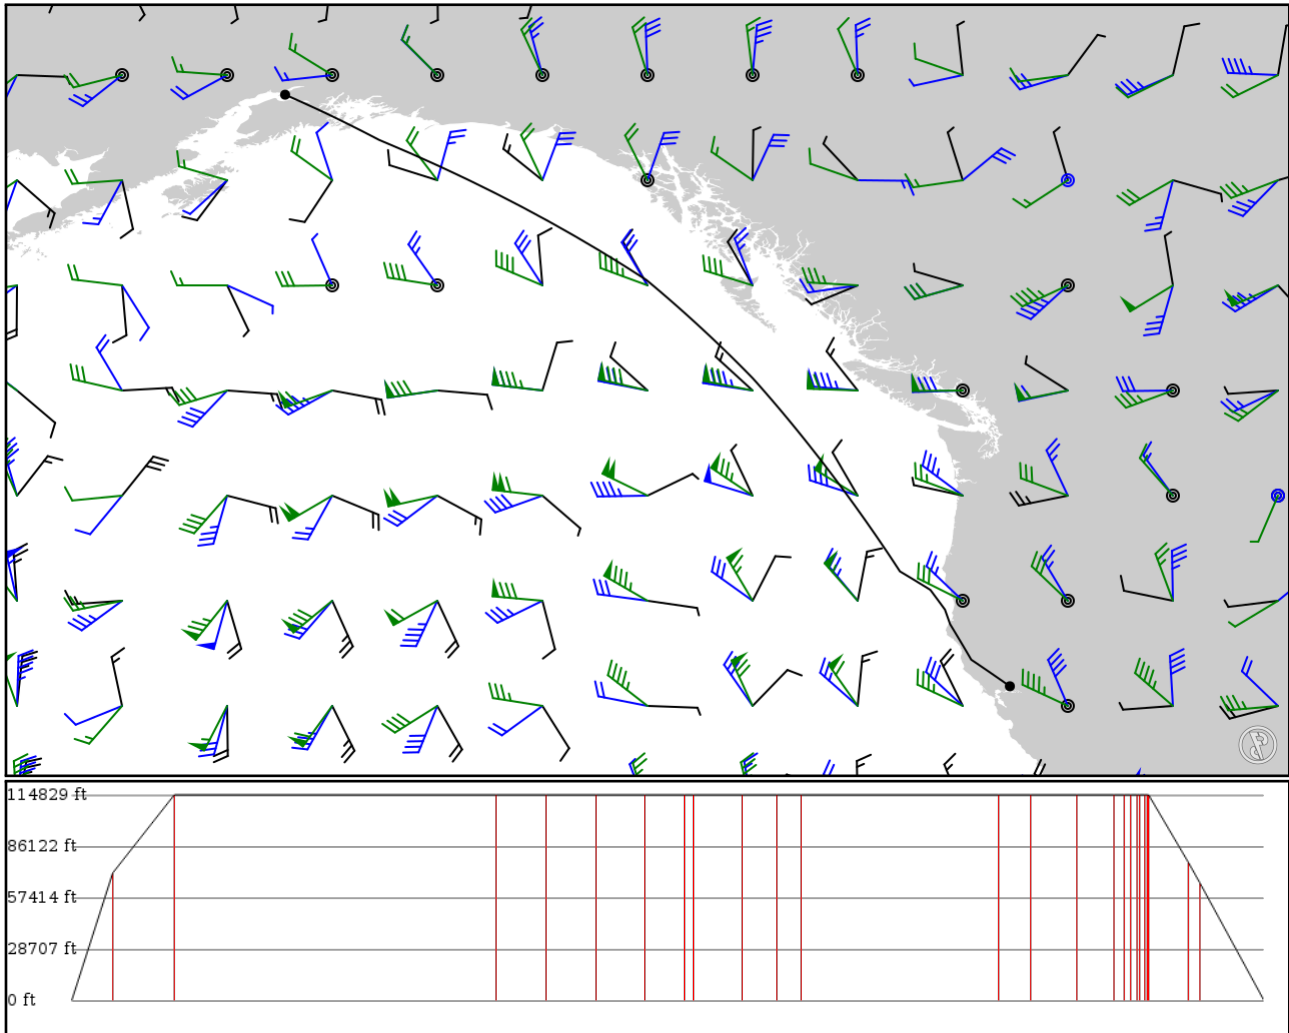

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC APT	-	61.17430 -149.99800	0 ft 0 m	-	Ted Stevens Anchorage Intl
NOWEL FIX	-	60.48390 -148.47500	21,700 ft 6,614 m	60	-
MDO VOR	J804R AWY-HI	59.42180 -146.35000	35,000 ft 10,668 m	90	MIDDLETON ISLAND
KATCH FIX	B453 AWY-HI	54.00000 -136.00000	35,000 ft 10,668 m	470	-
METPA FIX	B453 AWY-HI	53.00610 -134.83800	35,000 ft 10,668 m	72	-
NAKBI FIX	B453 AWY-HI	52.00530 -133.73300	35,000 ft 10,668 m	72	-
PETPA FIX	B453 AWY-HI	51.00500 -132.68700	35,000 ft 10,668 m	71	-
KURTT FIX	B453 AWY-HI	50.19970 -131.88500	35,000 ft 10,668 m	57	-
SIMLU FIX	B453 AWY-HI	50.00530 -131.71000	35,000 ft 10,668 m	13	-
TAMRU FIX	B453 AWY-HI	48.95580 -130.80300	35,000 ft 10,668 m	72	-
VIDKU FIX	B453 AWY-HI	48.22780 -130.20000	35,000 ft 10,668 m	49	-
KANUA FIX	B453 AWY-HI	47.69170 -129.76800	35,000 ft 10,668 m	36	-
KYLLE FIX	B453 AWY-HI	43.44000 -126.65700	35,000 ft 10,668 m	286	-
BOXER FIX	B453 AWY-HI	42.71670 -126.18000	35,000 ft 10,668 m	48	-
4200N12500W LATLON	-	42.00000 -125.00000	35,000 ft 10,668 m	67	-
DUHJY FIX	-	41.23420 -124.43400	35,000 ft 10,668 m	52	-
SEVLY FIX	V494 AWY-LO	40.97200 -124.34100	35,000 ft 10,668 m	16	-
FOYTE FIX	V494 AWY-LO	40.84020 -124.29400	35,000 ft 10,668 m	8	-
FOT VOR	V494 AWY-LO	40.67130 -124.23500	35,000 ft 10,668 m	10	FORTUNA
TUNGS FIX	V27 AWY-LO	40.61070 -124.19800	35,000 ft 10,668 m	4	-
OLRIO FIX	V27 AWY-LO	40.51990 -124.14300	35,000 ft 10,668 m	6	-
HIDAK FIX	V27 AWY-LO	40.46260 -124.10800	35,000 ft 10,668 m	3	-
EBBLS FIX	V27 AWY-LO	40.42610 -124.08600	35,000 ft 10,668 m	2	-
FLUEN FIX	V27 AWY-LO	39.54660 -123.56200	23,500 ft 7,163 m	58	-
MERRI FIX	T257 AWY-LO	39.29650 -123.41600	20,000 ft 6,096 m	16	-
KSUU APT	-	38.26740 -121.91900	0 ft 0 m	93	Travis AFB

## PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.022 E

## METAR

PANC 121953Z 18006KT 10SM SCT040 BKN090 08/02 A2962

## TAF

TAF AMD PANC 121908Z 1219/1324 VRB06KT P6SM FEW030 OVC060 FM130100 20008G16KT P6SM VCSH FEW050 BKN090 FM130400 16000

## Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.82		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.88		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.86		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.91		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.87		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.88		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.85		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.88		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.88		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.85		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.88		151 m

## KSUU

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 3

Elevation: 62 ft / 19 m  
Location: 38.267400 -121.919000  
Magnetic Var: 12.899 E

## METAR

KSUU 121955Z AUTO 23016KT 10SM CLR 24/13 A2988 RMK A02 SLP124 T02370129

## TAF

TAF KSUU 121900Z 1219/1401 24012G18KT 9999 SKC QNH2985INS BECMG 1220/1221 23010KT 9999 SKC QNH2991INS BECMG 1300/

## Frequencies

REC - 135.55 MHz - ATIS	COM - 123.30 MHz - AERO CLUB UNICOM
CLD - 127.55 MHz - CLNC DEL	GND - 121.80 MHz -
TWR - 120.75 MHz -	APP - 126.60 MHz -
APP - 119.90 MHz -	DEP - 119.90 MHz -
DEP - 126.60 MHz -	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03L	148 ft	10,998 ft	47.54	ASPHALT	0 ft	1,001 ft
	45 m	3,352 m	34.64		0 m	305 m
21R	148 ft	10,998 ft	227.55	ASPHALT	0 ft	157 ft
	45 m	3,352 m	214.65		0 m	48 m
03R	148 ft	10,997 ft	47.56	CONCRETE	0 ft	1,001 ft
	45 m	3,352 m	34.66		0 m	305 m
21L	148 ft	10,997 ft	227.57	CONCRETE	0 ft	1,001 ft
	45 m	3,352 m	214.67		0 m	305 m
04	89 ft	4,100 ft	47.55	CONCRETE	0 ft	0 ft
	27 m	1,250 m	34.65		0 m	0 m
22	89 ft	4,100 ft	227.56	CONCRETE	0 ft	0 ft
	27 m	1,250 m	214.66		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	LOC-ILS	ITXV	108.35 MHz	18 nm	47.56	-	57 ft
				33 km	34.66		57 m
21L	LOC-ILS	ISUU	110.10 MHz	18 nm	227.57	-	33 ft
				33 km	214.67		33 m
03L	GS	ITXV	108.35 MHz	10 nm	48.09	2.50	36 ft
				19 km	35.19		36 m
21L	GS	ISUU	110.10 MHz	10 nm	228.12	2.80	51 ft
				19 km	215.22		51 m