

# TKPK

Robert L Bradshaw International Airport


# KTPA

Tampa Intl

2024/06/07 1618Z

TKPK LARPP **B520** STT **RTE6** ROBL **Y587** HARDE **A555** GRADI **Y587** SEBUG **A555** GTK GTK **Y587** DONEZ **A555** ZQA  
**BR22V** OYSTA **BR54V** PBI **V531** LLNCH KTPA

1290.19 nm / 2389.44 km

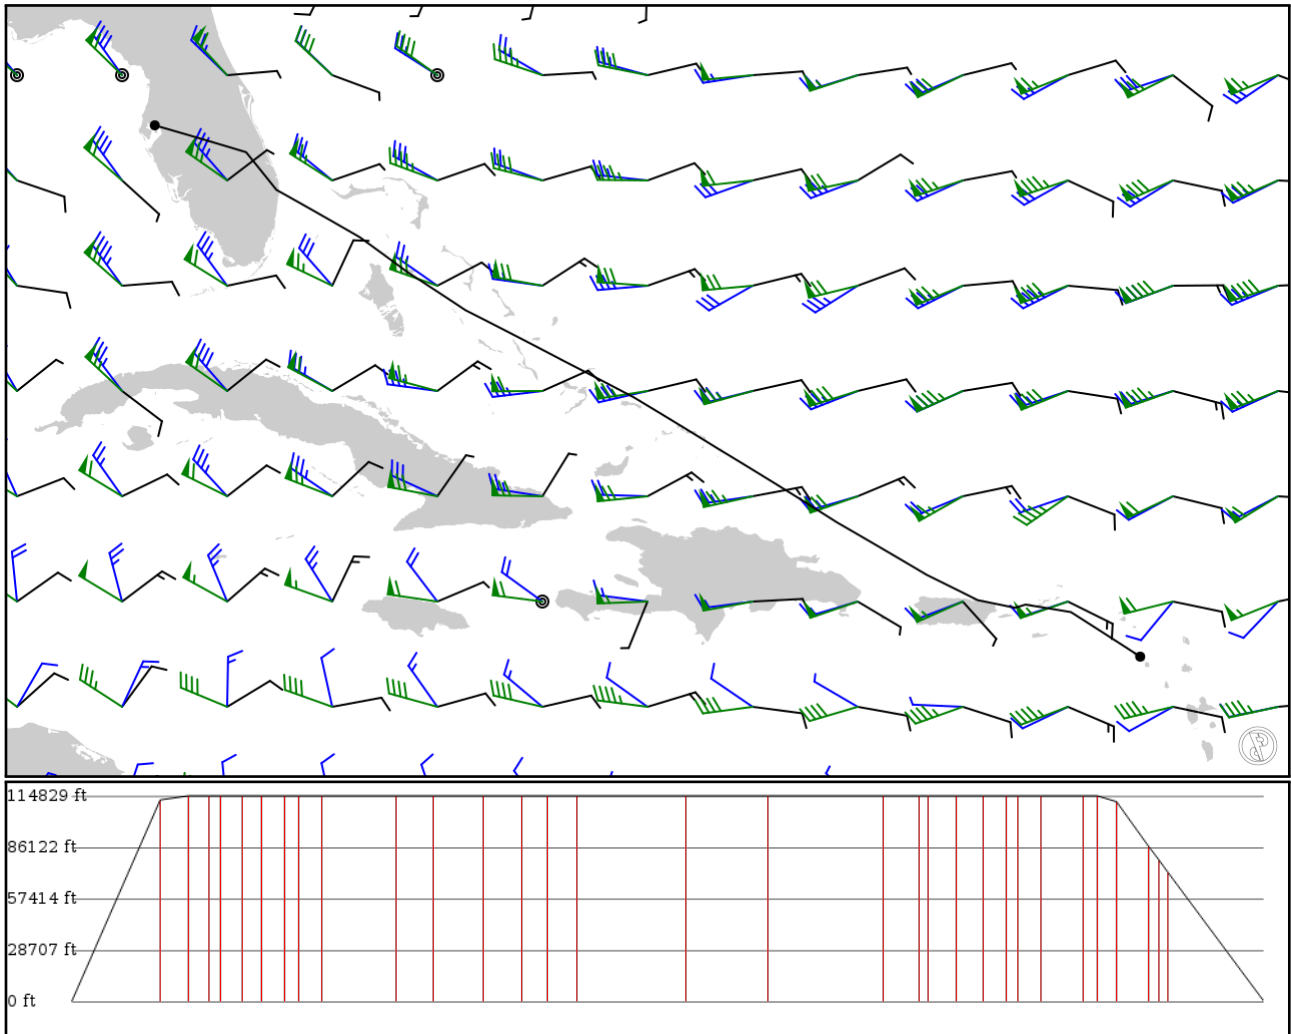

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

## Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
TKPK	-	17.31120	0 ft	-		Robert L Bradshaw International Airport
APT	-	-62.71870	0 m			
LARPP	-	18.20550	34,300 ft	96	-	
FIX	-	-64.11240	10,455 m			
PASIC	B520	18.29480	35,000 ft	31	-	
FIX	AWY-HI	-64.65000	10,668 m			
STT	B520	18.35580	35,000 ft	21		SAINT THOMAS
VOR	AWY-HI	-65.02460	10,668 m			
PALCO	RTE6	18.29170	35,000 ft	12	-	
FIX	AWY-HI	-65.23560	10,668 m			
CHAKA	RTE6	18.37290	35,000 ft	22	-	
FIX	AWY-HI	-65.62950	10,668 m			
SJU	RTE6	18.44630	35,000 ft	20		SAN JUAN
VOR	AWY-HI	-65.98950	10,668 m			
CORAF	RTE6	18.64660	35,000 ft	25	-	
FIX	AWY-HI	-66.39000	10,668 m			
BEANO	RTE6	18.75980	35,000 ft	14	-	
FIX	AWY-HI	-66.61960	10,668 m			
ROBLL	RTE6	18.95450	35,000 ft	25	-	
FIX	AWY-HI	-67.01400	10,668 m			
GAGDD	Y587	19.66440	35,000 ft	80	-	
FIX	AWY-HI	-68.22470	10,668 m			
HARDE	Y587	20.00640	35,000 ft	39	-	
FIX	AWY-HI	-68.81700	10,668 m			
GRADI	A555	20.52120	35,000 ft	55	-	
FIX	AWY-HI	-69.63200	10,668 m			
SEBUG	Y587	20.89770	35,000 ft	41	-	
FIX	AWY-HI	-70.24210	10,668 m			
COCBU	A555	21.14990	35,000 ft	27	-	
FIX	AWY-HI	-70.65440	10,668 m			
GTK	A555	21.44070	35,000 ft	32		GRAND TURK VORTAC
DME	AWY-HI	-71.13440	10,668 m			
GTK	-	21.44000	35,000 ft	0		GRAND TURK
VOR	-	-71.13500	10,668 m			
RNDLY	Y587	22.51490	35,000 ft	117	-	
FIX	AWY-HI	-72.89990	10,668 m			
PAARR	Y587	23.24500	35,000 ft	89	-	
FIX	AWY-HI	-74.30690	10,668 m			
DONEZ	Y587	24.26300	35,000 ft	124	-	
FIX	AWY-HI	-76.28250	10,668 m			
BOSAR	A555	24.63700	35,000 ft	38	-	
FIX	AWY-HI	-76.84990	10,668 m			
LEPAS	A555	24.74040	35,000 ft	10	-	
FIX	AWY-HI	-77.00790	10,668 m			
ZQA	A555	25.02550	35,000 ft	29		NASSAU
VOR	AWY-HI	-77.44640	10,668 m			
MAJUR	BR22V	25.33010	35,000 ft	29	-	
FIX	AWY-HI	-77.86100	10,668 m			
CAREY	BR22V	25.59880	35,000 ft	25	-	
FIX	AWY-HI	-78.23000	10,668 m			
OYSTA	BR22V	25.72850	35,000 ft	12	-	
FIX	AWY-HI	-78.40900	10,668 m			
ISAAC	BR54V	25.95210	35,000 ft	24	-	

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	-78.79780	10,668 m			
PRED	BR54V	26.35800	35,000 ft	45	-	
FIX	AWY-HI	-79.51170	10,668 m			
MRLIN	BR54V	26.50090	35,000 ft	16	-	
FIX	AWY-HI	-79.76600	10,668 m			
PBI	BR54V	26.68010	34,000 ft	20		PALM BEACH
VOR	AWY-HI	-80.08650	10,363 m			
TBIRD	V531	27.15620	26,400 ft	35	-	
FIX	AWY-LO	-80.46940	8,047 m			
SHEDS	V531	27.30130	24,100 ft	10	-	
FIX	AWY-LO	-80.58710	7,346 m			
LLNCH	V531	27.43550	22,000 ft	9	-	
FIX	AWY-LO	-80.69570	6,706 m			
KTPA	-	27.97490	0 ft	102		Tampa Intl
APT	-	-82.53190	0 m			

## KTPA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 3

Elevation: 26 ft / 8 m  
Location: 27.974900 -82.531900  
Magnetic Var: 6.203 W

## METAR

KTPA 071553Z 23007KT 10SM SCT022 31/24 A2992 RMK A02 SLP131 T03110244

## TAF

KTPA 071503Z 0715/0818 26007KT P6SM SCT030 SCT250 FM071800 27010KT P6SM FEW040 SCT250 FM080600 27003KT P6SM FEW250

## Frequencies

REC - 126.45 MHz - D-ATIS  
COM - 122.95 MHz - UNICOM  
GND - 121.70 MHz - TAMPA GROUND  
TWR - 119.50 MHz - TAMPA TOWER  
APP - 118.15 MHz - TAMPA APPROACH  
APP - 119.65 MHz - TAMPA APPROACH  
APP - 118.80 MHz - TAMPA APPROACH

REC - 128.47 MHz - D-ATIS  
CLD - 133.60 MHz - CLEARANCE DELIVERY  
GND - 121.35 MHz - TAMPA GROUND  
TWR - 119.05 MHz - TAMPA TOWER  
DEP - 118.15 MHz - TAMPA DEPARTURE  
DEP - 119.65 MHz - TAMPA DEPARTURE  
DEP - 118.80 MHz - TAMPA DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	151 ft	11,011 ft	1.72	CONCRETE	0 ft	417 ft
	46 m	3,356 m	7.92		0 m	127 m
19R	151 ft	11,011 ft	181.72	CONCRETE	0 ft	417 ft
	46 m	3,356 m	187.92		0 m	127 m
01R	151 ft	8,308 ft	1.72	CONCRETE	0 ft	410 ft
	46 m	2,532 m	7.92		0 m	125 m
19L	151 ft	8,308 ft	181.72	CONCRETE	0 ft	410 ft
	46 m	2,532 m	187.92		0 m	125 m
10	151 ft	7,005 ft	91.74	ASPHALT	505 ft	187 ft
	46 m	2,135 m	97.94		154 m	57 m
28	151 ft	7,005 ft	271.75	ASPHALT	0 ft	141 ft
	46 m	2,135 m	277.95		0 m	43 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	DME	IJRT	108.50 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
01L	LOC-ILS	IAMP	108.90 MHz	18 nm	1.72	-	22 ft
				33 km	7.92		22 m
19L	LOC-ILS	ITPA	110.30 MHz	18 nm	181.72	-	26 ft
				33 km	187.92		26 m
19R	LOC-ILS	IJRT	108.50 MHz	18 nm	181.72	-	26 ft
				33 km	187.92		26 m
01R	LOC-LOC	ITWJ	111.95 MHz	18 nm	1.72	-	26 ft
				33 km	7.92		26 m
01L	GS	IAMP	108.90 MHz	10 nm	1.72	3.00	26 ft
				19 km	7.92		26 m
19L	GS	ITPA	110.30 MHz	10 nm	181.72	3.00	26 ft
				19 km	187.92		26 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	GS	IJRT	108.50 MHz	10 nm	181.72	3.00	26 ft
				19 km	187.92		26 m