

PANC

Ted Stevens Anchorage Intl


PAED

Elmendorf AFB

2024/05/02 2023Z

PANC TED PAED

7.87 nm / 14.58 km

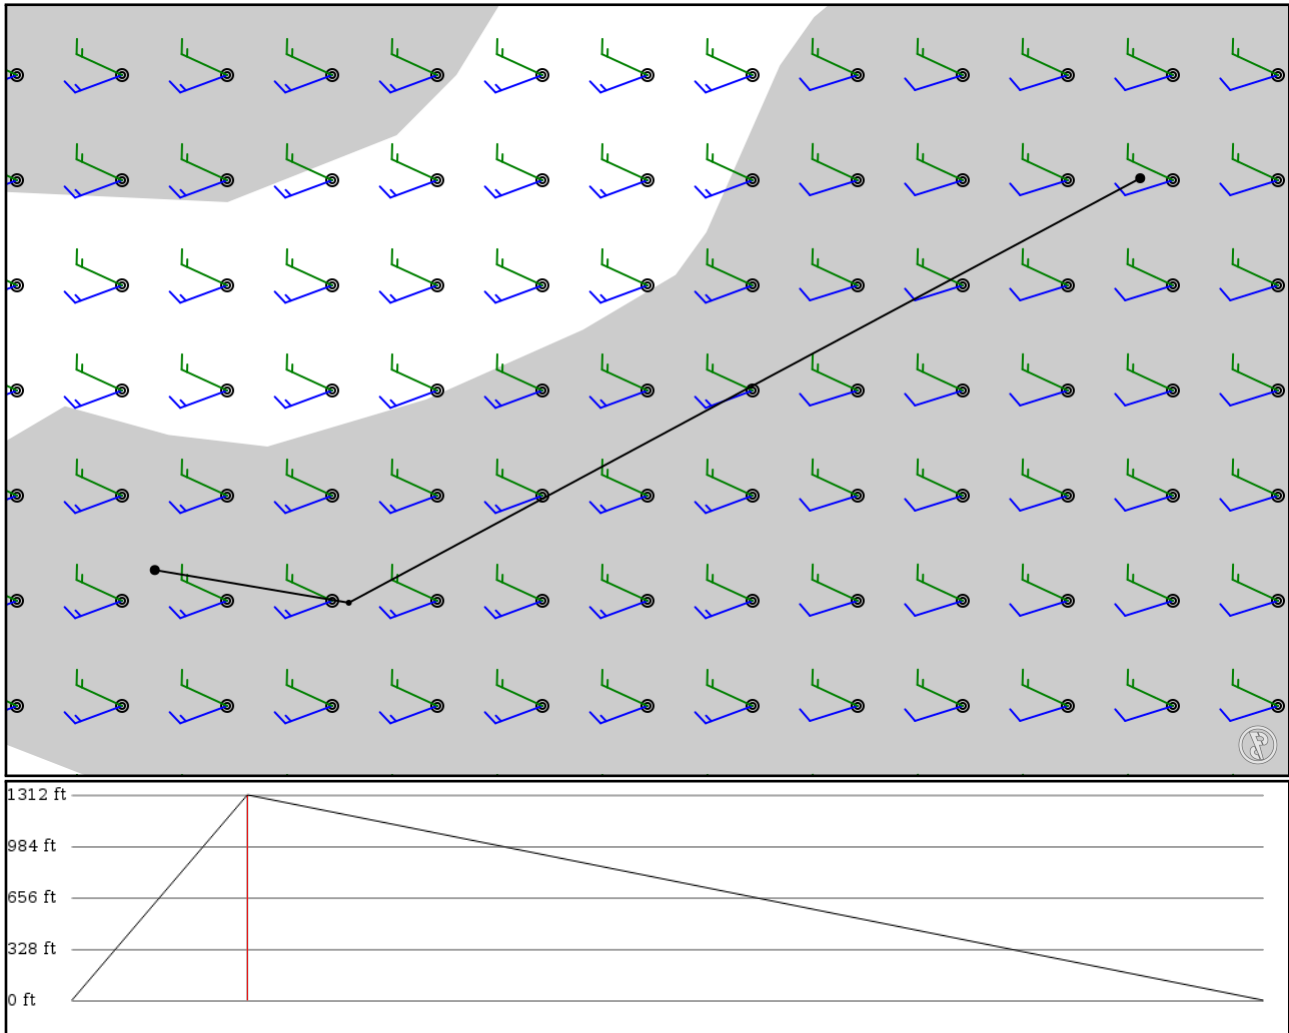

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC	-	61.17430	0 ft	-	Ted Stevens Anchorage Intl
APT	-	-149.99800	0 m		
TED	-	61.16790	400 ft	1	ANCHORAGE
VOR	-	-149.96000	122 m		
PAED	-	61.25100	0 ft	6	Elmendorf AFB
APT	-	-149.80500	0 m		

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.032 E

METAR

PANC 021953Z 27006KT 10SM OVC110 08/02 A2997

TAF

PANC 021736Z 0218/0324 30005KT P6SM SCT070 BKN100 FM030000 16008KT P6SM BKN080 FM030600 01004KT P6SM FEW035 OVC050

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.81		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.87		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.85		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.90		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.86		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.87		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.87		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.84		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.87		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.87		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.84		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.87		151 m

PAED

Region: USA (ALASKA)
Timezone: AMERICA/ANCHORAGE
Runways: 2

Elevation: 212 ft / 65 m
Location: 61.251000 -149.805000
Magnetic Var: 14.098 E

METAR

PAED 021855Z 00000KT 10SM FEW070 BKN100 OVC110 08/01 A2996

TAF

TAF PAED 021300Z 0213/0319 36006KT 9999 BKN050 BKN080 OVC100 510204 QNH2984INS BECMG 0315/0316 36006KT 9999 -RA BR

Frequencies

REC - 124.30 MHz - ATIS	CLD - 128.80 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - ELMENDORF GROUND	TWR - 127.20 MHz - ELMENDORF TOWER
APP - 118.60 MHz - ANCHORAGE APPROACH	APP - 134.10 MHz - ANCHORAGE APPROACH
DEP - 118.60 MHz - ANCHORAGE DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	200 ft	10,009 ft	79.99	ASPHALT	0 ft	1,001 ft
	61 m	3,051 m	65.89		0 m	305 m
24	200 ft	10,009 ft	260.04	ASPHALT	0 ft	1,001 ft
	61 m	3,051 m	245.94		0 m	305 m
16	150 ft	8,035 ft	179.97	ASPHALT	0 ft	945 ft
	46 m	2,449 m	165.87		0 m	288 m
34	150 ft	8,035 ft	359.97	ASPHALT	558 ft	154 ft
	46 m	2,449 m	345.87		170 m	47 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IEDF	110.30 MHz	18 nm	80.01	-	212 ft
				33 km	65.91		212 m
06	GS	IEDF	110.30 MHz	10 nm	80.01	3.00	212 ft
				19 km	65.91		212 m