

EGGD

Bristol International


LELC

Murcia San Javier

2024/06/09 0942Z

EGGD ORTAC **UL14** DIN **UN862** MLA **UN860** VLC LELC

849.27 nm / 1572.85 km

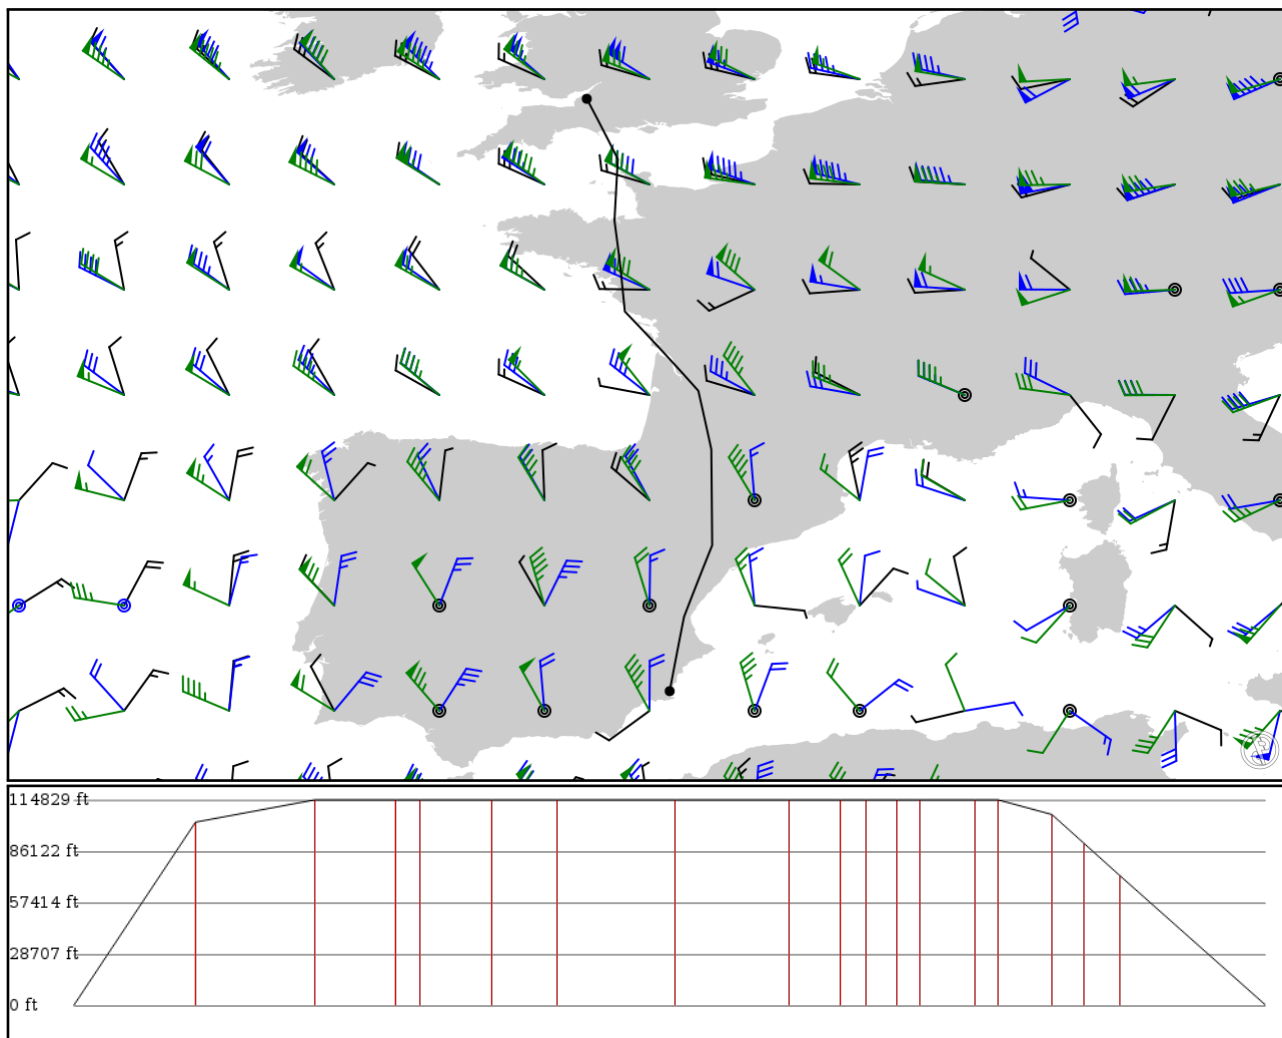

Notes

Basic altitude profile:

- Ascent Rate: 1700ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 40000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EGGD	-	51.38266	0 ft	-	Bristol International
APT	-	-2.71892	0 m		
ORTAC	-	49.99917	31,200 ft	87	-
FIX	-	-2.00500	9,510 m		
DIN	UL14	48.58606	35,000 ft	84	DINARD PLEURTUIT SAINT MALO VO
VOR	AWY-HI	-2.08233	10,668 m		
GODAN	UN862	47.64194	35,000 ft	56	-
FIX	AWY-HI	-1.96000	10,668 m		
TERPO	UN862	47.34889	35,000 ft	17	-
FIX	AWY-HI	-1.92889	10,668 m		
LAGOR	UN862	46.50000	35,000 ft	51	-
FIX	AWY-HI	-1.84417	10,668 m		
DILRA	UN862	45.85000	35,000 ft	46	-
FIX	AWY-HI	-1.22556	10,668 m		
SAU	UN862	44.67681	35,000 ft	83	SAUVETERRE DE GUYENNE VOR
VOR	AWY-HI	-0.15292	10,668 m		
TBO	UN862	43.33222	35,000 ft	81	TARBES VOR
VOR	AWY-HI	0.14575	10,668 m		
PERDU	UN862	42.73208	35,000 ft	36	-
FIX	AWY-HI	0.15120	10,668 m		
BROTO	UN862	42.42440	35,000 ft	18	-
FIX	AWY-HI	0.15395	10,668 m		
POSSY	UN862	42.06130	35,000 ft	21	-
FIX	AWY-HI	0.15716	10,668 m		
DIRMU	UN862	41.78551	35,000 ft	16	-
FIX	AWY-HI	0.15964	10,668 m		
MLA	UN862	41.12959	35,000 ft	39	MAELLA VOR-DME
VOR	AWY-HI	0.16524	10,668 m		
CRETA	UN860	40.87226	35,000 ft	16	-
FIX	AWY-HI	0.06156	10,668 m		
SAURA	UN860	40.25603	32,500 ft	38	-
FIX	AWY-HI	-0.18336	9,906 m		
PLANA	UN860	39.89043	27,600 ft	22	-
FIX	AWY-HI	-0.32646	8,412 m		
VLC	UN860	39.48565	22,100 ft	25	VALENCIA VOR-DME
VOR	AWY-HI	-0.48304	6,736 m		
LELC	-	37.78026	0 ft	103	Murcia San Javier
APT	-	-0.81226	0 m		

LELC

Region: SPAIN
Timezone: EUROPE/MADRID
Runways: 2

Elevation: 29 ft / 9 m
Location: 37.775000 -0.812500
Magnetic Var: 0.828 E

METAR

LELC 090930Z 27007KT 230V320 CAVOK 29/11 Q1009 NOSIG

TAF

TAF LELC 090500Z 0906/1006 27008KT CAVOK TX29/0914Z TN20/0906Z BECMG 0910/0912 21015KT PROB30 TEMPO 0911/0916 210

Frequencies

APP - 130.30 MHz - SAN JAVIER APPROACH	APP - 398.32 MHz - SAN JAVIER APPROACH
APP - 125.02 MHz - SAN JAVIER APPROACH	TWR - 124.42 MHz - TOWER CIV
TWR - 139.30 MHz - TOWER	TWR - 143.67 MHz - TOWER
TWR - 257.80 MHz - TOWER	GND - 121.60 MHz - GMC
GND - 278.57 MHz - GMC MIL	TWR - 125.02 MHz - TOWER BACK-UP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	148 ft	7,611 ft	45.64	ASPHALT	0 ft	600 ft
	45 m	2,320 m	44.82		0 m	183 m
23L	148 ft	7,611 ft	225.66	ASPHALT	0 ft	617 ft
	45 m	2,320 m	224.83		0 m	188 m
05L	148 ft	5,173 ft	45.63	ASPHALT	0 ft	646 ft
	45 m	1,577 m	44.81		0 m	197 m
23R	148 ft	5,173 ft	225.64	ASPHALT	0 ft	748 ft
	45 m	1,577 m	224.81		0 m	228 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	LOC-ILS	ISJ	110.50 MHz	18 nm	46.65	-	11 ft
				33 km	45.82		11 m
23L	LOC-ILS	ISR	109.30 MHz	18 nm	226.65	-	11 ft
				33 km	225.82		11 m