

# EFHK

Helsinki Vantaa Intl


# EGKK

London Gatwick

2024/06/06 0532Z

EFHK EKNID M6 SVD N872 DEGUL UN872 EEL UZ701 GORLO UL980 REFSO UZ291 RIMBU EGKK

1018.65 nm / 1886.54 km

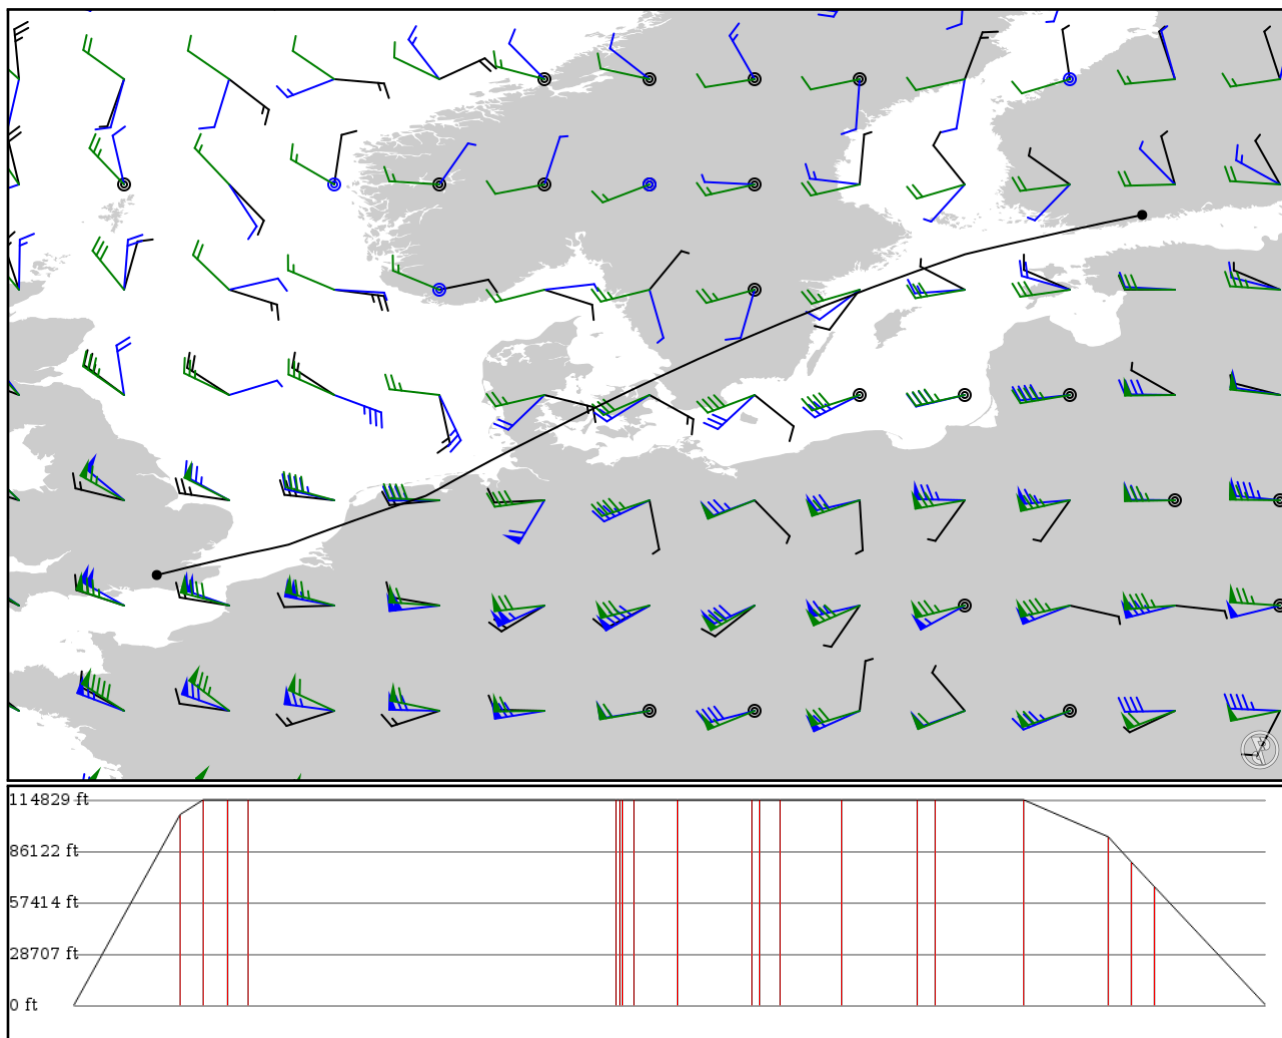

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EFHK APT	-	60.32040 24.95220	0 ft 0 m	-	Helsinki Vantaa Intl
EKNID FIX	-	59.71670 22.16250	32,500 ft 9,906 m	91	-
OLPED FIX	M6 AWY-HI	59.58310 21.56080	35,000 ft 10,668 m	19	-
OBEVI FIX	M6 AWY-HI	59.43560 20.92310	35,000 ft 10,668 m	21	-
NISIX FIX	M6 AWY-HI	59.31860 20.43170	35,000 ft 10,668 m	16	-
SVD DME	M6 AWY-HI	56.16890 12.57380	35,000 ft 10,668 m	314	SVEDA VOR-DME
KOPIM FIX	N872 AWY-HI	56.13390 12.49830	35,000 ft 10,668 m	3	-
LASGI FIX	N872 AWY-HI	56.11330 12.45440	35,000 ft 10,668 m	1	-
NAROL FIX	N872 AWY-HI	56.00580 12.22500	35,000 ft 10,668 m	10	-
DOBEL FIX	N872 AWY-HI	55.60610 11.39000	35,000 ft 10,668 m	37	-
ALS VOR	N872 AWY-HI	54.90540 9.99338	35,000 ft 10,668 m	63	ALSIE
DEMIR FIX	N872 AWY-HI	54.83640 9.85278	35,000 ft 10,668 m	6	-
DEGUL FIX	N872 AWY-HI	54.64670 9.46944	35,000 ft 10,668 m	17	-
GOLEN FIX	UN872 AWY-HI	54.05970 8.32083	35,000 ft 10,668 m	53	-
KUBAT FIX	UN872 AWY-HI	53.33640 6.99361	35,000 ft 10,668 m	64	-
EEL VOR	UN872 AWY-HI	53.16420 6.66676	35,000 ft 10,668 m	15	EELDE (GRONINGEN)
SPY VOR	UZ701 AWY-HI	52.54030 4.85378	35,000 ft 10,668 m	75	SPIJKERBOOR
GORLO FIX	UZ701 AWY-HI	51.92410 3.17184	28,700 ft 8,748 m	72	-
REFSO FIX	UL980 AWY-HI	51.80960 2.66691	24,400 ft 7,437 m	19	-
RIMBU FIX	UZ291 AWY-HI	51.70630 2.16211	20,200 ft 6,157 m	19	-
EGKK APT	-	51.14880 -0.19192	0 ft 0 m	94	London Gatwick

## EFHK

Region: FINLAND  
Timezone: EUROPE/HELSINKI  
Runways: 3

Elevation: 180 ft / 55 m  
Location: 60.320400 24.952200  
Magnetic Var: 9.973 E

## METAR

EFHK 060520Z 17008KT 140V210 CAVOK 20/11 Q1008 NOSIG

## TAF

TAF TAF EFHK 060232Z 0603/0703 VRB02KT CAVOK BECMG 0607/0609 21010KT TEMPO 0608/0613 7000 SHRA SCT015 BKN050CB BE

## Frequencies

REC - 135.07 MHz - ATIS ARRIVAL	REC - 114.20 MHz - ATIS DEPARTURE
TWR - 119.70 MHz - HELSINKI TOWER	TWR - 118.85 MHz - HELSINKI TOWER
TWR - 118.60 MHz - HELSINKI TOWER	GND - 121.80 MHz - HELSINKI GROUND
GND - 118.12 MHz - HELSINKI GROUND	GND - 121.65 MHz - HELSINKI RAMP/TAXI
APP - 119.10 MHz - HELSINKI RADAR APPROACH	APP - 129.85 MHz - HELSINKI RADAR APPROACH
APP - 119.70 MHz - HELSINKI RADAR APPROACH	APP - 124.32 MHz - HELSINKI ARRIVAL
APP - 119.90 MHz - HELSINKI ARRIVAL	GND - 127.02 MHz - HELSINKI DE-ICING

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.51		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.55		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.45		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.49		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.09		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.11		0 m	60 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.48		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.54		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.11		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.54		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.48		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.48		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.54		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.11		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.54		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.48		180 m

## EGKK

Region: UNITED KINGDOM  
Timezone: EUROPE/LONDON  
Runways: 2

Elevation: 187 ft / 57 m  
Location: 51.148800 -0.191923  
Magnetic Var: 0.506 E

## METAR

EGKK 060520Z 23004KT CAVOK 09/06 Q1016

## TAF

TAF EGKK 052256Z 0600/0706 27008KT 9999 FEW045 PROB30 TEMPO 0607/0614 7000 SHRA

## Frequencies

REC - 136.52 MHz - GATWICK INFORMATION	GND - 121.80 MHz - GATWICK GROUND
TWR - 124.22 MHz - GATWICK TOWER	TWR - 134.22 MHz - GATWICK TOWER
CLD - 121.95 MHz - GATWICK DELIVERY	APP - 118.95 MHz - GATWICK DIRECTOR
APP - 126.82 MHz - GATWICK DIRECTOR	APP - 129.02 MHz - GATWICK DIRECTOR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08R	148 ft	10,851 ft	77.60	ASPHALT	1,289 ft	0 ft
	45 m	3,308 m	77.09		393 m	0 m
26L	148 ft	10,851 ft	257.63	ASPHALT	1,388 ft	102 ft
	45 m	3,308 m	257.13		423 m	31 m
08L	148 ft	8,382 ft	77.59	ASPHALT	1,047 ft	0 ft
	45 m	2,555 m	77.08		319 m	0 m
26R	148 ft	8,382 ft	257.61	ASPHALT	1,358 ft	0 ft
	45 m	2,555 m	257.11		414 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	IGG	110.90 MHz	18 nm	-	-	274 ft
				33 km	-		274 m
26L	DME	IWW	110.90 MHz	18 nm	-	-	274 ft
				33 km	-		274 m
08R	LOC-ILS	IGG	110.90 MHz	18 nm	77.62	-	187 ft
				33 km	77.11		187 m
26L	LOC-ILS	IWW	110.90 MHz	18 nm	257.62	-	187 ft
				33 km	257.11		187 m
08R	GS	IGG	110.90 MHz	10 nm	77.62	3.00	187 ft
				19 km	77.11		187 m
26L	GS	IWW	110.90 MHz	10 nm	257.62	3.00	187 ft
				19 km	257.11		187 m