

KLFT

LAFAYETTE RGNL


KLIT

Adams Field/Bill and Hillary Clinton National

2024/05/22 0649Z

KLFT TULLO **V554** MLU **V94** GALIO HARES KLIT

281.61 nm / 521.53 km

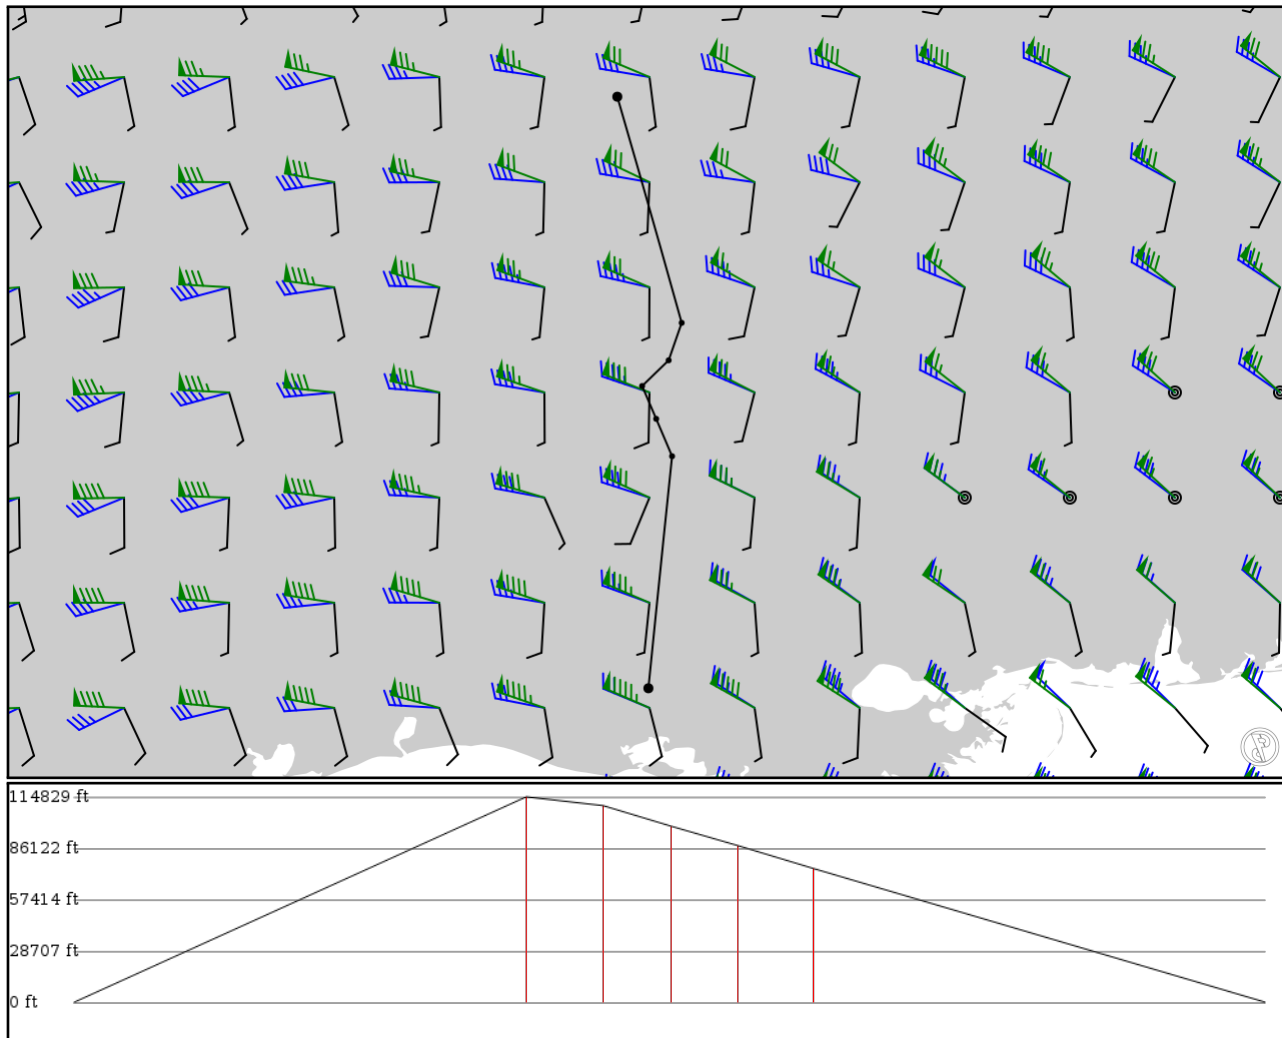

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
KLFT	-	30.20500	0 ft	-	LAFAYETTE	RGNL
APT	-	-91.98800	0 m			
TULLO	-	31.97990	35,000 ft	107	-	
FIX	-	-91.80680	10,668 m			
BOSCY	V554	32.26570	33,500 ft	18	-	
FIX	AWY-LO	-91.92840	10,211 m			
MLU	V554	32.51690	30,000 ft	16	MONROE	
VOR	AWY-LO	-92.03600	9,144 m			
GALIO	V94	32.71360	26,700 ft	15	-	
FIX	AWY-LO	-91.83290	8,138 m			
HARES	-	33.00000	22,800 ft	17	-	
FIX	-	-91.73330	6,949 m			
KLIT	-	34.72960	0 ft	106	Adams Field/Bill and Hillary Clinton National	
APT	-	-92.22590	0 m			

KLFT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 42 ft / 13 m
Location: 30.205000 -91.988000
Magnetic Var: 0.363 W

METAR

KLFT 220553Z AUTO 13005KT 10SM CLR 25/23 A2989 RMK A02 SLP122 T02500233 10289 20250 403170233 58006 \$

TAF

TAF KLFT 220520Z 2206/2306 17012KT P6SM FEW020 OVC250 FM221100 16008KT 6SM BR OVC015 FM221700 14006KT P6SM SCT025

Frequencies

REC - 134.05 MHz - ATIS	COM - 118.50 MHz - CTAF
COM - 122.95 MHz - UNICOM	CLD - 125.55 MHz - CLNC DEL
GND - 121.80 MHz -	TWR - 118.50 MHz -
APP - 121.10 MHz - APP/DEP	APP - 128.70 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	150 ft	8,048 ft	38.60	ASPHALT	0 ft	600 ft
	46 m	2,453 m	38.96		0 m	183 m
22L	150 ft	8,048 ft	218.61	ASPHALT	0 ft	102 ft
	46 m	2,453 m	218.97		0 m	31 m
11	148 ft	5,394 ft	109.70	ASPHALT	0 ft	0 ft
	45 m	1,644 m	110.06		0 m	0 m
29	148 ft	5,394 ft	289.70	ASPHALT	0 ft	0 ft
	45 m	1,644 m	290.07		0 m	0 m
04L	75 ft	4,104 ft	38.63	ASPHALT	0 ft	0 ft
	23 m	1,251 m	38.99		0 m	0 m
22R	75 ft	4,104 ft	218.63	ASPHALT	0 ft	0 ft
	23 m	1,251 m	219.00		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	ITYN	110.90 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
22L	DME	ILFT	109.50 MHz	18 nm	-	-	52 ft
				33 km	-		52 m
04R	LOC-ILS	ITYN	110.90 MHz	18 nm	38.12	-	11 ft
				33 km	38.49		11 m
22L	LOC-ILS	ILFT	109.50 MHz	18 nm	219.11	-	42 ft
				33 km	219.48		42 m
04R	GS	ITYN	110.90 MHz	10 nm	39.21	3.00	35 ft
				19 km	39.57		35 m
22L	GS	ILFT	109.50 MHz	10 nm	219.21	3.00	35 ft
				19 km	219.57		35 m

KLIT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 266 ft / 81 m
Location: 34.729600 -92.225900
Magnetic Var: 0.420 W

METAR

KLIT 220553Z 19009G19KT 10SM -RA SCT060 BKN080 OVC100 24/22 A2984 RMK A02 SLP105 FRQ LTG DSNT E CB DSNT E MOV E P00

TAF

KLIT 220600Z 2206/2306 19009G16KT P6SM VCTS SCT035CB OVC070 TEMPO 2206/2207 5SM -SHRA BR BKN035 FM221000 20006KT

Frequencies

CLD - 118.95 MHz - ADAMS CLEARANCE DELIVERY	GND - 121.90 MHz - ADAMS GROUND
TWR - 118.70 MHz - ADAMS TOWER	REC - 125.65 MHz - ATIS
DEP - 119.50 MHz - LITTLE ROCK DEPARTURE	DEP - 135.40 MHz - LITTLE ROCK DEPARTURE
APP - 119.50 MHz - LITTLE ROCK APPROACH	APP - 135.40 MHz - LITTLE ROCK APPROACH
COM - 122.95 MHz - ADAMS UNICOM	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	151 ft	6,243 ft	181.51	CONCRETE	0 ft	0 ft
	46 m	1,903 m	181.93		0 m	0 m
36	151 ft	6,243 ft	1.51	CONCRETE	164 ft	194 ft
	46 m	1,903 m	1.93		50 m	59 m
04R	151 ft	8,259 ft	46.39	CONCRETE	1,056 ft	194 ft
	46 m	2,517 m	46.81		322 m	59 m
22L	151 ft	8,259 ft	226.40	CONCRETE	0 ft	400 ft
	46 m	2,517 m	226.82		0 m	122 m
04L	151 ft	8,282 ft	46.38	CONCRETE	305 ft	705 ft
	46 m	2,524 m	46.80		93 m	215 m
22R	151 ft	8,282 ft	226.39	CONCRETE	0 ft	200 ft
	46 m	2,524 m	226.81		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	ILIT	110.30 MHz	18 nm	-	-	265 ft
				33 km	-		265 m
04R	DME	ICNL	111.30 MHz	18 nm	-	-	254 ft
				33 km	-		254 m
22R	DME	IAAY	110.30 MHz	18 nm	-	-	265 ft
				33 km	-		265 m
04L	LOC-ILS	ILIT	110.30 MHz	18 nm	46.39	-	262 ft
				33 km	46.81		262 m
04R	LOC-ILS	ICNL	111.30 MHz	18 nm	46.39	-	262 ft
				33 km	46.81		262 m
22L	LOC-ILS	IBWY	110.70 MHz	18 nm	226.39	-	262 ft
				33 km	226.81		262 m
22R	LOC-ILS	IAAY	110.30 MHz	18 nm	226.39	-	262 ft
				33 km	226.81		262 m
04L	GS	ILIT	110.30 MHz	10 nm	46.39	3.00	262 ft
				19 km	46.81		262 m
04R	GS	ICNL	111.30 MHz	10 nm	46.39	3.00	262 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	46.81		262 m
22L	GS	IBWY	110.70 MHz	10 nm	226.39	3.00	262 ft
				19 km	226.81		262 m
22R	GS	IAAY	110.30 MHz	10 nm	226.39	3.00	262 ft
				19 km	226.81		262 m