

KLBB

LUBBOCK PRESTON SMITH INTL


KSWO

STILLWATER RGNL

2024/05/29 0124Z

KLBB CDS **V14** CARFF KSWO

280.77 nm / 519.98 km

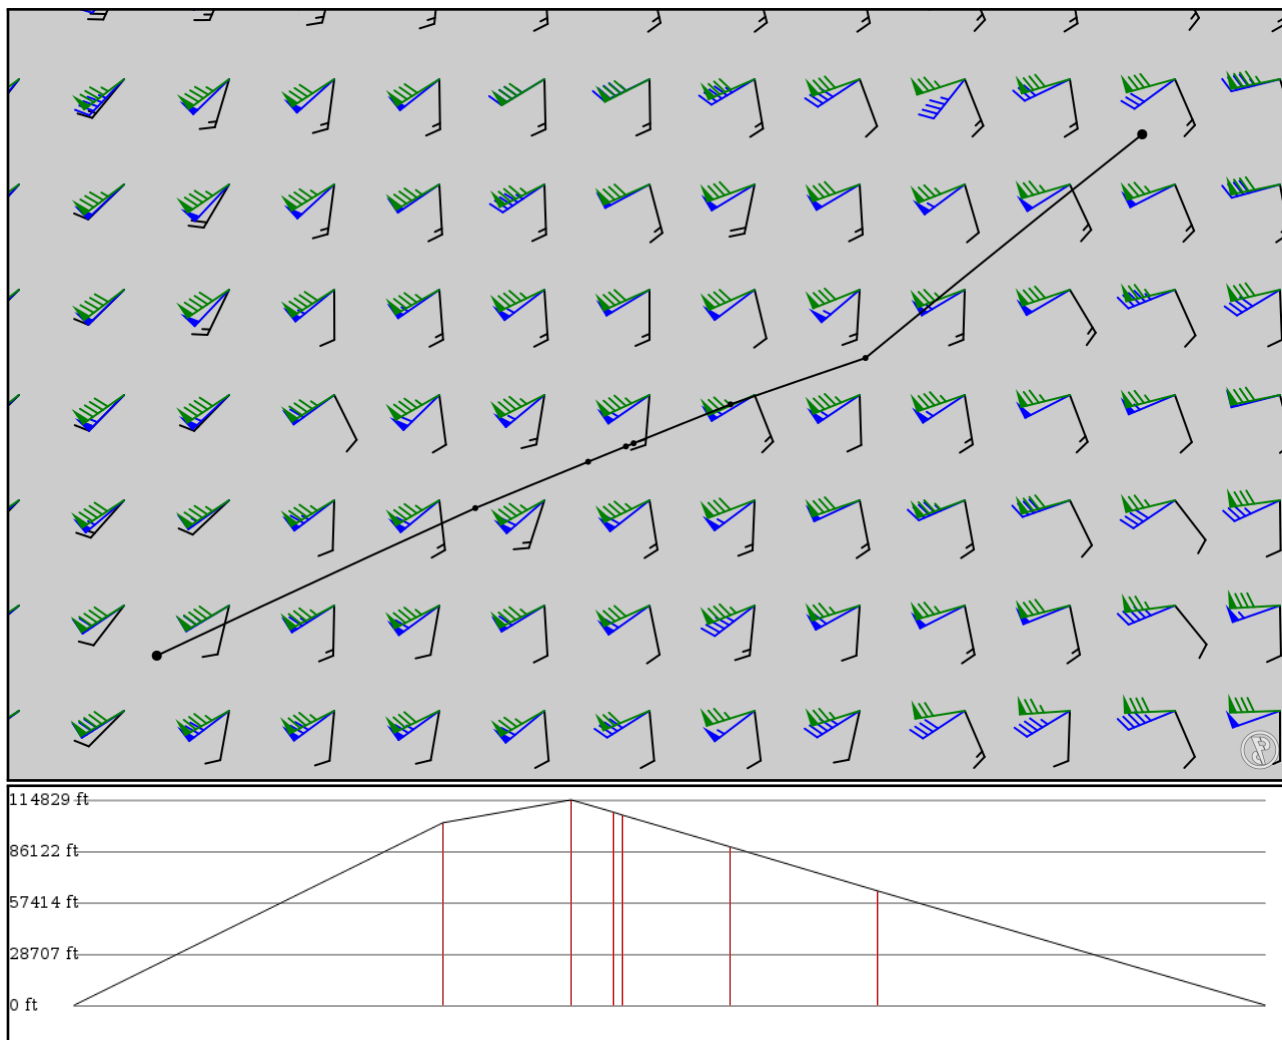

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLBB APT	-	33.66160 -101.81900	0 ft 0 m	-	LUBBOCK PRESTON SMITH INTL
CDS VOR	-	34.36910 -100.28900	31,100 ft 9,479 m	87	CHILDRESS
JAMMZ FIX	V14 AWY-LO	34.59130 -99.74700	35,000 ft 10,668 m	29	-
ADOBE FIX	V14 AWY-LO	34.66490 -99.56570	32,900 ft 10,028 m	9	-
JUMEK FIX	V14 AWY-LO	34.67990 -99.52850	32,400 ft 9,876 m	2	-
HBR VOR	V14 AWY-LO	34.86660 -99.06340	27,000 ft 8,230 m	25	HOBART
CARFF FIX	V14 AWY-LO	35.08890 -98.41490	19,500 ft 5,944 m	34	-
KSWO APT	-	36.16120 -97.08570	0 ft 0 m	91	STILLWATER RGNL

KLBB

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 3,282 ft / 1,000 m
Location: 33.661600 -101.819000
Magnetic Var: 5.463 E

METAR

KLBB 290107Z 10023G30KT 10SM -RA FEW050 SCT090 SCT150 BKN220 21/16 A3002 RMK AO2 PK WND 11037/0054 LTG DSNT SE AND

TAF

KLBB 282323Z 2900/2924 09020KT P6SM VCTS FEW060CB BKN120 FM291000 10011KT P6SM OVC015 FM292000 12015KT P6SM BKN05

Frequencies

TWR - 120.50 MHz - LUBBOCK TOWER
REC - 125.30 MHz - ATIS
DEP - 119.90 MHz - LUBBOCK DEPARTURE
GND - 121.90 MHz - LUBBOCK GROUND
APP - 119.90 MHz - LUBBOCK APPROACH
CLD - 125.80 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17L	75 ft	2,896 ft	179.64	ASPHALT	0 ft	0 ft
	23 m	883 m	174.18		0 m	0 m
35R	75 ft	2,896 ft	359.64	ASPHALT	0 ft	59 ft
	23 m	883 m	354.18		0 m	18 m
08	151 ft	8,010 ft	89.66	CONCRETE	0 ft	187 ft
	46 m	2,441 m	84.19		0 m	57 m
26	151 ft	8,010 ft	269.67	CONCRETE	0 ft	190 ft
	46 m	2,441 m	264.21		0 m	58 m
17R	151 ft	11,510 ft	179.66	CONCRETE	0 ft	210 ft
	46 m	3,508 m	174.20		0 m	64 m
35L	151 ft	11,510 ft	359.66	CONCRETE	0 ft	210 ft
	46 m	3,508 m	354.20		0 m	64 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17R	DME	ILBB	109.50 MHz	18 nm	-	-	3,257 ft
				33 km	-		3,257 m
17R	LOC-ILS	ILBB	109.50 MHz	18 nm	179.66	-	3,282 ft
				33 km	174.20		3,282 m
26	LOC-ILS	ILDT	111.90 MHz	18 nm	269.66	-	3,282 ft
				33 km	264.20		3,282 m
17R	GS	ILBB	109.50 MHz	10 nm	179.66	3.00	3,282 ft
				19 km	174.20		3,282 m
26	GS	ILDT	111.90 MHz	10 nm	269.66	3.00	3,282 ft
				19 km	264.20		3,282 m

KSWO

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 1,000 ft / 305 m
Location: 36.161200 -97.085700
Magnetic Var: 2.768 E

METAR

KSWO 290053Z 36003KT 10SM CLR 24/19 A3007 RMK A02 SLP171 T02390189

TAF

TAF KSWO 282320Z 2900/2924 11008KT P6SM SCT060 BKN120 FM291200 10011KT P6SM SCT040 BKN100 PROB30 2912/2918 4SM -T

Frequencies

REC - 135.72 MHz - ASOS
COM - 125.35 MHz - CTAF/UNICOM
TWR - 125.35 MHz -
COM - 122.70 MHz - CTAF/UNICOM
GND - 121.60 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17	100 ft	7,416 ft	179.50	ASPHALT	0 ft	0 ft
	30 m	2,260 m	176.73		0 m	0 m
35	100 ft	7,416 ft	359.50	ASPHALT	0 ft	0 ft
	30 m	2,260 m	356.73		0 m	0 m
13	150 ft	5,007 ft	134.79	CONCRETE	0 ft	0 ft
	46 m	1,526 m	132.02		0 m	0 m
31	150 ft	5,007 ft	314.80	CONCRETE	0 ft	0 ft
	46 m	1,526 m	312.03		0 m	0 m
04	75 ft	5,003 ft	44.37	ASPHALT	0 ft	0 ft
	23 m	1,525 m	41.60		0 m	0 m
22	75 ft	5,003 ft	224.38	ASPHALT	0 ft	0 ft
	23 m	1,525 m	221.61		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17	DME	ISWO	109.15 MHz	18 nm	-	-	986 ft
				33 km	-		986 m
17	LOC-ILS	ISWO	109.15 MHz	18 nm	179.50	-	1,000 ft
				33 km	176.73		1,000 m
17	GS	ISWO	109.15 MHz	10 nm	179.99	3.00	984 ft
				19 km	177.22		984 m