

# KDFW

Dallas Fort Worth Intl


# KLAX

Los Angeles Intl

2024/05/13 0254Z

KDFW POSTE **V278** TXO **J74** SJN **J231** NABOB **J74** PKE **J104** TNP **V264** YUCCA KLAX

1082.67 nm / 2005.10 km

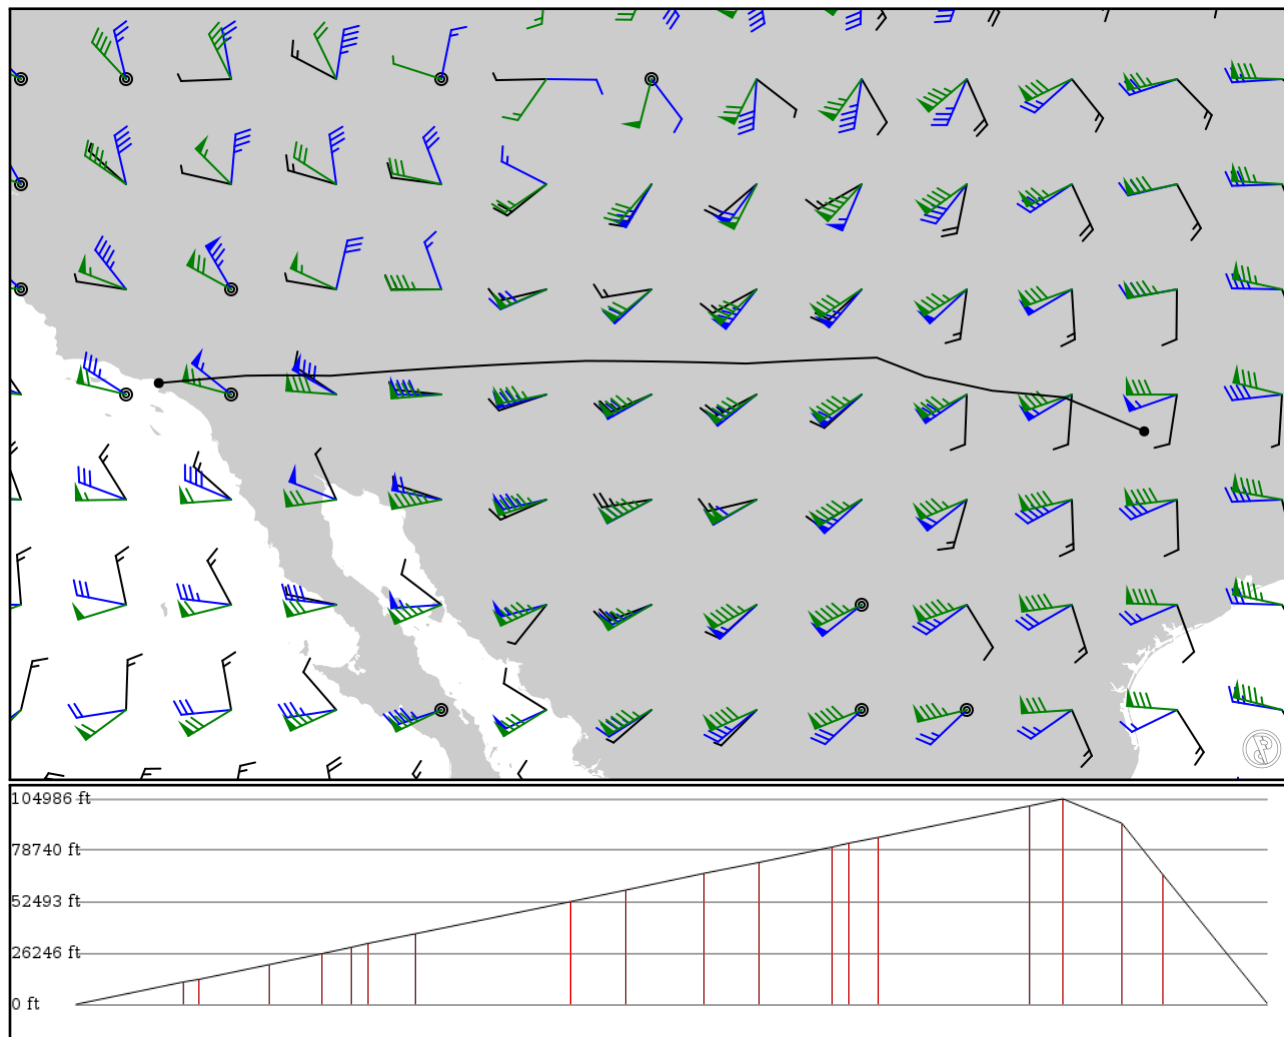

## Notes

Basic altitude profile:

- Ascent Rate: 250ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDFW APT	-	32.89720 -97.03770	0 ft 0 m	-	Dallas Fort Worth Intl
POSTE FIX	-	33.63460 -98.78120	3,500 ft 1,067 m	98	-
NIFDE FIX	V278 AWY-LO	33.66140 -99.05660	3,900 ft 1,189 m	13	-
GTH DME	V278 AWY-LO	33.77830 -100.33600	6,200 ft 1,890 m	64	GUTHRIE VORTAC
FLOYD FIX	V278 AWY-LO	33.97620 -101.26000	7,900 ft 2,408 m	47	-
PVW VOR	V278 AWY-LO	34.08620 -101.79000	8,900 ft 2,713 m	27	PLAINVIEW
HURIK FIX	V278 AWY-LO	34.19350 -102.06200	9,500 ft 2,896 m	14	-
TXO VOR	V278 AWY-LO	34.49510 -102.84000	11,000 ft 3,353 m	42	TEXICO
CNX VOR	J74 AWY-HI	34.36700 -105.67800	16,000 ft 4,877 m	140	CORONA
MAXXO FIX	J74 AWY-HI	34.39400 -106.69700	17,800 ft 5,425 m	50	-
DRYHT FIX	J74 AWY-HI	34.41760 -108.13600	20,400 ft 6,218 m	71	-
SJN VOR	J74 AWY-HI	34.42400 -109.14400	22,100 ft 6,736 m	49	ST JOHNS
CHEAR FIX	J231 AWY-HI	34.36990 -110.47100	24,500 ft 7,468 m	65	-
PAYSO FIX	J231 AWY-HI	34.35450 -110.79500	25,100 ft 7,650 m	16	-
NABOB FIX	J231 AWY-HI	34.32790 -111.31500	26,000 ft 7,925 m	25	-
NICKT FIX	J74 AWY-HI	34.14890 -114.08200	30,900 ft 9,418 m	137	-
PKE VOR	J74 AWY-HI	34.10200 -114.68200	32,000 ft 9,754 m	29	PARKER
TNP VOR	J104 AWY-HI	34.11220 -115.77000	28,200 ft 8,595 m	54	TWENTYNINE PALMS
YUCCA FIX	V264 AWY-LO	34.10350 -116.52100	20,200 ft 6,157 m	37	-
KLAX APT	-	33.94310 -118.40900	0 ft 0 m	94	Los Angeles Intl

## KDFW

Region: UNITED STATES  
Timezone: AMERICA/CHICAGO  
Runways: 7

Elevation: 604 ft / 184 m  
Location: 32.897200 -97.037700  
Magnetic Var: 2.730 E

## METAR

KDFW 130153Z 10006KT 10SM SCT009 BKN014 OVC055 19/18 A2978 RMK A02 RAE0054 SLP079 P0000 T01890183

## TAF

TAF KDFW 122338Z 1300/1406 09009KT P6SM -RA OVC006 FM130500 13008KT 5SM BR VCSH OVC005 TEMPO 1308/1312 2SM BR OVC005

## Frequencies

REC - 123.77 MHz - ATIS ARRIVAL  
COM - 122.95 MHz - UNICOM  
GND - 121.65 MHz - RGNL GND EAST 1  
GND - 121.85 MHz - RGNL GND WEST  
TWR - 127.50 MHz - RGNL TWR EAST 2  
TWR - 124.15 MHz - RGNL TWR WEST 2  
APP - 133.52 MHz - RGNL APP EAST 3  
APP - 119.87 MHz - RGNL APP WEST 2  
DEP - 124.82 MHz - RGNL DEP NORTH 1  
DEP - 126.47 MHz - RGNL DEP WEST 1

REC - 135.92 MHz - ATIS DEPARTURE  
CLD - 128.25 MHz - CLNC DEL  
GND - 121.80 MHz - RGNL GND EAST 2  
TWR - 126.55 MHz - RGNL TWR EAST 1  
TWR - 134.90 MHz - RGNL TWR WEST 1  
APP - 125.02 MHz - RGNL APP EAST 1  
APP - 133.62 MHz - RGNL APP WEST 1  
DEP - 118.55 MHz - RGNL DEP EAST 1  
DEP - 125.12 MHz - RGNL DEP SOUTH 1

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17C	151 ft	13,440 ft	180.26	CONCRETE	0 ft	413 ft
	46 m	4,097 m	177.53		0 m	126 m
35C	151 ft	13,440 ft	0.26	CONCRETE	0 ft	299 ft
	46 m	4,097 m	357.53		0 m	91 m
17L	151 ft	8,523 ft	180.25	CONCRETE	0 ft	400 ft
	46 m	2,598 m	177.52		0 m	122 m
35R	151 ft	8,523 ft	0.25	CONCRETE	0 ft	407 ft
	46 m	2,598 m	357.52		0 m	124 m
18R	151 ft	13,439 ft	180.25	CONCRETE	0 ft	404 ft
	46 m	4,096 m	177.52		0 m	123 m
36L	151 ft	13,439 ft	0.25	CONCRETE	0 ft	299 ft
	46 m	4,096 m	357.52		0 m	91 m
17R	200 ft	13,439 ft	180.26	CONCRETE	0 ft	400 ft
	61 m	4,096 m	177.53		0 m	122 m
35L	200 ft	13,439 ft	0.26	CONCRETE	0 ft	400 ft
	61 m	4,096 m	357.53		0 m	122 m
18L	200 ft	13,439 ft	180.25	CONCRETE	0 ft	404 ft
	61 m	4,096 m	177.52		0 m	123 m
36R	200 ft	13,439 ft	0.25	CONCRETE	0 ft	394 ft
	61 m	4,096 m	357.52		0 m	120 m
13R	151 ft	9,309 ft	139.18	CONCRETE	0 ft	397 ft
	46 m	2,837 m	136.45		0 m	121 m
31L	151 ft	9,309 ft	319.19	CONCRETE	0 ft	400 ft
	46 m	2,837 m	316.46		0 m	122 m
13L	200 ft	9,010 ft	135.41	CONCRETE	630 ft	299 ft
	61 m	2,746 m	132.68		192 m	91 m
31R	200 ft	9,010 ft	315.42	CONCRETE	0 ft	299 ft
	61 m	2,746 m	312.69		0 m	91 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13R	DME	ILWN	109.50 MHz	18 nm	-	-	590 ft
				33 km	-		590 m
17C	DME	IFLQ	110.30 MHz	18 nm	-	-	575 ft
				33 km	-		575 m
17L	DME	IPPZ	111.75 MHz	18 nm	-	-	603 ft
				33 km	-		603 m
17R	DME	IJHZ	111.35 MHz	18 nm	-	-	607 ft
				33 km	-		607 m
18L	DME	ICIX	110.55 MHz	18 nm	-	-	607 ft
				33 km	-		607 m
18R	DME	IVYN	111.90 MHz	18 nm	-	-	584 ft
				33 km	-		584 m
31R	DME	IRRA	110.90 MHz	18 nm	-	-	548 ft
				33 km	-		548 m
35C	DME	IPKQ	110.30 MHz	18 nm	-	-	603 ft
				33 km	-		603 m
35L	DME	IUWX	111.35 MHz	18 nm	-	-	607 ft
				33 km	-		607 m
35R	DME	IAJQ	111.75 MHz	18 nm	-	-	603 ft
				33 km	-		603 m
36L	DME	IBXN	111.90 MHz	18 nm	-	-	584 ft
				33 km	-		584 m
36R	DME	IFJN	110.55 MHz	18 nm	-	-	607 ft
				33 km	-		607 m
13R	LOC-ILS	ILWN	109.50 MHz	18 nm	139.19	-	577 ft
				33 km	136.45		577 m
17C	LOC-ILS	IFLQ	110.30 MHz	18 nm	180.26	-	563 ft
				33 km	177.53		563 m
17L	LOC-ILS	IPPZ	111.75 MHz	18 nm	180.27	-	570 ft
				33 km	177.54		570 m
17R	LOC-ILS	IJHZ	111.35 MHz	18 nm	180.26	-	558 ft
				33 km	177.53		558 m
18L	LOC-ILS	ICIX	110.55 MHz	18 nm	180.25	-	570 ft
				33 km	177.52		570 m
18R	LOC-ILS	IVYN	111.90 MHz	18 nm	180.25	-	580 ft
				33 km	177.52		580 m
31R	LOC-ILS	IRRA	110.90 MHz	18 nm	315.40	-	552 ft
				33 km	312.67		552 m
35C	LOC-ILS	IPKQ	110.30 MHz	18 nm	0.26	-	558 ft
				33 km	357.53		558 m
35L	LOC-ILS	IUWX	111.35 MHz	18 nm	0.26	-	607 ft
				33 km	357.53		607 m
35R	LOC-ILS	IAJQ	111.75 MHz	18 nm	0.27	-	607 ft
				33 km	357.54		607 m
36L	LOC-ILS	IBXN	111.90 MHz	18 nm	0.25	-	598 ft
				33 km	357.52		598 m
36R	LOC-ILS	IFJN	110.55 MHz	18 nm	0.25	-	595 ft
				33 km	357.52		595 m
13R	GS	ILWN	109.50 MHz	10 nm	139.37	3.00	589 ft
				19 km	136.64		589 m
17C	GS	IFLQ	110.30 MHz	10 nm	180.53	3.00	562 ft
				19 km	177.80		562 m
17L	GS	IPPZ	111.75 MHz	10 nm	180.54	3.00	532 ft
				19 km	177.81		532 m
17R	GS	IJHZ	111.35 MHz	10 nm	180.52	3.00	567 ft
				19 km	177.79		567 m
18L	GS	ICIX	110.55 MHz	10 nm	180.49	3.00	594 ft
				19 km	177.76		594 m
18R	GS	IVYN	111.90 MHz	10 nm	180.50	3.00	601 ft
				19 km	177.77		601 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	177.77		601 m
31R	GS	IRRA	110.90 MHz	10 nm	315.80	3.00	513 ft
				19 km	313.07		513 m
35C	GS	IPKQ	110.30 MHz	10 nm	0.52	3.00	563 ft
				19 km	357.79		563 m
35L	GS	IUWX	111.35 MHz	10 nm	0.52	3.00	564 ft
				19 km	357.79		564 m
35R	GS	IAJQ	111.75 MHz	10 nm	0.54	3.00	565 ft
				19 km	357.81		565 m
36L	GS	IBXN	111.90 MHz	10 nm	0.50	3.00	584 ft
				19 km	357.77		584 m
36R	GS	IFJN	110.55 MHz	10 nm	0.49	3.00	577 ft
				19 km	357.76		577 m

## KLAX

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 4

Elevation: 125 ft / 38 m  
Location: 33.943100 -118.409000  
Magnetic Var: 11.440 E

## METAR

KLAX 130153Z 26009KT 8SM OVC007 15/12 A2990 RMK A02 SLP122 T01500122 \$

## TAF

TAF AMD KLAX 130045Z 1301/1406 26011KT P6SM OVC008 FM130300 26006KT P6SM OVC008 FM131000 VRB03KT P6SM OVC012 FM131300 26006KT P6SM OVC012

## Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m