

# PHNL

Daniel K. Inouye International Airport


# PLCH

Cassidy Intl

2024/06/07 0517Z

PHNL JORDA DOVRR **B596** RAYOR PLCH

1235.82 nm / 2288.73 km

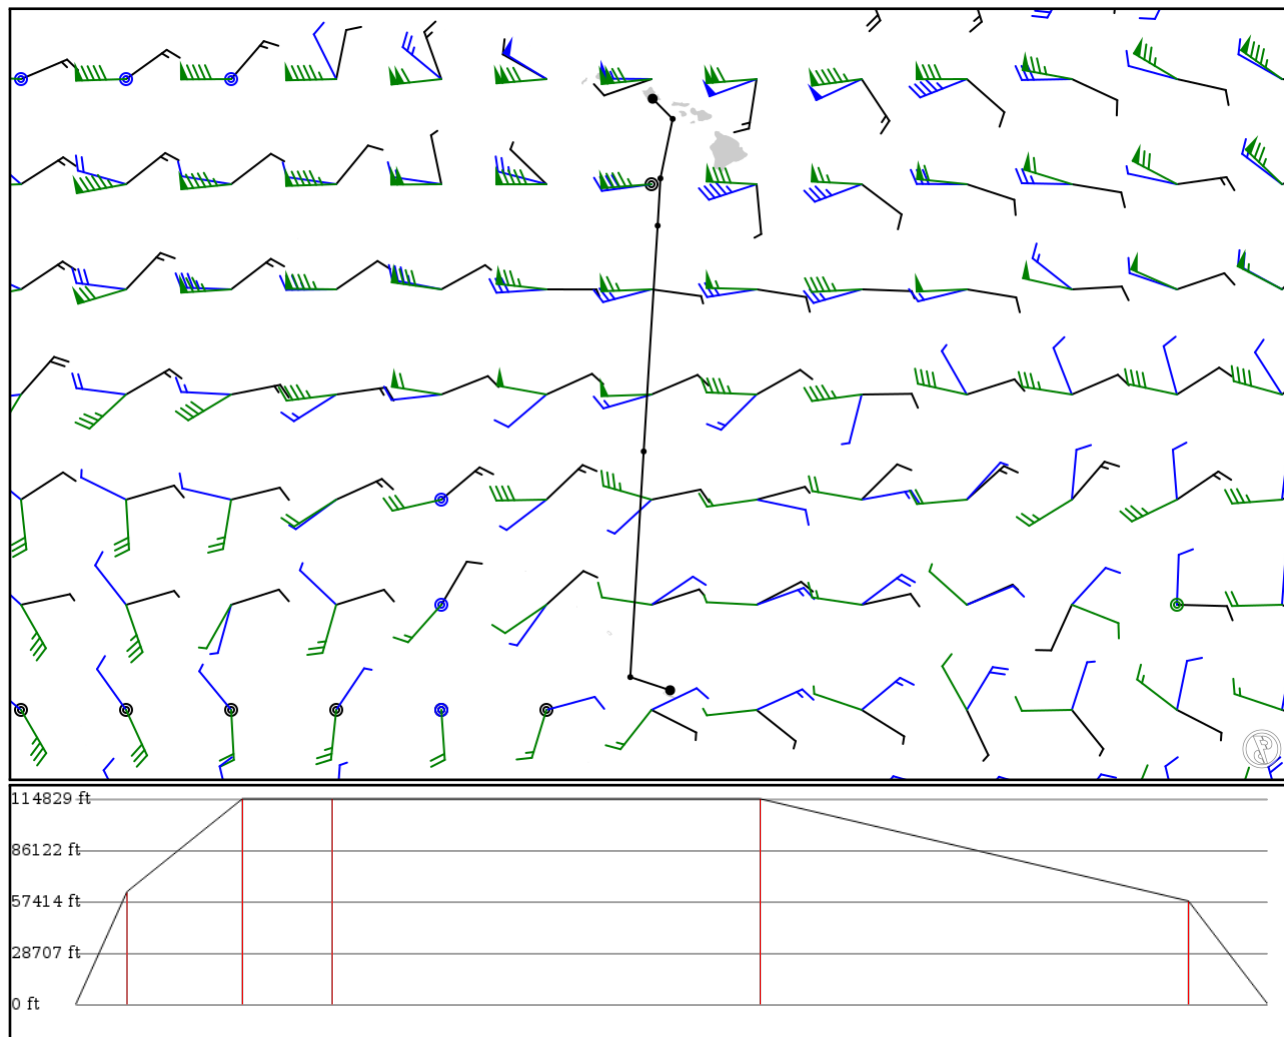

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
PHNL APT	-	21.31940 -157.92100	0 ft 0 m	-		Daniel K. Inouye International Airport
JORDA FIX	-	20.65960 -157.26600	19,200 ft 5,852 m	54	-	
DOVRR FIX	-	18.71670 -157.66700	35,000 ft 10,668 m	118	-	
RUDEE FIX	B596 AWY-HI	17.17060 -157.75700	35,000 ft 10,668 m	92	-	
RAGDE FIX	B596 AWY-HI	9.79222 -158.21400	35,000 ft 10,668 m	443	-	
RAYOR FIX	B596 AWY-HI	2.41750 -158.65200	17,600 ft 5,364 m	443	-	
PLCH APT	-	1.98626 -157.35000	0 ft 0 m	82		Cassidy Intl

## PHNL

Region: USA (HAWAII)  
Timezone: PACIFIC/HONOLULU  
Runways: 4

Elevation: 13 ft / 4 m  
Location: 21.319400 -157.921000  
Magnetic Var: 9.256 E

## METAR

PHNL 070453Z 17005KT 10SM SCT028 BKN037 BKN055 27/21 A3002

## TAF

PHNL 070306Z 0703/0806 20011KT P6SM FEW025 SCT040 FM070600 VRB05KT P6SM FEW025 SCT040 FM072000 12010KT P6SM FEW02

## Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.59		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.76		0 m	212 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m