

KEDW

Edwards AFB Rogers Dry Lake


KNYL

Yuma MCAS

2024/05/02 2332Z

KEDW PSP V137 TRM KNYL

211.96 nm / 392.56 km

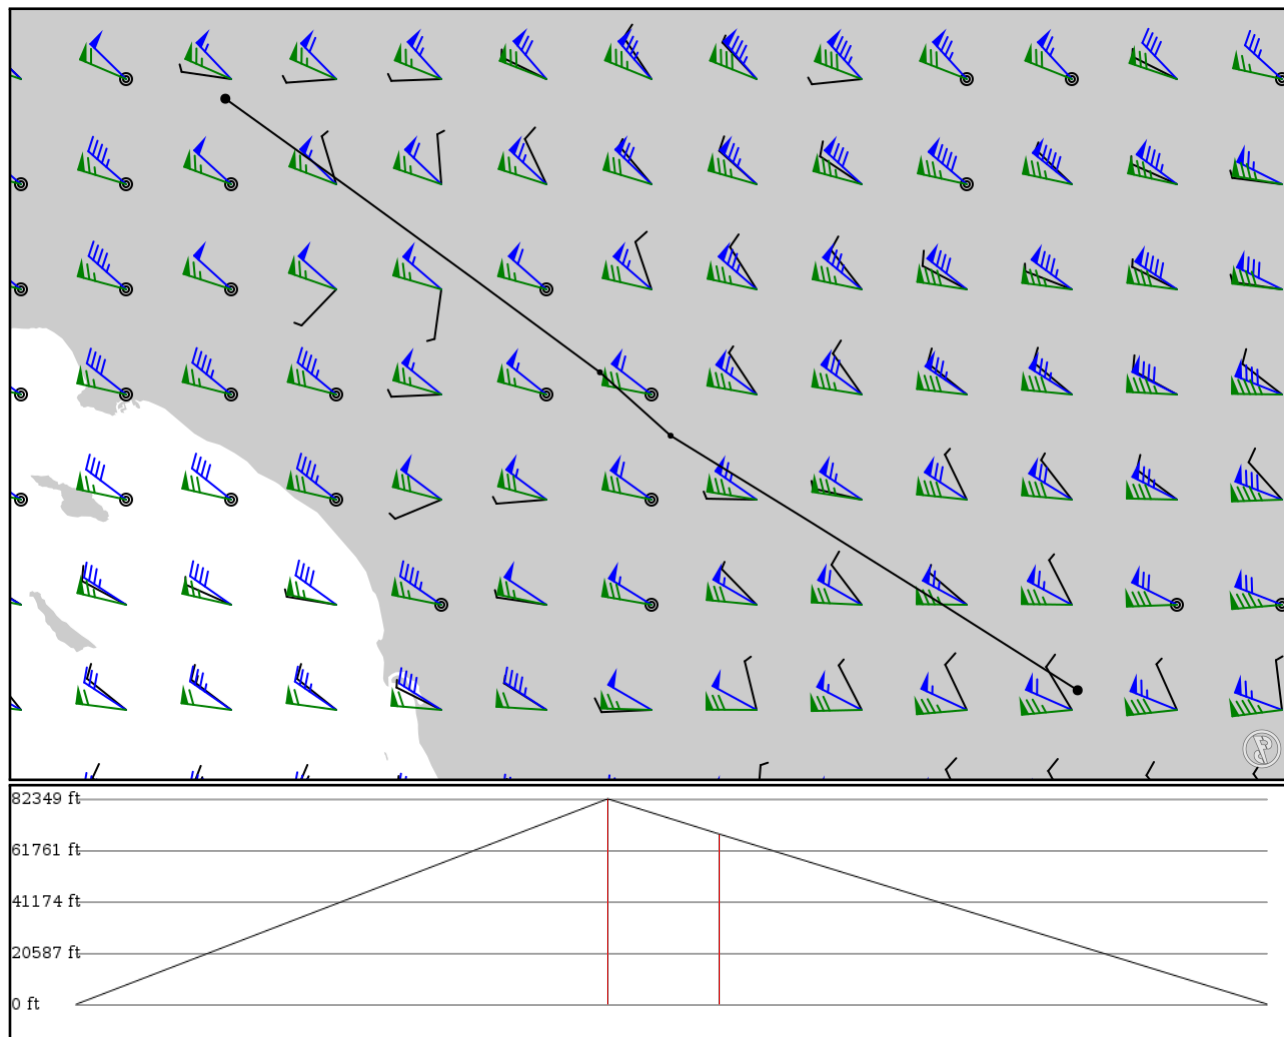

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KEDW APT	-	34.91400 -117.86000	0 ft 0 m	-	Edwards AFB Rogers Dry Lake
PSP VOR	-	33.87000 -116.43000	25,100 ft 7,650 m	94	PALM SPRINGS
TRM VOR	V137 AWY-LO	33.62810 -116.16000	20,800 ft 6,340 m	19	THERMAL
KNYL APT	-	32.65660 -114.60600	0 ft 0 m	97	Yuma MCAS

KEDW

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 14

Elevation: 2,300 ft / 701 m
Location: 34.914000 -117.860000
Magnetic Var: 11.504 E

METAR

KEDW 022322Z 28015G21KT 250V340 50SM FEW040 FEW200 28/M06 A2980 RMK A02A

TAF

TAF KEDW 022044Z 0221/0403 VRB06KT 9999 FEW200 QNH2983INS BECMG 0221/0222 26012KT 9999 FEW200 QNH2982INS BECMG 02

Frequencies

REC - 149.87 MHz - ATIS
TWR - 120.70 MHz -

GND - 121.80 MHz -
APP - 132.75 MHz - SPORT APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04C	300 ft	9,597 ft	58.11	LAKEBED	0 ft	0 ft
	91 m	2,925 m	46.61		0 m	0 m
22C	300 ft	9,597 ft	238.13	LAKEBED	0 ft	0 ft
	91 m	2,925 m	226.62		0 m	0 m
04L	142 ft	11,980 ft	58.11	ASPHALT	0 ft	1,010 ft
	43 m	3,652 m	46.61		0 m	308 m
22R	142 ft	11,980 ft	238.13	ASPHALT	0 ft	1,001 ft
	43 m	3,652 m	226.62		0 m	305 m
04R	300 ft	15,003 ft	58.10	ASPHALT	0 ft	1,001 ft
	91 m	4,573 m	46.60		0 m	305 m
22L	300 ft	15,003 ft	238.13	ASPHALT	0 ft	1,781 ft
	91 m	4,573 m	226.62		0 m	543 m
05L	300 ft	22,143 ft	64.27	LAKEBED	0 ft	0 ft
	91 m	6,749 m	52.77		0 m	0 m
23R	300 ft	22,143 ft	244.31	LAKEBED	0 ft	0 ft
	91 m	6,749 m	232.81		0 m	0 m
05R	300 ft	14,948 ft	64.29	LAKEBED	0 ft	0 ft
	91 m	4,556 m	52.78		0 m	0 m
23L	300 ft	14,948 ft	244.31	LAKEBED	0 ft	0 ft
	91 m	4,556 m	232.81		0 m	0 m
06R	99 ft	6,979 ft	77.25	ASPHALT	0 ft	1,201 ft
	30 m	2,127 m	65.75		0 m	366 m
24L	99 ft	6,979 ft	257.27	ASPHALT	0 ft	0 ft
	30 m	2,127 m	245.76		0 m	0 m
06C	210 ft	10,168 ft	77.25	LAKEBED	0 ft	0 ft
	64 m	3,099 m	65.75		0 m	0 m
24C	210 ft	10,168 ft	257.27	LAKEBED	0 ft	0 ft
	64 m	3,099 m	245.76		0 m	0 m
03	300 ft	7,185 ft	58.10	LAKEBED	0 ft	0 ft
	91 m	2,190 m	46.60		0 m	0 m
21	300 ft	7,185 ft	238.12	LAKEBED	0 ft	0 ft
	91 m	2,190 m	226.61		0 m	0 m
17	900 ft	39,133 ft	191.21	LAKEBED	0 ft	0 ft
	274 m	11,928 m	179.70		0 m	0 m
35	900 ft	39,133 ft	11.19	LAKEBED	0 ft	0 ft
	274 m	11,928 m	359.69		0 m	0 m
15	300 ft	29,587 ft	167.64	LAKEBED	0 ft	2,349 ft
	91 m	9,018 m	156.13		0 m	716 m

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
33	300 ft	29,587 ft	347.65	LAKEBED	0 ft	0 ft
	91 m	9,018 m	336.14		0 m	0 m
07	300 ft	23,122 ft	83.88	LAKEBED	0 ft	0 ft
	91 m	7,048 m	72.37		0 m	0 m
25	300 ft	23,122 ft	263.92	LAKEBED	0 ft	0 ft
	91 m	7,048 m	252.42		0 m	0 m
18	900 ft	23,176 ft	199.15	LAKEBED	0 ft	0 ft
	274 m	7,064 m	187.65		0 m	0 m
36	900 ft	23,176 ft	19.14	LAKEBED	0 ft	0 ft
	274 m	7,064 m	7.63		0 m	0 m
09	300 ft	9,999 ft	109.89	LAKEBED	0 ft	0 ft
	91 m	3,048 m	98.39		0 m	0 m
27	300 ft	9,999 ft	289.91	LAKEBED	0 ft	0 ft
	91 m	3,048 m	278.40		0 m	0 m
12	600 ft	9,235 ft	135.61	LAKEBED	0 ft	0 ft
	183 m	2,815 m	124.11		0 m	0 m
30	600 ft	9,235 ft	315.62	LAKEBED	0 ft	0 ft
	183 m	2,815 m	304.12		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	LOC-ILS	IEDW	110.10 MHz	18 nm	238.12	-	2,300 ft
				33 km	226.62		2,300 m
22L	GS	IEDW	110.10 MHz	10 nm	238.12	2.50	2,300 ft
				19 km	226.62		2,300 m

KNYL

Region: UNITED STATES
Timezone: AMERICA/PHOENIX
Runways: 4

Elevation: 211 ft / 64 m
Location: 32.656600 -114.606000
Magnetic Var: 10.346 E

METAR

KNYL 022257Z 20009G15KT 7SM CLR 32/07 A2971 RMK A02 SLP059 T03220067

TAF

TAF KNYL 0221/0321 20010KT 9999 SKC QNH2967INS BECMG 0305/0307 16005KT 9999 SKC QNH2970INS FM031600 18011KT 9999 S

Frequencies

COM - 122.95 MHz - UNICOM	REC - 118.80 MHz - ATIS
APP - 120.70 MHz - PMSV METRO	APP - 120.72 MHz - PMSV METRO
APP - 132.05 MHz - RADAR	APP - 124.70 MHz - VFR ADZY
APP - 124.70 MHz - YUMA APPROACH	GND - 118.00 MHz - YUMA CLEARANCE DELIVERY
DEP - 125.55 MHz - YUMA DEPARTURE	GND - 121.90 MHz - GROUND
TWR - 119.30 MHz - TOWER	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03L	200 ft	13,310 ft	43.97	CONCRETE	0 ft	1,001 ft
	61 m	4,057 m	33.63		0 m	305 m
21R	200 ft	13,310 ft	223.99	CONCRETE	0 ft	1,001 ft
	61 m	4,057 m	213.64		0 m	305 m
03R	151 ft	9,244 ft	44.00	ASPHALT	0 ft	965 ft
	46 m	2,818 m	33.65		0 m	294 m
21L	151 ft	9,244 ft	224.01	ASPHALT	0 ft	971 ft
	46 m	2,818 m	213.66		0 m	296 m
08	150 ft	6,135 ft	89.11	ASPHALT	0 ft	246 ft
	46 m	1,870 m	78.77		0 m	75 m
26	150 ft	6,135 ft	269.13	ASPHALT	0 ft	1,027 ft
	46 m	1,870 m	258.78		0 m	313 m
17	150 ft	5,726 ft	179.11	ASPHALT	0 ft	180 ft
	46 m	1,745 m	168.76		0 m	55 m
35	150 ft	5,726 ft	359.11	ASPHALT	0 ft	768 ft
	46 m	1,745 m	348.76		0 m	234 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
21R	LOC-ILS	IYUM	108.30 MHz	18 nm	223.98	-	211 ft
				33 km	213.63		211 m
21R	GS	IYUM	108.30 MHz	10 nm	223.98	3.00	211 ft
				19 km	213.63		211 m