

LIRF

Roma Fiumicino Leonardo Da Vinci


LICJ

PALERMO

2024/05/10 0500Z

LIRF ROTUN M727 CORAD LICJ

224.02 nm / 414.88 km

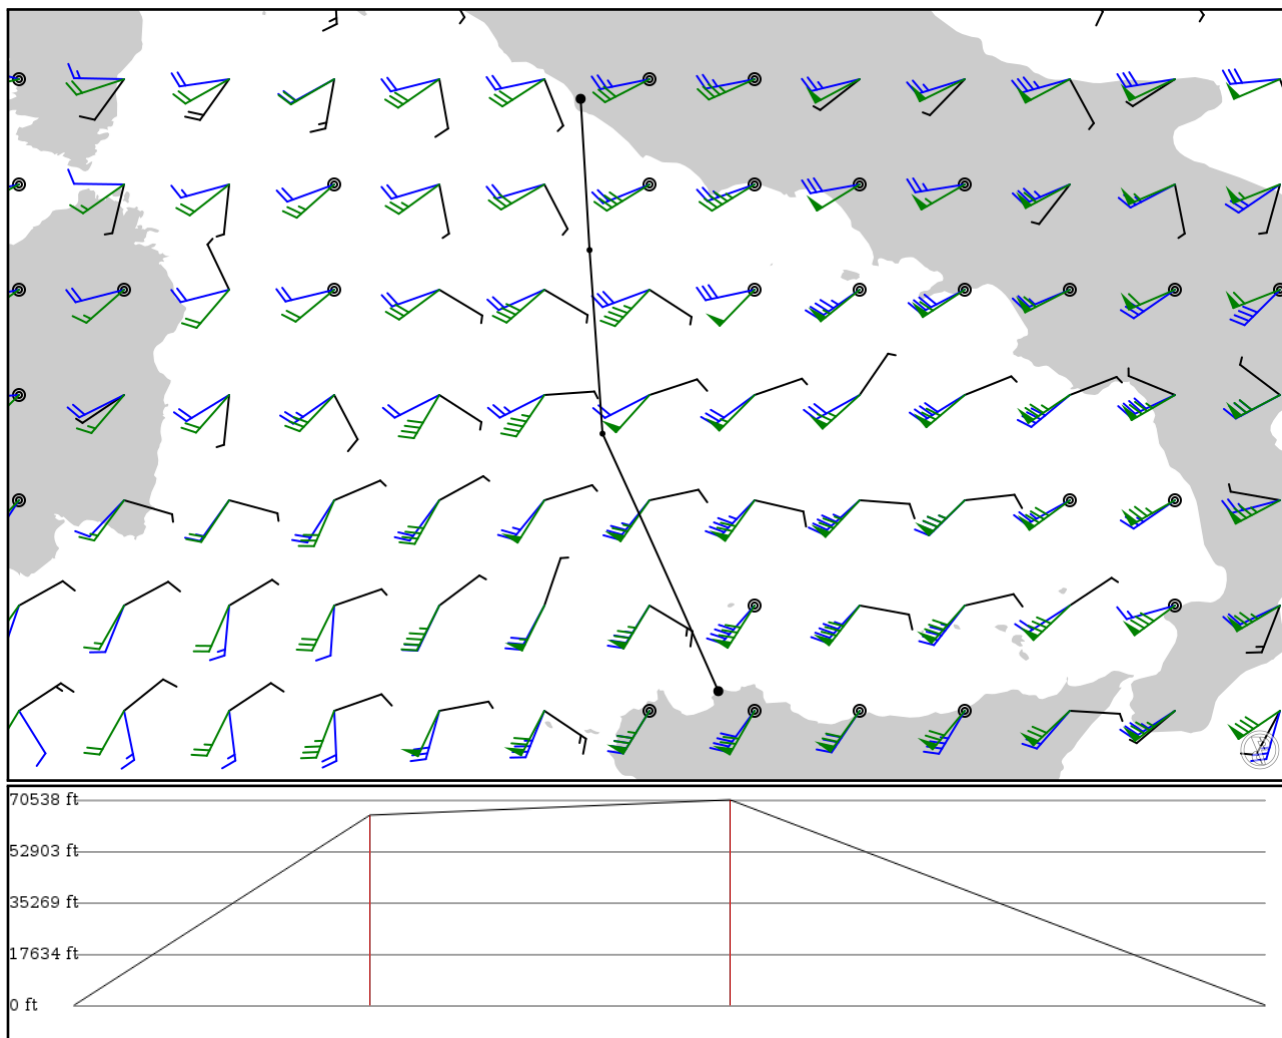

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 30000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIRF APT	-	41.81081 12.25090	0 ft 0 m	-	Roma Fiumicino Leonardo Da Vinci
ROTUN FIX	-	40.88333 12.30556	19,900 ft 6,066 m	55	-
CORAD FIX	M727 AWY-LO	39.75694 12.38528	21,500 ft 6,553 m	67	-
LICJ APT	-	38.17738 13.09704	0 ft 0 m	100	PALERMO

LIRF

Region: ITALY
Timezone: EUROPE/ROME
Runways: 3

Elevation: 13 ft / 4 m
Location: 41.810800 12.250900
Magnetic Var: 3.665 E

METAR

LIRF 100420Z 06005KT CAVOK 14/10 Q1015 NOSIG

TAF

TAF LIRF 092300Z 1000/1106 03008KT 9999 FEW020 BECMG 1009/1011 26012KT BECMG 1017/1019 03006KT

Frequencies

REC - 120.17 MHz - ATIS ARRIVAL	REC - 126.12 MHz - ATIS ARRIVAL
REC - 121.85 MHz - ATIS DEPARTURE	CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.72 MHz - FIUME APRON	GND - 121.67 MHz - FIUME GROUND
GND - 121.90 MHz - FIUME GROUND	GND - 122.12 MHz - FIUME GROUND
TWR - 127.62 MHz - FIUME TOWER	TWR - 123.72 MHz - FIUME TOWER
TWR - 118.70 MHz - FIUME TOWER	DEP - 130.90 MHz - ROMA DEPARTURE
DEP - 131.10 MHz - ROMA DEPARTURE	APP - 127.95 MHz - ROMA ARRIVAL
APP - 125.50 MHz - ROMA ARRIVAL	APP - 119.20 MHz - ROMA DIRECT
APP - 131.25 MHz - ROMA DIRECT	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	10,859 ft	69.68	ASPHALT	1,348 ft	0 ft
	45 m	3,310 m	66.02		411 m	0 m
25	148 ft	10,859 ft	249.71	ASPHALT	0 ft	0 ft
	45 m	3,310 m	246.04		0 m	0 m
16R	197 ft	12,814 ft	162.66	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.00		0 m	0 m
34L	197 ft	12,814 ft	342.67	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.01		0 m	0 m
16L	197 ft	12,814 ft	162.68	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.01		0 m	0 m
34R	197 ft	12,814 ft	342.69	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.02		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	FEE	110.15 MHz	25 nm	-	-	25 ft
				46 km	-		25 m
34L	DME	ISW	108.90 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
34R	DME	FSS	111.55 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
16L	LOC-ILS	IFLL	108.10 MHz	18 nm	162.69	-	13 ft
				33 km	159.02		13 m
16R	LOC-ILS	IFRR	109.75 MHz	18 nm	162.67	-	13 ft
				33 km	159.00		13 m
25	LOC-ILS	FEE	110.15 MHz	18 nm	249.69	-	13 ft
				33 km	246.02		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34L	LOC-ILS	IFSW	108.90 MHz	18 nm	342.67	-	13 ft
				33 km	339.00		13 m
34R	LOC-ILS	FSS	111.55 MHz	18 nm	342.69	-	13 ft
				33 km	339.02		13 m
16L	GS	IFLL	108.10 MHz	10 nm	162.69	3.00	13 ft
				19 km	159.02		13 m
16R	GS	IFRR	109.75 MHz	10 nm	162.67	3.00	13 ft
				19 km	159.00		13 m
25	GS	FEE	110.15 MHz	10 nm	249.69	3.00	13 ft
				19 km	246.02		13 m
34L	GS	IFSW	108.90 MHz	10 nm	342.67	3.00	13 ft
				19 km	339.00		13 m
34R	GS	FSS	111.55 MHz	10 nm	342.69	3.00	13 ft
				19 km	339.02		13 m

LICJ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 63 ft / 19 m
Location: 38.177500 13.097200
Magnetic Var: 3.574 E

METAR

LICJ 100420Z 17004KT 9999 FEW006 SCT010 16/15 Q1014

TAF

TAF LICJ 092300Z 1000/1024 VRB05KT 9999 FEW010 SCT040 BECMG 1010/1012 05012KT BECMG 1016/1018 VRB05KT

Frequencies

GND - 121.62 MHz - RAISI GROUND
APP - 120.20 MHz - PALERMO APPROACH
REC - 123.87 MHz - ATIS

TWR - 119.05 MHz - RAISI TOWER
APP - 118.65 MHz - PALERMO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	6,791 ft	23.79	ASPHALT	0 ft	0 ft
	45 m	2,070 m	20.22		0 m	0 m
20	148 ft	6,791 ft	203.80	ASPHALT	0 ft	0 ft
	45 m	2,070 m	200.23		0 m	0 m
07	197 ft	10,922 ft	66.82	ASPHALT	404 ft	577 ft
	60 m	3,329 m	63.25		123 m	176 m
25	197 ft	10,922 ft	246.84	ASPHALT	669 ft	302 ft
	60 m	3,329 m	243.27		204 m	92 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20	DME	ITO	110.55 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
25	DME	RAI	109.50 MHz	18 nm	-	-	65 ft
				33 km	-		65 m
20	LOC-ILS	ITO	110.55 MHz	18 nm	203.92	-	64 ft
				33 km	200.35		64 m
25	LOC-ILS	RAI	109.50 MHz	18 nm	246.80	-	64 ft
				33 km	243.23		64 m
20	GS	ITO	110.55 MHz	10 nm	203.92	3.00	64 ft
				19 km	200.35		64 m
25	GS	RAI	109.50 MHz	10 nm	246.80	3.00	64 ft
				19 km	243.23		64 m