


2024/06/04 1132Z

KMIA FEMSO PATLY SENoy HINKU HITAG IZROZ KAINS ADOTE HETMO SAWGY STARY ILURO H6137 SISIM TULAX
REREK OMDB

7316.14 nm / 13549.50 km

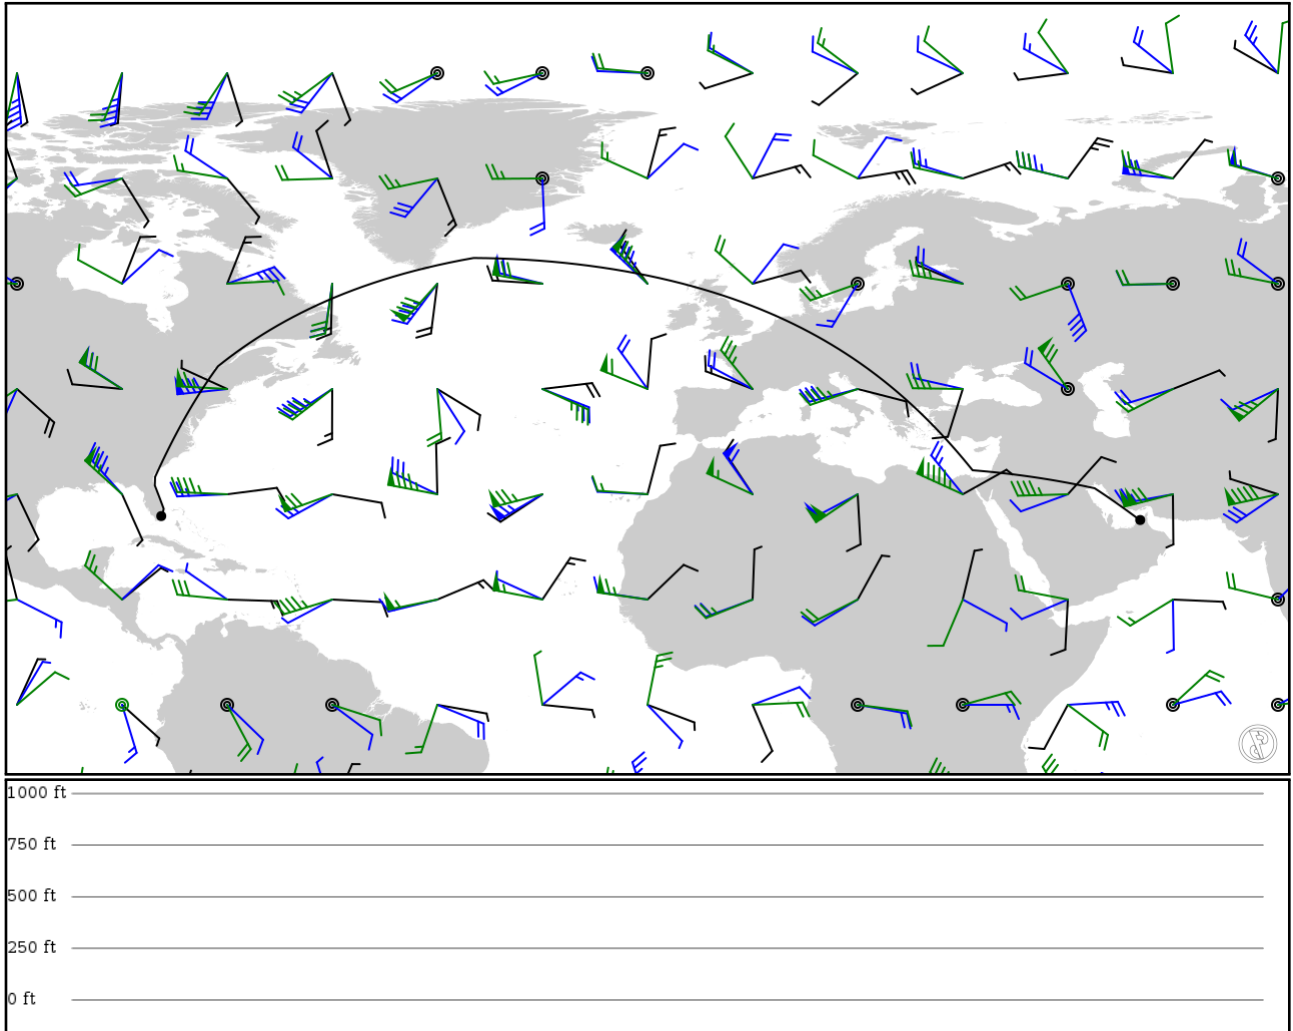

Notes

Requested: KMIA FEMSO PATLY SENoy HINKU HITAG IZROZ KAINS ADOTE HETMO SAWGY STARY ILURO H6137 SISIM TULAX REREK OM

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMIA	-	25.79620	0 ft	-	Miami Intl
APT	-	-80.28970	0 m		
FEMSO	-	25.80290	0 ft	0	-
FIX	-	-80.30150	0 m		
PATLY	-	25.80570	0 ft	3	-
FIX	-	-80.23300	0 m		
SENOY	-	25.80980	0 ft	4	-
FIX	-	-80.15110	0 m		
HINKU	-	25.81110	0 ft	2	-
FIX	-	-80.10110	0 m		
HITAG	-	25.86460	0 ft	4	-
FIX	-	-80.05670	0 m		
IZROZ	-	25.92260	0 ft	3	-
FIX	-	-80.08010	0 m		
KAINS	-	25.96300	0 ft	2	-
FIX	-	-80.09520	0 m		
ADOTE	-	26.07660	0 ft	6	-
FIX	-	-80.10920	0 m		
HETMO	-	26.80290	0 ft	44	-
FIX	-	-79.95320	0 m		
SAWGY	-	30.03660	0 ft	204	-
FIX	-	-81.18640	0 m		
STARY	-	31.20130	0 ft	69	-
FIX	-	-81.14460	0 m		
ILURO	-	46.52370	0 ft	1004	-
FIX	-	-72.42810	0 m		
H6137	-	61.50000	0 ft	1510	-
FIX	-	-37.00000	0 m		
SISIM	-	32.13440	0 ft	3141	-
FIX	-	32.14080	0 m		
TULAX	-	29.64810	0 ft	883	-
FIX	-	49.05030	0 m		
REREK	-	25.39960	0 ft	411	-
FIX	-	55.10640	0 m		
OMDB	-	25.25110	0 ft	16	Dubai Intl
APT	-	55.37110	0 m		

KMIA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 11 ft / 3 m
Location: 25.796200 -80.289700
Magnetic Var: 7.280 W

METAR

KMIA 041053Z 36004KT 10SM FEW030 FEW060 FEW250 25/20 A2991 RMK A02 SLP130 T02500200 \$

TAF

KMIA 040831Z 0409/0512 VRB06KT P6SM FEW030 FEW250 FM041500 08008KT P6SM VCSH SCT030 BKN050 FM041700 09010KT P6SM V

Frequencies

REC - 119.15 MHz - D-ATIS	REC - 133.67 MHz - D-ATIS
COM - 123.00 MHz - UNICOM	CLD - 135.35 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - MIAMI GROUND	GND - 127.50 MHz - MIAMI GROUND
TWR - 118.30 MHz - MIAMI TOWER	TWR - 123.90 MHz - MIAMI TOWER
APP - 120.50 MHz - MIAMI APPROACH	APP - 124.85 MHz - MIAMI APPROACH
APP - 125.75 MHz - MIAMI APPROACH	DEP - 119.45 MHz - MIAMI DEPARTURE
DEP - 125.50 MHz - MIAMI DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.65		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.67		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.66		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.67		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.66		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.67		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.89		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.90		289 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.88		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.88		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.64		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.64		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.88		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.88		4 m

OMDB

Region: UNITED ARAB EMIRATES
Timezone: ASIA/DUBAI
Runways: 2

Elevation: 62 ft / 19 m
Location: 25.251100 55.371100
Magnetic Var: 2.356 E

METAR

OMDB 041100Z 33011KT 290V360 CAVOK 36/25 Q1002 NOSIG

TAF

TAF OMDB 032300Z 0400/0506 VRB02KT 8000 NSC PROB30 0401/0404 4000 HZ BKN008 BECMG 0403/0405 19010KT BECMG 0408/0410 20010KT

Frequencies

REC - 126.27 MHz - ATIS ARRIVAL	REC - 131.70 MHz - ATIS DEPARTURE
TWR - 126.77 MHz - DUBAI TOWER	TWR - 119.55 MHz - DUBAI TOWER
TWR - 118.75 MHz - DUBAI TOWER	TWR - 119.05 MHz - DUBAI TOWER
GND - 118.35 MHz - DUBAI GROUND	GND - 118.85 MHz - DUBAI GROUND
GND - 121.65 MHz - DUBAI GROUND	CLD - 120.35 MHz - CLEARANCE DELIVERY
APP - 122.50 MHz - MINHAD APPROACH	APP - 126.02 MHz - MINHAD APPROACH
APP - 120.25 MHz - DUBAI ARRIVAL	APP - 124.45 MHz - DUBAI ARRIVAL
APP - 124.90 MHz - DUBAI ARRIVAL	DEP - 126.02 MHz - DUBAI DEPARTURE
DEP - 121.02 MHz - DUBAI DEPARTURE	DEP - 126.20 MHz - DUBAI DEPARTURE
DEP - 120.25 MHz - DUBAI DEPARTURE	APP - 120.40 MHz - DUBAI RADAR
APP - 126.02 MHz - DUBAI RADAR	APP - 127.90 MHz - DUBAI DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	200 ft	14,604 ft	121.53	ASPHALT	2,352 ft	771 ft
	61 m	4,452 m	119.17		717 m	235 m
30L	200 ft	14,604 ft	301.54	ASPHALT	436 ft	0 ft
	61 m	4,452 m	299.19		133 m	0 m
12L	200 ft	14,289 ft	121.48	ASPHALT	1,496 ft	381 ft
	61 m	4,355 m	119.13		456 m	116 m
30R	200 ft	14,289 ft	301.50	ASPHALT	991 ft	377 ft
	61 m	4,355 m	299.14		302 m	115 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IDBL	110.10 MHz	18 nm	-	-	62 ft
				33 km	-		62 m
30L	DME	IDBW	111.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
30R	DME	IDBR	110.90 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
12L	LOC-ILS	IDBL	110.10 MHz	18 nm	121.49	-	62 ft
				33 km	119.13		62 m
12R	LOC-ILS	IDBE	109.50 MHz	18 nm	121.54	-	62 ft
				33 km	119.18		62 m
30L	LOC-ILS	IDBW	111.30 MHz	18 nm	301.54	-	62 ft
				33 km	299.18		62 m
30R	LOC-ILS	IDBR	110.90 MHz	18 nm	301.49	-	62 ft
				33 km	299.13		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	GS	IDBL	110.10 MHz	10 nm	121.49	3.00	62 ft
				19 km	119.13		62 m
12R	GS	IDBE	109.50 MHz	10 nm	121.54	3.00	62 ft
				19 km	119.18		62 m
30L	GS	IDBW	111.30 MHz	10 nm	301.54	3.00	62 ft
				19 km	299.18		62 m
30R	GS	IDBR	110.90 MHz	10 nm	301.49	3.00	62 ft
				19 km	299.13		62 m