


2024/05/16 0630Z

KMIA LBV KTPA

177.66 nm / 329.02 km

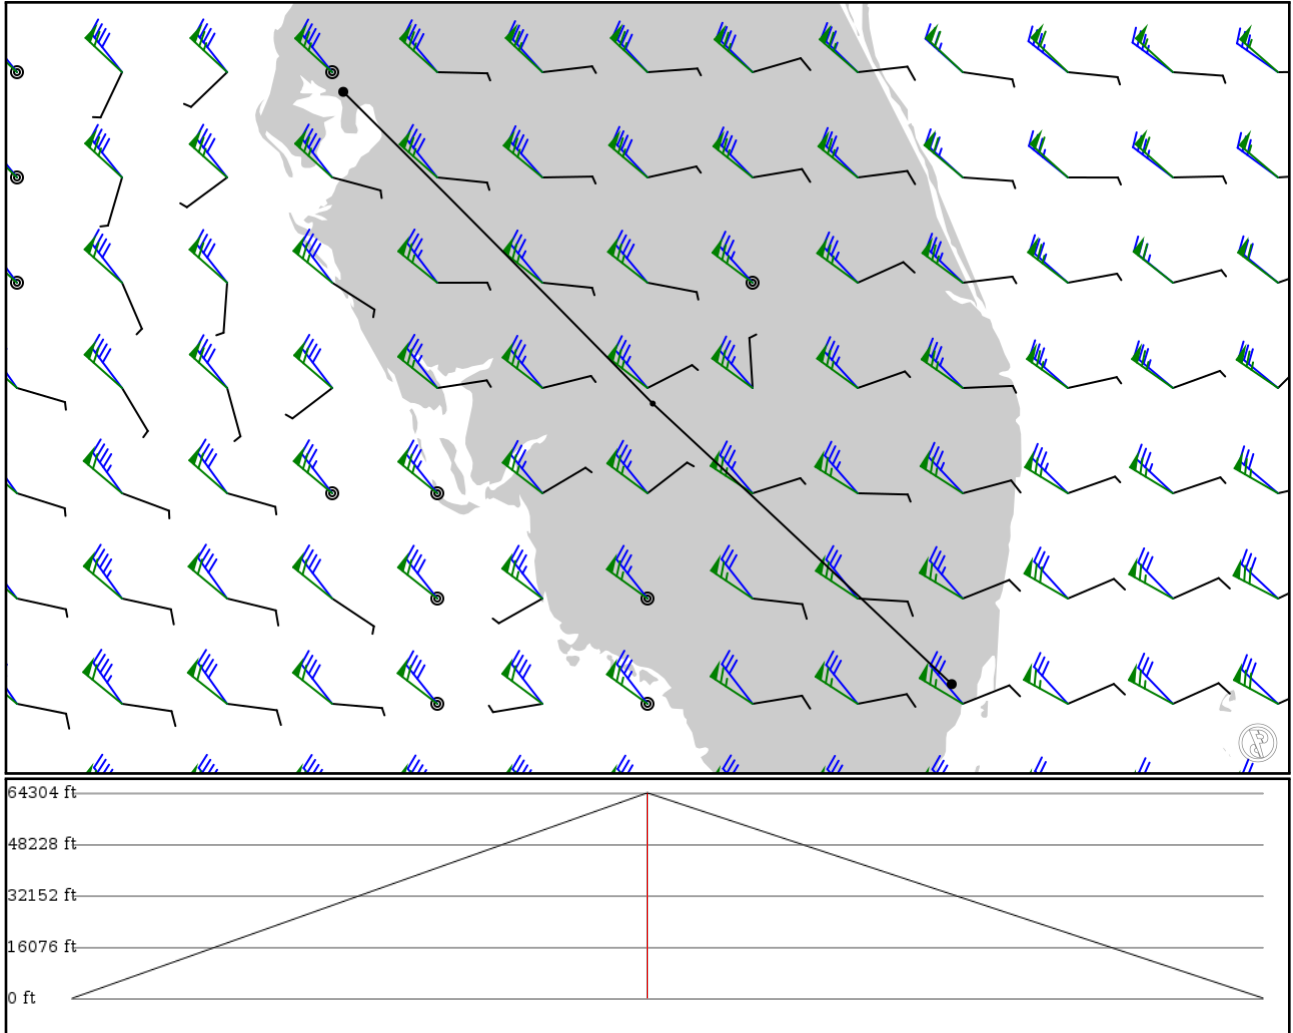

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 28000ft
- Cruise Speed: 330kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMIA	-	25.79617	0 ft	-	Miami Intl
APT	-	-80.28974	0 m		
LBV	-	26.82819	19,600 ft	85	LA BELLE VORTAC
DME	-	-81.39144	5,974 m		
KTPA	-	27.97489	0 ft	91	TAMPA INTL
APT	-	-82.53190	0 m		

KMIA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 11 ft / 3 m
Location: 25.796200 -80.289700
Magnetic Var: 7.275 W

METAR

KMIA 160553Z 19009KT 10SM FEW020 BKN100 OVC250 28/26 A2984 RMK AO2 SLP106 T02830256 10311 20283 55013 \$

TAF

TAF KMIA 160520Z 1606/1712 18006KT P6SM FEW030 SCT080 BKN250 FM160900 22010KT P6SM VCSH SCT020 BKN040 TEMPO 1610/

Frequencies

REC - 119.15 MHz - D-ATIS	REC - 133.67 MHz - D-ATIS
COM - 123.00 MHz - UNICOM	CLD - 135.35 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - MIAMI GROUND	GND - 127.50 MHz - MIAMI GROUND
TWR - 118.30 MHz - MIAMI TOWER	TWR - 123.90 MHz - MIAMI TOWER
APP - 120.50 MHz - MIAMI APPROACH	APP - 124.85 MHz - MIAMI APPROACH
APP - 125.75 MHz - MIAMI APPROACH	DEP - 119.45 MHz - MIAMI DEPARTURE
DEP - 125.50 MHz - MIAMI DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.64		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.66		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.65		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.66		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.65		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.67		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.88		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.90		289 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.87		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.87		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.63		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.63		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.87		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.87		4 m

KTPA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 26 ft / 8 m
Location: 27.974900 -82.531900
Magnetic Var: 6.197 W

METAR

KTPA 160553Z 35003KT 10SM CLR 25/23 A2984 RMK A02 SLP103 T02500228 10278 20244 58003

TAF

KTPA 160528Z 1606/1712 29006KT P6SM SCT025 FM160800 29006KT P6SM BKN025 FM161400 26006KT P6SM BKN050 FM161700 250

Frequencies

REC - 126.45 MHz - D-ATIS	REC - 128.47 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 133.60 MHz - CLEARANCE DELIVERY
GND - 121.70 MHz - TAMPA GROUND	GND - 121.35 MHz - TAMPA GROUND
TWR - 119.50 MHz - TAMPA TOWER	TWR - 119.05 MHz - TAMPA TOWER
APP - 118.15 MHz - TAMPA APPROACH	DEP - 118.15 MHz - TAMPA DEPARTURE
APP - 119.65 MHz - TAMPA APPROACH	DEP - 119.65 MHz - TAMPA DEPARTURE
APP - 118.80 MHz - TAMPA APPROACH	DEP - 118.80 MHz - TAMPA DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	151 ft	11,011 ft	1.72	CONCRETE	0 ft	417 ft
	46 m	3,356 m	7.92		0 m	127 m
19R	151 ft	11,011 ft	181.72	CONCRETE	0 ft	417 ft
	46 m	3,356 m	187.92		0 m	127 m
01R	151 ft	8,308 ft	1.72	CONCRETE	0 ft	410 ft
	46 m	2,532 m	7.91		0 m	125 m
19L	151 ft	8,308 ft	181.72	CONCRETE	0 ft	410 ft
	46 m	2,532 m	187.91		0 m	125 m
10	151 ft	7,005 ft	91.74	ASPHALT	505 ft	187 ft
	46 m	2,135 m	97.93		154 m	57 m
28	151 ft	7,005 ft	271.75	ASPHALT	0 ft	141 ft
	46 m	2,135 m	277.94		0 m	43 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	DME	IJRT	108.50 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
01L	LOC-ILS	IAMP	108.90 MHz	18 nm	1.72	-	22 ft
				33 km	7.92		22 m
19L	LOC-ILS	ITPA	110.30 MHz	18 nm	181.72	-	26 ft
				33 km	187.92		26 m
19R	LOC-ILS	IJRT	108.50 MHz	18 nm	181.72	-	26 ft
				33 km	187.92		26 m
01R	LOC-LOC	ITWJ	111.95 MHz	18 nm	1.72	-	26 ft
				33 km	7.92		26 m
01L	GS	IAMP	108.90 MHz	10 nm	1.72	3.00	26 ft
				19 km	7.92		26 m
19L	GS	ITPA	110.30 MHz	10 nm	181.72	3.00	26 ft
				19 km	187.92		26 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	GS	IJRT	108.50 MHz	10 nm	181.72	3.00	26 ft
				19 km	187.92		26 m