

HKMO

Moi International Airport


HTDA

Dar Es Salaam-Julius Nyerere Intl

2024/05/01 0456Z

HKMO UVUKO **UL431** VOSPA HTDA

172.53 nm / 319.53 km

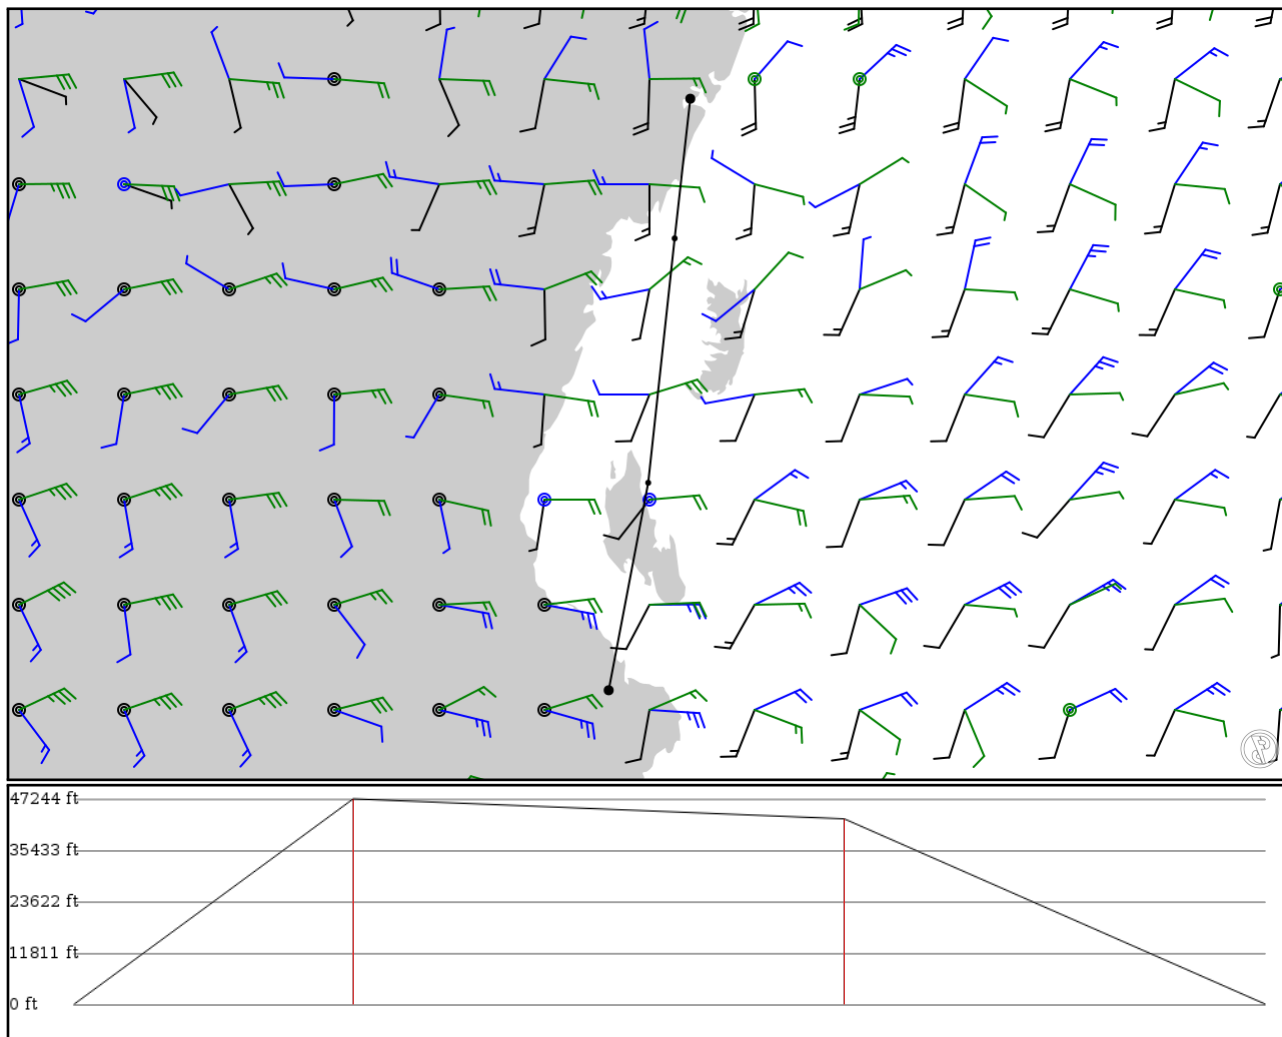

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
HKMO APT	- -	-4.03092 39.59690	0 ft 0 m	-	Moi International Airport
UVUKO FIX	- -	-4.70234 39.52170	14,400 ft 4,389 m	40 -	
VOSPA FIX	UL431 AWY-HI	-5.87733 39.39450	13,000 ft 3,962 m	70 -	
HTDA APT	- -	-6.87499 39.20440	0 ft 0 m	60	Dar Es Salaam-Julius Nyerere Intl

HKMO

Region: KENYA
Timezone: AFRICA/NAIROBI
Runways: 2

Elevation: 200 ft / 61 m
Location: -4.030920 39.596900
Magnetic Var: 0.854 W

METAR

HKMO 010430Z 21008KT 9999 FEW022 27/24 Q1009 NOSIG

TAF

TAF TAF HKMO 302300Z 0100/0206 21005KT 9999 FEW020 BECMG 0109/0112 18015KT FEW026 BECMG 0200/0206 21005KT SCT021

Frequencies

GND - 121.60 MHz - APRON CTL
APP - 121.70 MHz - RDR
APP - 120.30 MHz -
REC - 126.30 MHz - ATIS
TWR - 118.60 MHz -
APP - 122.70 MHz -
APP - 121.70 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	148 ft	10,998 ft	29.16	ASPHALT	0 ft	197 ft
	45 m	3,352 m	30.02		0 m	60 m
21	148 ft	10,998 ft	209.16	ASPHALT	0 ft	223 ft
	45 m	3,352 m	210.02		0 m	68 m
15	118 ft	4,295 ft	150.49	ASPHALT	0 ft	318 ft
	36 m	1,309 m	151.34		0 m	97 m
33	118 ft	4,295 ft	330.49	ASPHALT	0 ft	0 ft
	36 m	1,309 m	331.34		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
21	DME	IMI	110.10 MHz	18 nm	-	-	257 ft
				33 km	-		257 m
21	LOC-ILS	IMI	110.10 MHz	18 nm	209.16	-	187 ft
				33 km	210.02		187 m
21	GS	IMI	110.10 MHz	10 nm	209.27	3.00	194 ft
				19 km	210.13		194 m

HTDA

Region: TANZANIA
Timezone: AFRICA/DAR_ES_SALAAM
Runways: 2

Elevation: 182 ft / 55 m
Location: -6.874990 39.204400
Magnetic Var: 2.100 W

METAR

HTDA 010400Z 22006KT 9999 FEW013 25/22 Q1011 NOSIG

TAF

TAF HTDA 302300Z 0100/0206 23005KT 9999 SCT013 BECMG 0106/0110 22015KT BECMG 0117/0120 19005KT

Frequencies

REC - 119.00 MHz - DAR-ES-SALAAM ATIS
TWR - 118.30 MHz - DAR-ES-SALAAM TOWER

GND - 121.80 MHz - DAR-ES-SALAAM GROUND
APP - 119.60 MHz - DAR-ES-SALAAM APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	151 ft	9,880 ft	44.82	ASPHALT	0 ft	190 ft
	46 m	3,011 m	46.92		0 m	58 m
23	151 ft	9,880 ft	224.82	ASPHALT	0 ft	187 ft
	46 m	3,011 m	226.92		0 m	57 m
14	98 ft	3,304 ft	135.19	ASPHALT	0 ft	0 ft
	30 m	1,007 m	137.29		0 m	0 m
32	98 ft	3,304 ft	315.19	ASPHALT	0 ft	0 ft
	30 m	1,007 m	317.29		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	DL	110.50 MHz	18 nm	44.81	-	182 ft
				33 km	46.91		182 m
05	GS	DL	110.50 MHz	10 nm	44.81	3.00	182 ft
				19 km	46.91		182 m