


2024/05/22 0523Z

LFML NEVIX OLNUL BALEN ODAKA ETOIL TABOT DOPEL NOLSI EVIRA SALUN BLT HECA

1619.42 nm / 2999.17 km

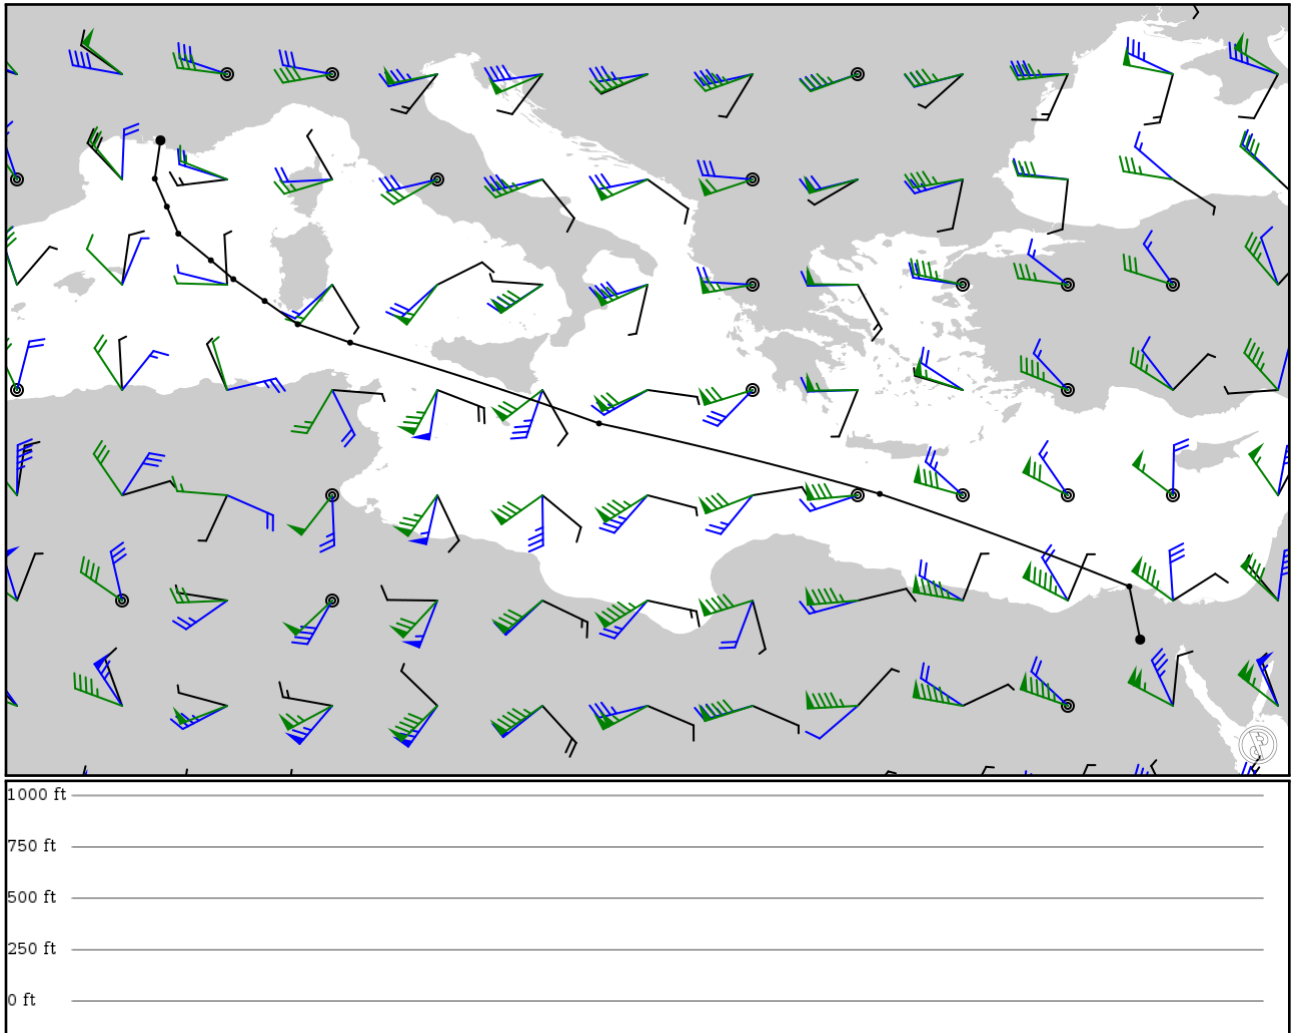

Notes

Requested: LFML NEVIX OLNUL BALEN ODAKA ETOIL TABOT DOPEL NOLSI EVIRA SALUN BLT HECA

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFML	-	43.43580	0 ft	-	Marseille Provence
APT	-	5.21343	0 m	-	
NEVIX	-	42.41420	0 ft	61	-
FIX	-	5.06167	0 m	-	-
OLNUL	-	41.66780	0 ft	47	-
FIX	-	5.38500	0 m	-	-
BALEN	-	40.94670	0 ft	45	-
FIX	-	5.69000	0 m	-	-
ODAKA	-	40.23530	0 ft	58	-
FIX	-	6.56194	0 m	-	-
ETOIL	-	39.73170	0 ft	40	-
FIX	-	7.16333	0 m	-	-
TABOT	-	39.15000	0 ft	52	-
FIX	-	8.00000	0 m	-	-
DOPEL	-	38.52750	0 ft	55	-
FIX	-	8.88361	0 m	-	-
NOLSI	-	38.03890	0 ft	72	-
FIX	-	10.28640	0 m	-	-
EVIRA	-	35.88140	0 ft	344	-
FIX	-	16.94170	0 m	-	-
SALUN	-	34.00000	0 ft	386	-
FIX	-	24.45000	0 m	-	-
BLT	-	31.52890	0 ft	368	BALTIM
VOR	-	31.12250	0 m	-	-
HECA	-	30.11140	0 ft	86	Cairo Intl
APT	-	31.41390	0 m	-	

LFML

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 2

Elevation: 69 ft / 21 m
Location: 43.435800 5.213430
Magnetic Var: 2.286 E

METAR

LFML 220500Z AUTO 33003KT 270V010 CAVOK 15/11 Q1014 BECMG 28015KT

TAF

TAF TAF LFML 220200Z 2203/2309 30005KT CAVOK TX24/2214Z TN13/2204Z BECMG 2206/2209 28015KT PROB40 TEMPO 2212/2216

Frequencies

TWR - 125.35 MHz - PROVENCE ATIS	GND - 121.72 MHz - PROVENCE PREFLIGHT
GND - 121.90 MHz - PROVENCE GROUND	TWR - 133.10 MHz - PROVENCE TOWER
TWR - 123.72 MHz - PROVENCE TOWER	APP - 120.20 MHz - PROVENCE APPROACH
TWR - 120.87 MHz - PROVENCE APPROACH	APP - 121.42 MHz - PROVENCE APPROACH
APP - 124.35 MHz - PROVENCE APPROACH	APP - 127.72 MHz - PROVENCE APPROACH
TWR - 129.47 MHz - PROVENCE APPROACH	APP - 132.30 MHz - PROVENCE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13L	148 ft	11,485 ft	134.05	ASPHALT	1,122 ft	295 ft
	45 m	3,501 m	131.76		342 m	90 m
31R	148 ft	11,485 ft	314.07	ASPHALT	2,165 ft	331 ft
	45 m	3,501 m	311.78		660 m	101 m
13R	148 ft	7,783 ft	134.89	ASPHALT	0 ft	197 ft
	45 m	2,372 m	132.61		0 m	60 m
31L	148 ft	7,783 ft	314.91	ASPHALT	348 ft	194 ft
	45 m	2,372 m	312.62		106 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13L	DME	ML	110.30 MHz	27 nm	-	-	10 ft
				50 km	-		10 m
13R	DME	MCE	108.30 MHz	27 nm	-	-	10 ft
				50 km	-		10 m
31R	DME	MPV	111.15 MHz	27 nm	-	-	10 ft
				50 km	-		10 m
13L	LOC-ILS	ML	110.30 MHz	18 nm	134.05	-	74 ft
				33 km	131.76		74 m
13R	LOC-ILS	MCE	108.30 MHz	18 nm	134.90	-	74 ft
				33 km	132.61		74 m
31R	LOC-ILS	MPV	111.15 MHz	18 nm	314.05	-	74 ft
				33 km	311.76		74 m
13L	GS	ML	110.30 MHz	10 nm	134.05	3.00	10 ft
				19 km	131.76		10 m
13R	GS	MCE	108.30 MHz	10 nm	134.90	3.00	74 ft
				19 km	132.61		74 m
31R	GS	MPV	111.15 MHz	10 nm	314.05	4.00	10 ft
				19 km	311.76		10 m

HECA

Region: EGYPT
Timezone: AFRICA/CAIRO
Runways: 3

Elevation: 466 ft / 142 m
Location: 30.111400 31.413900
Magnetic Var: 4.954 E

METAR

HECA 220500Z 02003KT CAVOK 29/13 Q1013 NOSIG

TAF

TAF HECA 212300Z 2200/2306 06008KT CAVOK PROB30 TEMPO 2200/2206 4000 HZ NSC

Frequencies

REC - 122.60 MHz - ATIS
GND - 121.90 MHz - CAIRO GROUND NORTH
APP - 119.05 MHz - CAIRO APPROACH
GND - 120.40 MHz - CAIRO GROUND SOUTH
TWR - 118.10 MHz - CAIRO TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	197 ft	13,135 ft	49.04	ASPHALT	0 ft	217 ft
	60 m	4,004 m	44.08		0 m	66 m
23L	197 ft	13,135 ft	229.05	ASPHALT	0 ft	226 ft
	60 m	4,004 m	224.10		0 m	69 m
05C	197 ft	13,132 ft	49.04	ASPHALT	0 ft	217 ft
	60 m	4,003 m	44.08		0 m	66 m
23C	197 ft	13,132 ft	229.05	ASPHALT	0 ft	226 ft
	60 m	4,003 m	224.10		0 m	69 m
05L	197 ft	10,840 ft	49.29	ASPHALT	0 ft	184 ft
	60 m	3,304 m	44.34		0 m	56 m
23R	197 ft	10,840 ft	229.30	ASPHALT	0 ft	184 ft
	60 m	3,304 m	224.35		0 m	56 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	CRL	110.90 MHz	18 nm	-	-	230 ft
				33 km	-		230 m
05R	DME	IROT	109.90 MHz	18 nm	-	-	430 ft
				33 km	-		430 m
23L	DME	ILOT	109.50 MHz	18 nm	-	-	420 ft
				33 km	-		420 m
23R	DME	CRR	110.30 MHz	18 nm	-	-	230 ft
				33 km	-		230 m
05L	LOC-ILS	IZFL	110.90 MHz	18 nm	49.30	-	466 ft
				33 km	44.35		466 m
05C	LOC-ILS	IZFC	109.90 MHz	18 nm	49.04	-	466 ft
				33 km	44.09		466 m
05R	LOC-ILS	IZFR	108.90 MHz	18 nm	49.05	-	466 ft
				33 km	44.10		466 m
23L	LOC-ILS	ITTL	108.70 MHz	18 nm	229.05	-	466 ft
				33 km	224.10		466 m
23C	LOC-ILS	ITTC	109.50 MHz	18 nm	229.04	-	466 ft
				33 km	224.09		466 m
23R	LOC-ILS	ITTR	110.30 MHz	18 nm	229.30	-	466 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	224.35		466 m
05L	GS	IZFL	110.90 MHz	10 nm	49.30	3.00	466 ft
				19 km	44.35		466 m
05C	GS	IZFC	109.90 MHz	10 nm	49.04	3.00	466 ft
				19 km	44.09		466 m
05R	GS	IZFR	108.90 MHz	10 nm	49.05	3.00	466 ft
				19 km	44.10		466 m
23L	GS	ITTL	108.70 MHz	10 nm	229.05	3.00	466 ft
				19 km	224.10		466 m
23C	GS	ITTC	109.50 MHz	10 nm	229.04	3.00	466 ft
				19 km	224.09		466 m
23R	GS	ITTR	110.30 MHz	10 nm	229.30	3.00	466 ft
				19 km	224.35		466 m