

KRSW

Southwest Florida Intl


KOPF

Opa Locka

2024/06/06 1341Z

KRSW FRRDY KOPF

88.12 nm / 163.19 km

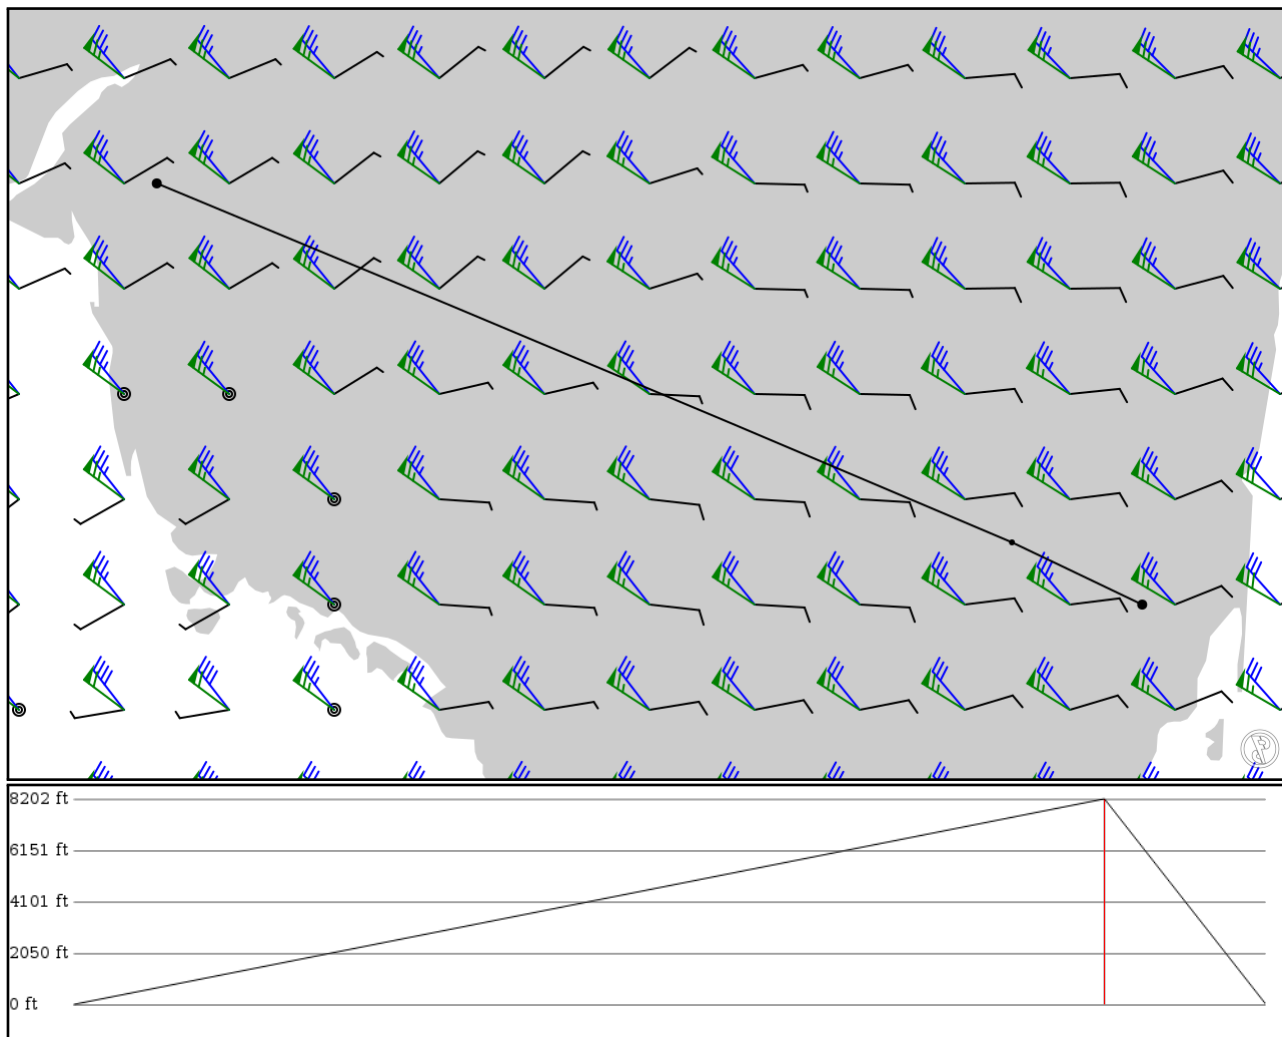

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KRSW	-	26.53620	0 ft	-	Southwest Florida Intl
APT	-	-81.75520	0 m		
FRRDY	-	25.99920	2,500 ft	76	-
FIX	-	-80.47360	762 m		
KOPF	-	25.90610	0 ft	11	Opa Locka
APT	-	-80.27840	0 m		

KRSW

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 1

Elevation: 26 ft / 8 m
Location: 26.536200 -81.755200
Magnetic Var: 6.502 W

METAR

KRSW 061253Z 17006KT 10SM CLR 28/25 A2988 RMK A02 SLP115 T02830250

TAF

TAF KRSW 061126Z 0612/0712 17003KT P6SM BKN250 FM061600 19005KT P6SM FEW050 FEW250 FM062300 24008KT P6SM VCTS SCT

Frequencies

COM - 122.95 MHz - FORT MYERS UNICOM	REC - 124.65 MHz - FORT MYERS ATIS
GND - 121.90 MHz - FORT MYERS GROUND	TWR - 128.75 MHz - FORT MYERS TOWER
DEP - 119.75 MHz - FORT MYERS DEPARTURE	APP - 119.75 MHz - FORT MYERS APPROACH
CLD - 132.07 MHz - FORT MYERS CLEARANCE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	151 ft	12,013 ft	53.96	CONCRETE	0 ft	397 ft
	46 m	3,662 m	60.46		0 m	121 m
24	151 ft	12,013 ft	233.97	CONCRETE	0 ft	394 ft
	46 m	3,662 m	240.48		0 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IRSW	111.50 MHz	18 nm	53.96	-	28 ft
				33 km	60.46		28 m
06	GS	IRSW	111.50 MHz	10 nm	53.96	3.00	28 ft
				19 km	60.46		28 m

KOPF

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 7 ft / 2 m
Location: 25.906100 -80.278400
Magnetic Var: 7.301 W

METAR

KOPF 061253Z 12006KT 10SM SCT021 SCT028 31/25 A2987 RMK A02 SLP117 T03060250

TAF

TAF KOPF 061137Z 0612/0712 VRB05KT P6SM FEW030 SCT250 FM061500 14007KT P6SM SCT030 SCT050 FM061800 15009KT P6SM V

Frequencies

REC - 125.90 MHz - ATIS
CLD - 119.20 MHz - CLNC DEL
TWR - 118.60 MHz -
APP - 128.60 MHz - MIAMI APP/DEP
COM - 120.70 MHz - CTAF
GND - 121.90 MHz -
TWR - 120.70 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	7,989 ft	86.92	ASPHALT	0 ft	190 ft
	46 m	2,435 m	94.22		0 m	58 m
27R	151 ft	7,989 ft	266.93	ASPHALT	0 ft	197 ft
	46 m	2,435 m	274.23		0 m	60 m
12	151 ft	6,797 ft	121.98	ASPHALT	801 ft	197 ft
	46 m	2,072 m	129.28		244 m	60 m
30	151 ft	6,797 ft	301.98	ASPHALT	0 ft	200 ft
	46 m	2,072 m	309.29		0 m	61 m
09R	98 ft	4,300 ft	86.93	ASPHALT	0 ft	0 ft
	30 m	1,311 m	94.23		0 m	0 m
27L	98 ft	4,300 ft	266.93	ASPHALT	0 ft	0 ft
	30 m	1,311 m	274.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	DME	IOLX	111.55 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
27R	DME	IPLJ	111.35 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
09L	LOC-ILS	IOPF	110.50 MHz	18 nm	86.92	-	7 ft
				33 km	94.22		7 m
12	LOC-ILS	IOLX	111.55 MHz	18 nm	121.98	-	7 ft
				33 km	129.28		7 m
27R	LOC-ILS	IPLJ	111.35 MHz	18 nm	266.92	-	7 ft
				33 km	274.22		7 m
09L	GS	IOPF	110.50 MHz	10 nm	86.92	3.00	7 ft
				19 km	94.22		7 m
12	GS	IOLX	111.55 MHz	10 nm	121.98	3.00	7 ft
				19 km	129.28		7 m
27R	GS	IPLJ	111.35 MHz	10 nm	266.92	3.00	7 ft
				19 km	274.22		7 m