

DNAA

Abuja/Nnamdi Azikiwe


DNKN

Mallam Aminu Kano Intl

2024/05/03 2235Z

DNAA KUA DNKN

203.88 nm / 377.58 km

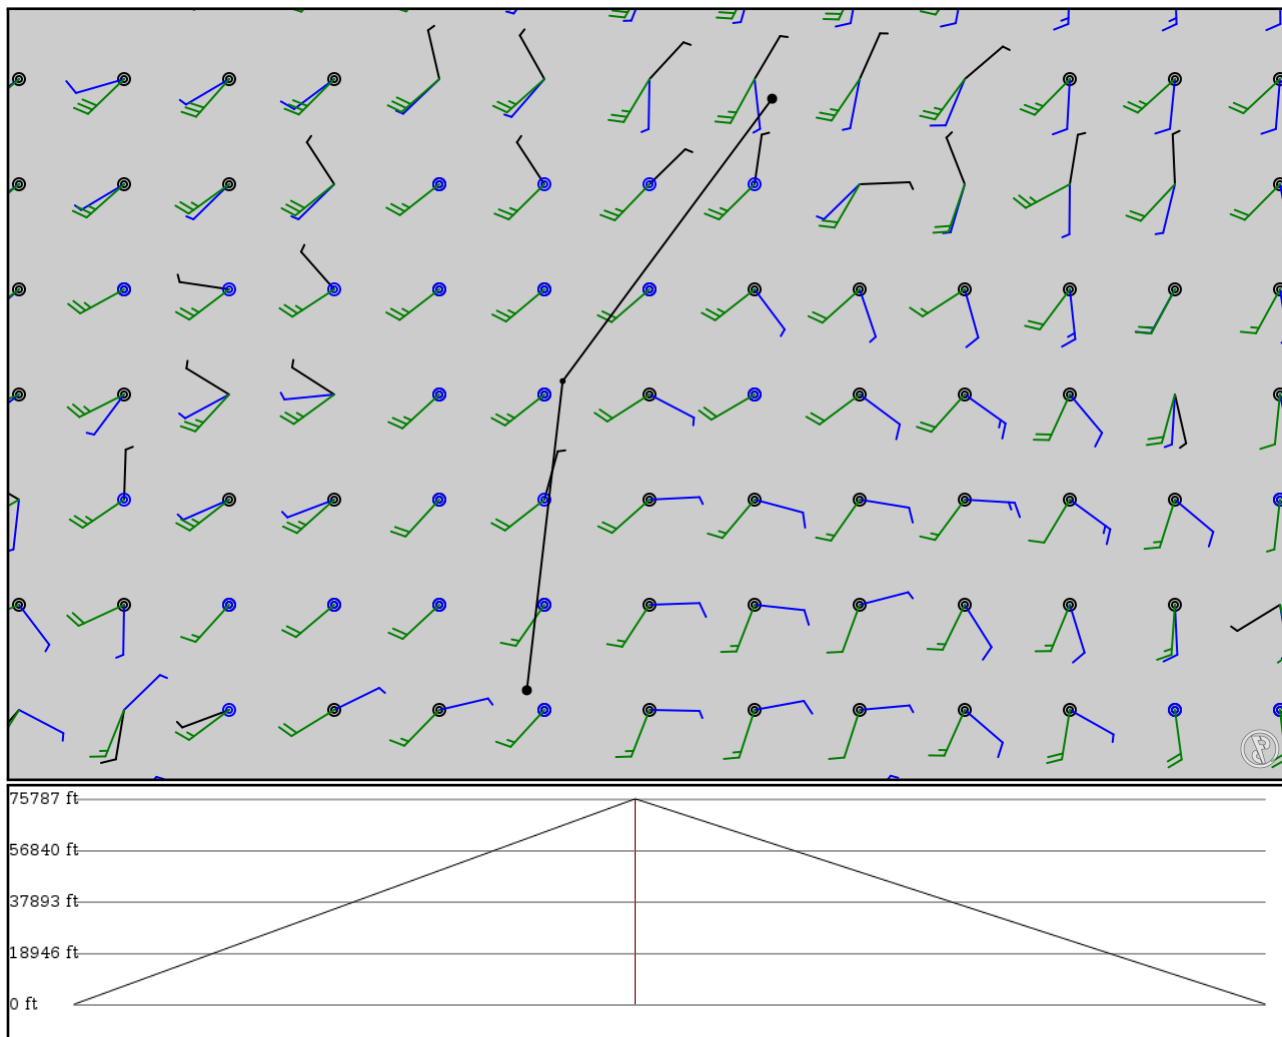

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
DNAA	-	9.00679	0 ft	-	Abuja/Nnamdi Azikiwe
APT	-	7.26317	0 m		
KUA	-	10.59610	23,100 ft	96	KADUNA
VOR	-	7.44747	7,041 m		
DNKN	-	12.04760	0 ft	107	Mallam Aminu Kano Intl
APT	-	8.52461	0 m		

DNAA

Region: NIGERIA
Timezone: AFRICA/LAGOS
Runways: 1

Elevation: 1,122 ft / 342 m
Location: 9.006790 7.263170
Magnetic Var: 0.179 W

METAR

DNAA 032200Z 2200KT 9999 FEW010 28/24 Q1013 NOSIG

TAF

TAF TAF DNAA 031700Z 0318/0424 VRB02KT 9999 FEW012 PROB30 0318/0322 TS FEW020CB BECMG 0400/0402 CAVOK BECMG 0408/0410

Frequencies

REC - 127.05 MHz - ATIS
APP - 119.80 MHz -

TWR - 118.60 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	147 ft	11,855 ft	34.91	ASPHALT	0 ft	213 ft
	45 m	3,613 m	35.09		0 m	65 m
22	147 ft	11,855 ft	214.91	ASPHALT	0 ft	213 ft
	45 m	3,613 m	215.09		0 m	65 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	IAC	111.90 MHz	18 nm	-	-	1,224 ft
				33 km	-		1,224 m
22	DME	IAB	109.30 MHz	18 nm	-	-	1,191 ft
				33 km	-		1,191 m
04	LOC-ILS	IAC	111.90 MHz	18 nm	34.91	-	1,122 ft
				33 km	35.09		1,122 m
22	LOC-ILS	IAB	109.30 MHz	18 nm	214.91	-	1,122 ft
				33 km	215.09		1,122 m
04	GS	IAC	111.90 MHz	10 nm	34.91	3.00	1,122 ft
				19 km	35.09		1,122 m
22	GS	IAB	109.30 MHz	10 nm	214.91	3.00	1,122 ft
				19 km	215.09		1,122 m

DNKN

Region: NIGERIA
Timezone: AFRICA/LAGOS
Runways: 2

Elevation: 1,562 ft / 476 m
Location: 12.047600 8.524610
Magnetic Var: 0.508 E

METAR

DNKN 032200Z 22012KT CAVOK 32/19 Q1013 NOSIG

TAF

TAF TAF DNKN 031700Z 0318/0424 25008KT 9999 FEW012 TEMPO 0320/0401 TS SCT010 FEW019CB

Frequencies

REC - 123.60 MHz - ATIS
APP - 125.70 MHz - KANO APPROACH
TWR - 118.10 MHz - KANO TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	195 ft	10,847 ft	61.03	ASPHALT	0 ft	390 ft
	59 m	3,306 m	60.52		0 m	119 m
24	195 ft	10,847 ft	241.03	ASPHALT	0 ft	394 ft
	59 m	3,306 m	240.53		0 m	120 m
05	145 ft	8,551 ft	44.45	ASPHALT	495 ft	0 ft
	44 m	2,606 m	43.94		151 m	0 m
23	145 ft	8,551 ft	224.45	ASPHALT	0 ft	0 ft
	44 m	2,606 m	223.94		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	DME	IKC	110.30 MHz	18 nm	-	-	1,535 ft
				33 km	-		1,535 m
06	DME	IKN	109.50 MHz	18 nm	-	-	1,545 ft
				33 km	-		1,545 m
05	LOC-ILS	IKC	110.30 MHz	18 nm	44.45	-	1,562 ft
				33 km	43.94		1,562 m
06	LOC-ILS	IKN	109.50 MHz	18 nm	61.03	-	1,562 ft
				33 km	60.52		1,562 m
24	LOC-ILS	IKK	111.10 MHz	18 nm	241.03	-	1,562 ft
				33 km	240.52		1,562 m
05	GS	IKC	110.30 MHz	10 nm	44.45	3.00	1,562 ft
				19 km	43.94		1,562 m
06	GS	IKN	109.50 MHz	10 nm	61.03	3.00	1,562 ft
				19 km	60.52		1,562 m
24	GS	IKK	111.10 MHz	10 nm	241.03	3.00	1,562 ft
				19 km	240.52		1,562 m