

KADS

Addison


KRBD

DALLAS EXECUTIVE

2024/05/05 2052Z

KADS CVE KRBD

18.52 nm / 34.29 km

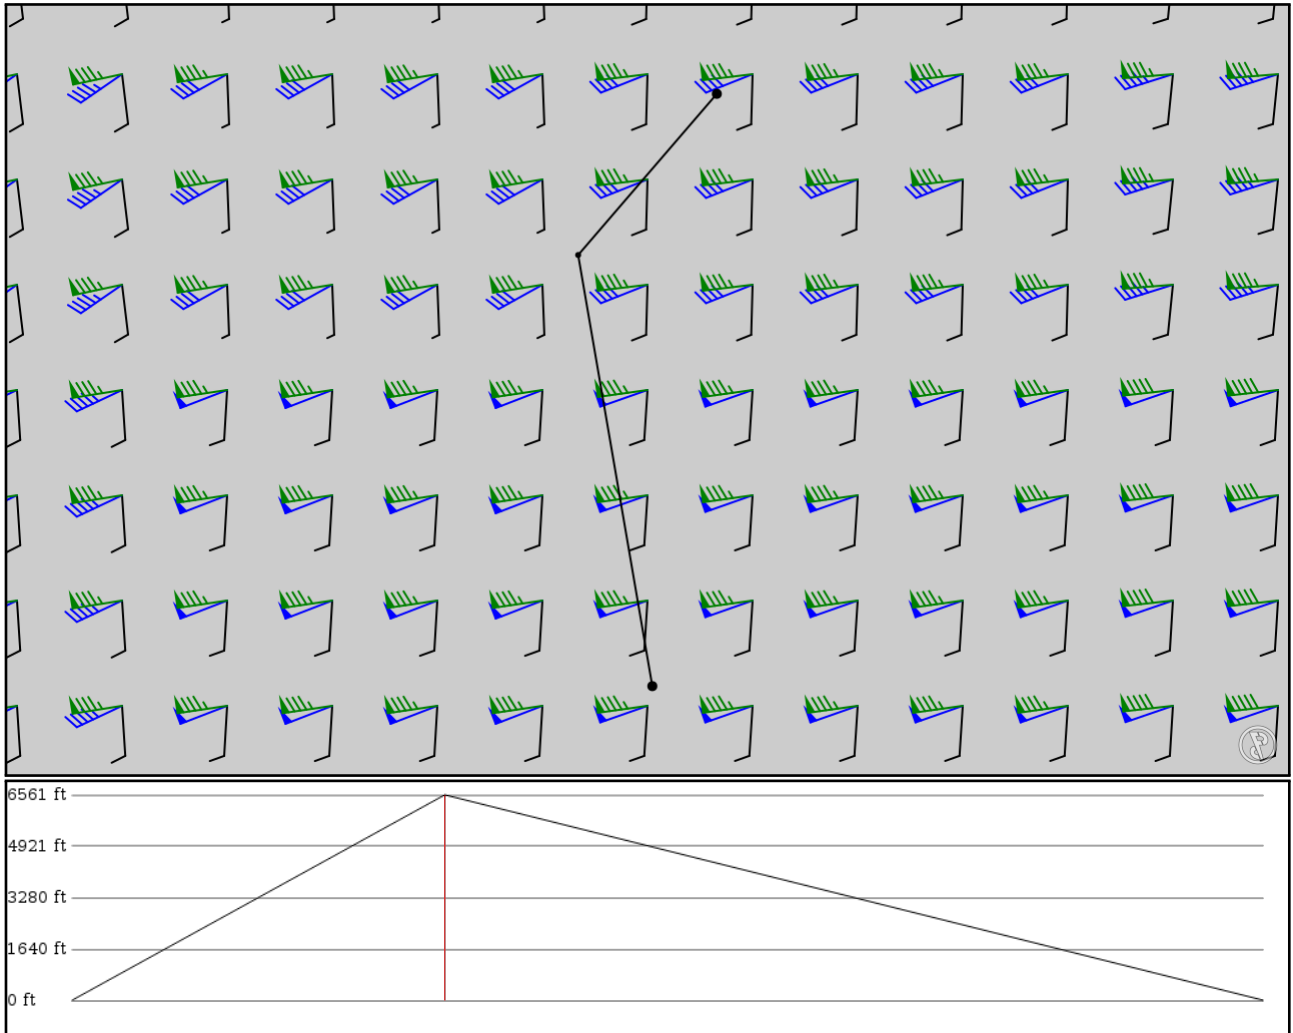

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KADS	-	32.96860	0 ft	-	Addison
APT	-	-96.83650	0 m		
CVE	-	32.89030	2,000 ft	5	COWBOY (DALLAS)
VOR	-	-96.90400	610 m		
KRBD	-	32.68080	0 ft	12	DALLAS EXECUTIVE
APT	-	-96.86790	0 m		

KADS

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 1

Elevation: 645 ft / 197 m
Location: 32.968600 -96.836500
Magnetic Var: 2.610 E

METAR

KADS 051947Z 33003KT 10SM BKN032 25/17 A2991

TAF

UNKNOWN

Frequencies

COM - 122.95 MHz - ADDISON UNICOM	REC - 133.40 MHz - ADDISON ATIS
GND - 121.60 MHz - ADDISON GROUND	TWR - 126.00 MHz - ADDISON TOWER
APP - 124.30 MHz - REGIONAL APPROACH	DEP - 124.30 MHz - REGIONAL DEPARTURE
CLD - 119.55 MHz - CLEARANCE DELIVERY	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	100 ft	7,219 ft	159.86	ASPHALT	981 ft	0 ft
	30 m	2,200 m	157.25		299 m	0 m
33	100 ft	7,219 ft	339.86	ASPHALT	774 ft	387 ft
	30 m	2,200 m	337.25		236 m	118 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	DME	IADS	110.10 MHz	18 nm	-	-	643 ft
				33 km	-		643 m
33	DME	ITBQ	110.10 MHz	18 nm	-	-	643 ft
				33 km	-		643 m
15	LOC-ILS	IADS	110.10 MHz	18 nm	159.86	-	645 ft
				33 km	157.25		645 m
33	LOC-ILS	ITBQ	110.10 MHz	18 nm	339.86	-	645 ft
				33 km	337.25		645 m
15	GS	IADS	110.10 MHz	10 nm	159.86	3.00	645 ft
				19 km	157.25		645 m
33	GS	ITBQ	110.10 MHz	10 nm	339.86	3.00	645 ft
				19 km	337.25		645 m

KRBD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 2

Elevation: 660 ft / 201 m
Location: 32.680800 -96.867900
Magnetic Var: 2.629 E

METAR

KRBD 051953Z 35004KT 10SM SCT028 26/19 A2989 RMK A02 SLP115 T02560189

TAF

UNKNOWN

Frequencies

REC - 126.35 MHz - ATIS
COM - 122.95 MHz - UNICOM
GND - 121.70 MHz -
APP - 125.20 MHz - RGNL APP/DEP
COM - 120.30 MHz - CTAF
CLD - 118.62 MHz - CLNC DEL
TWR - 120.30 MHz - EXECUTIVE TWR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13	150 ft	6,454 ft	135.21	CONCRETE	0 ft	0 ft
	46 m	1,967 m	132.58		0 m	0 m
31	150 ft	6,454 ft	315.22	CONCRETE	0 ft	0 ft
	46 m	1,967 m	312.59		0 m	0 m
17	150 ft	3,810 ft	180.13	CONCRETE	0 ft	0 ft
	46 m	1,161 m	177.50		0 m	0 m
35	150 ft	3,810 ft	0.12	CONCRETE	0 ft	0 ft
	46 m	1,161 m	357.50		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
31	LOC-ILS	IRBD	108.50 MHz	18 nm	315.21	-	660 ft
				33 km	312.58		660 m
31	GS	IRBD	108.50 MHz	10 nm	315.42	3.00	651 ft
				19 km	312.80		651 m