

PANC

Ted Stevens Anchorage Intl


KLAX

Los Angeles Intl

2024/05/16 0606Z

PANC NOWEL **J804R** MDO **B453** BOXER FURNS **T257** OLJEK **V27** FLUEN **T257** ENI **J143** PYE **V107** OAK **J1** DERBB
KLAX

2069.55 nm / 3832.81 km

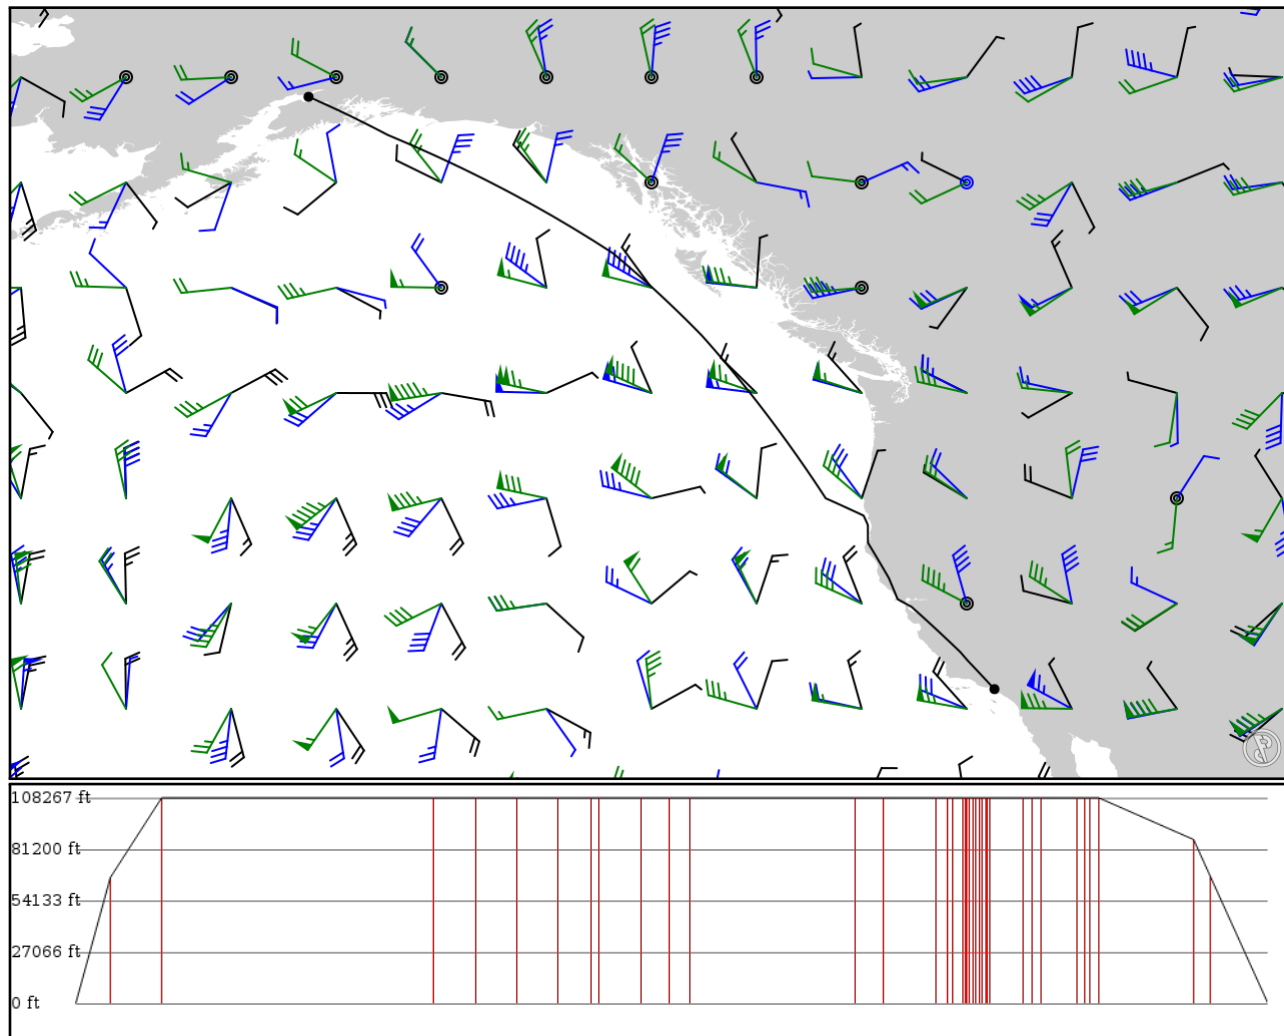

Notes

Basic altitude profile:

- Ascent Rate: 2600ft/min
- Ascent Speed: 260kts
- Cruise Altitude: 33000ft
- Cruise Speed: 468kts
- Descent Rate: 1600ft/min
- Descent Speed: 260kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC	-	61.17430	0 ft	-	Ted Stevens Anchorage Intl
APT	-	-149.99800	0 m	-	
NOWEL	-	60.48390	20,200 ft	60	-
FIX	-	-148.47500	6,157 m	-	
MDO	J804R	59.42180	33,000 ft	90	MIDDLETON ISLAND
VOR	AWY-HI	-146.35000	10,058 m	-	
KATCH	B453	54.00000	33,000 ft	470	-
FIX	AWY-HI	-136.00000	10,058 m	-	
METPA	B453	53.00610	33,000 ft	72	-
FIX	AWY-HI	-134.83800	10,058 m	-	
NAKBI	B453	52.00530	33,000 ft	72	-
FIX	AWY-HI	-133.73300	10,058 m	-	
PETPA	B453	51.00500	33,000 ft	71	-
FIX	AWY-HI	-132.68700	10,058 m	-	
KURTT	B453	50.19970	33,000 ft	57	-
FIX	AWY-HI	-131.88500	10,058 m	-	
SIMLU	B453	50.00530	33,000 ft	13	-
FIX	AWY-HI	-131.71000	10,058 m	-	
TAMRU	B453	48.95580	33,000 ft	72	-
FIX	AWY-HI	-130.80300	10,058 m	-	
VIDKU	B453	48.22780	33,000 ft	49	-
FIX	AWY-HI	-130.20000	10,058 m	-	
KANUA	B453	47.69170	33,000 ft	36	-
FIX	AWY-HI	-129.76800	10,058 m	-	
KYLLE	B453	43.44000	33,000 ft	286	-
FIX	AWY-HI	-126.65700	10,058 m	-	
BOXER	B453	42.71670	33,000 ft	48	-
FIX	AWY-HI	-126.18000	10,058 m	-	
FURNS	-	41.92110	33,000 ft	90	-
FIX	-	-124.43600	10,058 m	-	
CIGCA	T257	41.61100	33,000 ft	19	-
FIX	AWY-LO	-124.29100	10,058 m	-	
OLJEK	T257	41.47520	33,000 ft	8	-
FIX	AWY-LO	-124.23900	10,058 m	-	
CULDU	V27	41.16730	33,000 ft	18	-
FIX	AWY-LO	-124.23700	10,058 m	-	
WHEEL	V27	41.09740	33,000 ft	4	-
FIX	AWY-LO	-124.23700	10,058 m	-	
TRIAL	V27	41.06290	33,000 ft	2	-
FIX	AWY-LO	-124.23700	10,058 m	-	
HOCUT	V27	40.97630	33,000 ft	5	-
FIX	AWY-LO	-124.23600	10,058 m	-	
HEXIT	V27	40.88470	33,000 ft	5	-
FIX	AWY-LO	-124.23600	10,058 m	-	
SEGVE	V27	40.80960	33,000 ft	4	-
FIX	AWY-LO	-124.23500	10,058 m	-	
FOT	V27	40.67130	33,000 ft	8	FORTUNA
VOR	AWY-LO	-124.23500	10,058 m	-	
TUNGS	V27	40.61070	33,000 ft	4	-
FIX	AWY-LO	-124.19800	10,058 m	-	
OLRIO	V27	40.51990	33,000 ft	6	-
FIX	AWY-LO	-124.14300	10,058 m	-	
HIDAK	V27	40.46260	33,000 ft	3	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-LO	-124.10800	10,058 m		
EBBLS	V27	40.42610	33,000 ft	2	-
FIX	AWY-LO	-124.08600	10,058 m		
FLUEN	V27	39.54660	33,000 ft	58	-
FIX	AWY-LO	-123.56200	10,058 m		
MERRI	T257	39.29650	33,000 ft	16	-
FIX	AWY-LO	-123.41600	10,058 m		
ENI	T257	39.05320	33,000 ft	16	MENDOCINO (UKIAH)
VOR	AWY-LO	-123.27400	10,058 m		
PYE	J143	38.07980	33,000 ft	61	POINT REYES
VOR	AWY-HI	-122.86800	10,058 m		
MICRA	V107	37.95740	33,000 ft	12	-
FIX	AWY-LO	-122.64400	10,058 m		
COMMO	V107	37.87420	33,000 ft	8	-
FIX	AWY-LO	-122.49200	10,058 m		
OAK	V107	37.72590	33,000 ft	15	OAKLAND
VOR	AWY-LO	-122.22400	10,058 m		
AVE	J1	35.64700	26,300 ft	165	AVENAL
VOR	AWY-HI	-119.97900	8,016 m		
DERBB	J1	35.25590	20,400 ft	28	-
FIX	AWY-HI	-119.64100	6,218 m		
KLAX	-	33.94310	0 ft	99	Los Angeles Intl
APT	-	-118.40900	0 m		

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.019 E

METAR

PANC 160453Z 23010KT 10SM FEW040 BKN200 09/01 A2997

TAF

PANC 160535Z 1606/1712 23010KT P6SM FEW040 BKN200 FM160800 18008KT P6SM SCT150 FM161200 VRB05KT P6SM BKN100 FM162

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.82		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.88		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.86		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.91		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.87		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.88		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.85		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.88		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.88		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.85		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.88		151 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.440 E

METAR

KLAX 160506Z 27006KT 10SM FEW011 OVC028 15/12 A2995 RMK A02 T01500117

TAF

KLAX 160558Z 1606/1712 26006KT P6SM OVC025 FM161800 25007KT P6SM OVC030 FM162100 26015KT P6SM BKN035 FM170400 260

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m