


2024/05/08 0405Z

OIKK ALMOB **R654** YZD YZD **W32** PURKI **T215** OBRIX OIII

448.17 nm / 830.01 km

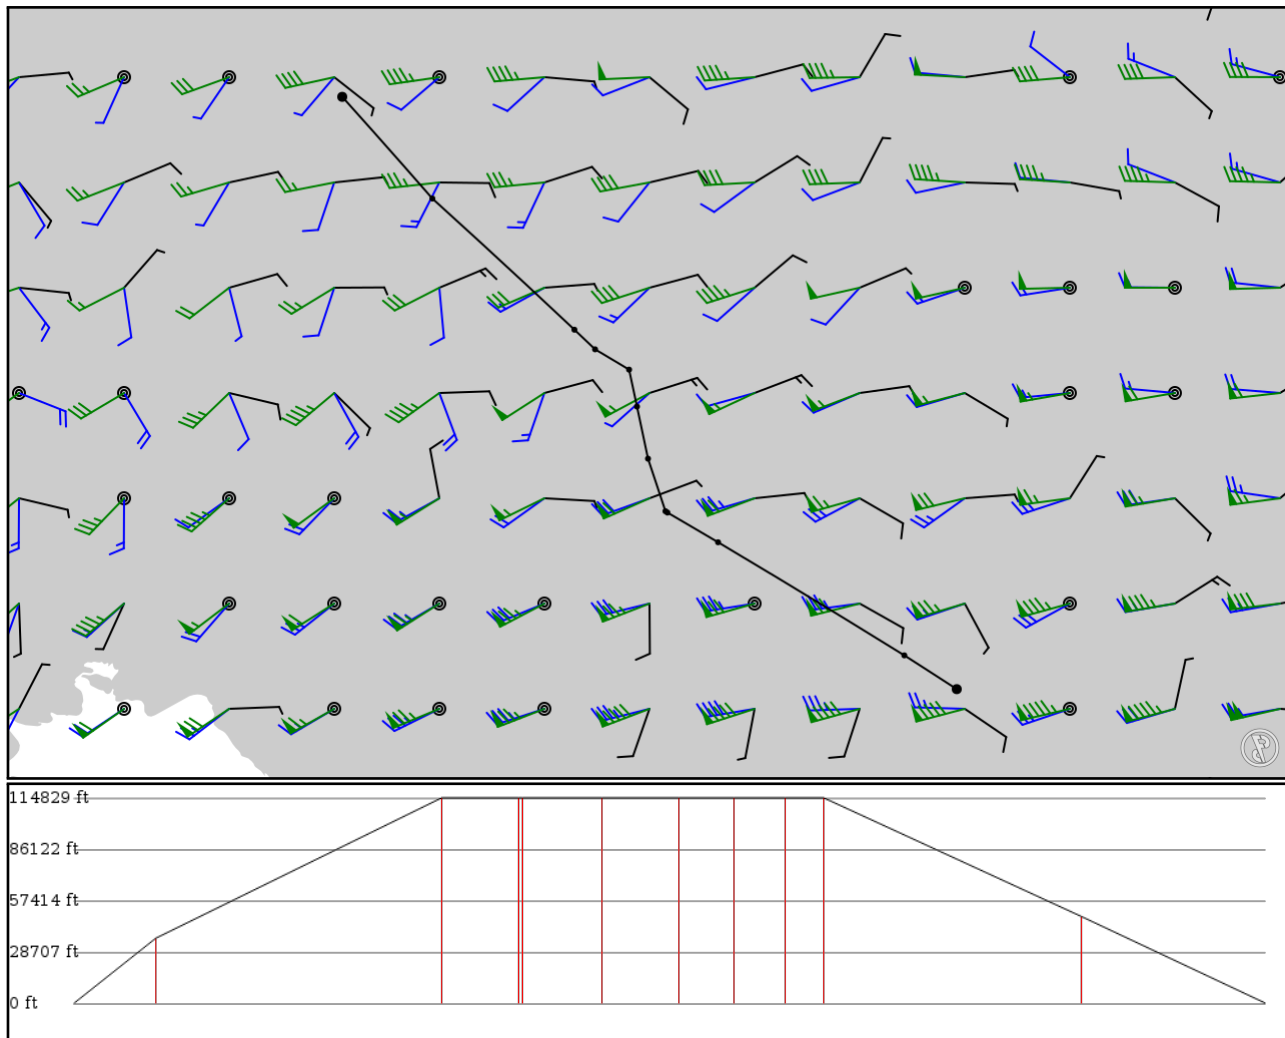

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OIKK APT	-	30.26810 56.95530	0 ft 0 m	-	KERMAN
ALMOB FIX	-	30.57750 56.47420	11,100 ft 3,383 m	31	-
BOMUN FIX	R654 AWY-HI	31.61330 54.76560	35,000 ft 10,668 m	107	-
YZD DME	R654 AWY-HI	31.88530 54.30080	35,000 ft 10,668 m	28	YAZD SHAHID SADOOGHI TACAN
YZD VOR	-	31.89770 54.28270	35,000 ft 10,668 m	1	YAZD
BONOL FIX	W32 AWY-HI	32.37890 54.12280	35,000 ft 10,668 m	30	-
ALNER FIX	W32 AWY-HI	32.85610 54.02170	35,000 ft 10,668 m	29	-
PURKI FIX	W32 AWY-HI	33.19440 53.94920	35,000 ft 10,668 m	20	-
KAVEK FIX	T215 AWY-HI	33.38030 53.63720	35,000 ft 10,668 m	19	-
RERET FIX	T215 AWY-HI	33.56000 53.44750	35,000 ft 10,668 m	14	-
OBRIX FIX	T215 AWY-HI	34.76110 52.14440	14,800 ft 4,511 m	96	-
OIII APT	-	35.69260 51.31750	0 ft 0 m	69	Tehran Mehrabad Intl

OIII

Region: IRAN
Timezone: ASIA/TEHRAN
Runways: 3

Elevation: 3,963 ft / 1,208 m
Location: 35.692600 51.317500
Magnetic Var: 5.105 E

METAR

OIII 080330Z 32006KT 9999 SCT040 18/M01 Q1014 A2997

TAF

TAF OIII 072300Z 0800/0906 29008KT 7000 FEW035 SCT100 TEMPO 0812/0818 33020KT 6000 FEW035CB SCT040 SCT100

Frequencies

REC - 128.00 MHz - ATIS	TWR - 118.10 MHz - MEHRABAD TOWER
TWR - 124.45 MHz - MEHRABAD TOWER	GND - 121.70 MHz - MEHRABAD GROUND
GND - 121.90 MHz - MEHRABAD GROUND	CLD - 121.85 MHz - MEHRABAD CLEARANCE DELIVERY
APP - 119.70 MHz - MEHRABAD APPROACH	APP - 125.10 MHz - MEHRABAD APPROACH
APP - 119.70 MHz - MEHRABAD RADAR	APP - 125.10 MHz - MEHRABAD RADAR
DEP - 125.10 MHz - MEHRABAD RADAR	DEP - 119.70 MHz - MEHRABAD RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	131 ft	1,589 ft	88.24	CONCRETE	16 ft	75 ft
	40 m	484 m	83.13		5 m	23 m
27	131 ft	1,589 ft	268.24	CONCRETE	16 ft	194 ft
	40 m	484 m	263.13		5 m	59 m
11L	148 ft	13,087 ft	109.70	CONCRETE	0 ft	0 ft
	45 m	3,989 m	104.60		0 m	0 m
29R	148 ft	13,087 ft	289.73	CONCRETE	0 ft	0 ft
	45 m	3,989 m	284.62		0 m	0 m
11R	197 ft	13,379 ft	109.74	ASPHALT	0 ft	1,191 ft
	60 m	4,078 m	104.63		0 m	363 m
29L	197 ft	13,379 ft	289.76	ASPHALT	144 ft	141 ft
	60 m	4,078 m	284.66		44 m	43 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
29L	DME	ITHL	109.90 MHz	18 nm	-	-	3,804 ft
				33 km	-		3,804 m
29L	LOC-ILS	ITHL	109.90 MHz	18 nm	289.75	-	3,963 ft
				33 km	284.64		3,963 m
29L	GS	ITHL	109.90 MHz	10 nm	289.75	3.30	3,963 ft
				19 km	284.64		3,963 m