

KLAS

McCarran Intl


PHNL

Daniel K. Inouye International Airport

2024/05/16 0221Z

KLAS SHADO **J110** SNS **V230** SHOHEY CINNY **R465** CREAM BAART **R464** SOMOH PHNL

2464.69 nm / 4564.60 km

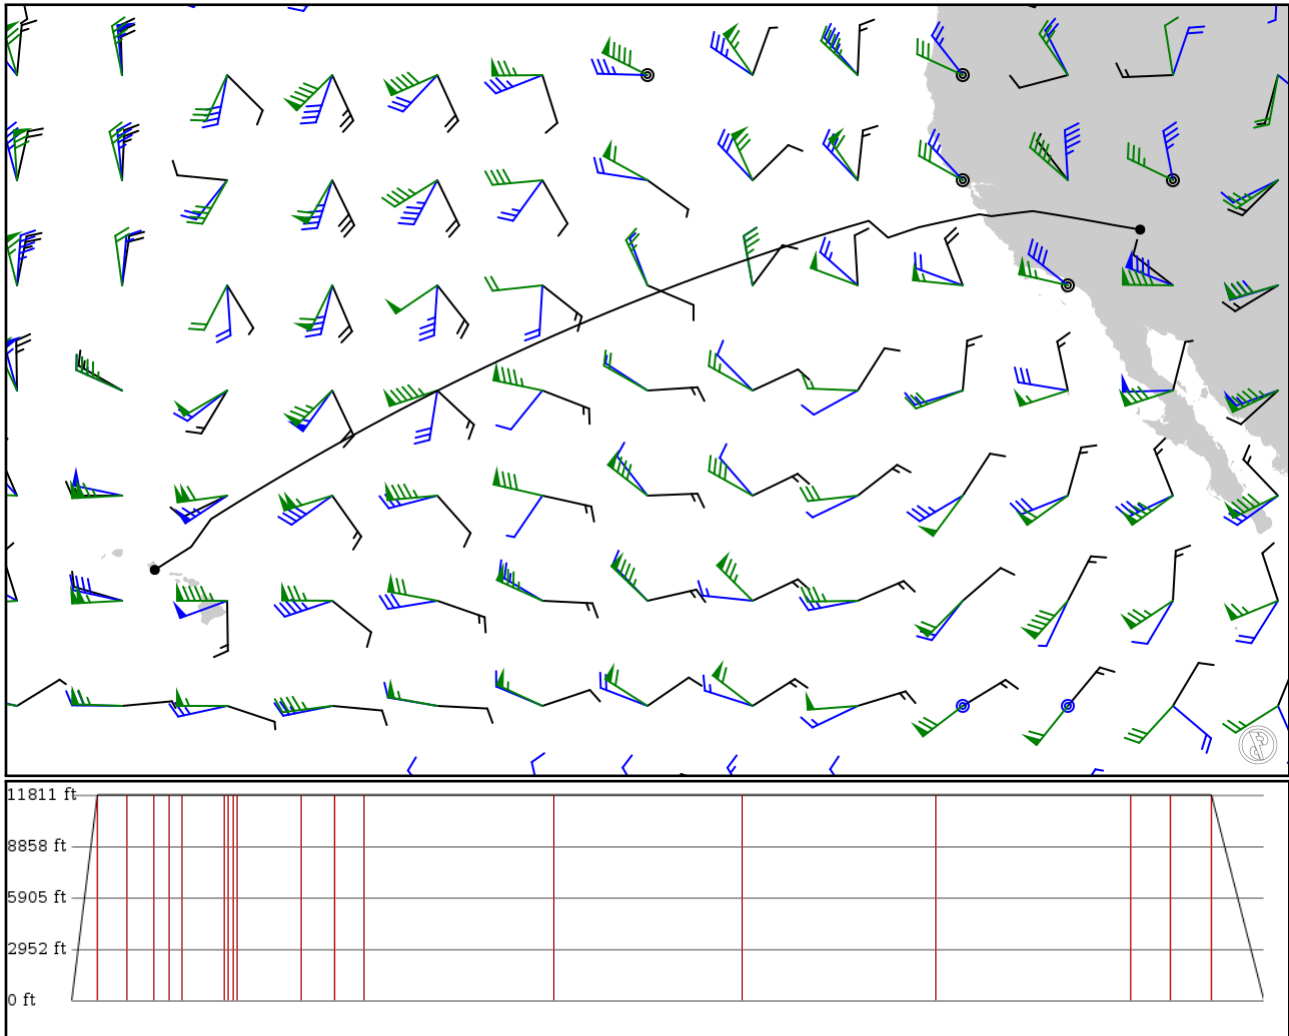

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 330kts
- Cruise Altitude: 3600ft
- Cruise Speed: 260kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAS APT	-	36.08070 -115.15300	0 ft 0 m	-	McCarran Intl
SHADO FIX	-	36.26370 -116.23100	3,600 ft 1,097 m	53	-
FURNY FIX	J110 AWY-HI	36.49010 -117.46200	3,600 ft 1,097 m	61	-
MITEL FIX	J110 AWY-HI	36.68440 -118.58400	3,600 ft 1,097 m	55	-
PINNI FIX	J110 AWY-HI	36.79780 -119.27200	3,600 ft 1,097 m	33	-
CZQ VOR	J110 AWY-HI	36.88430 -119.81500	3,600 ft 1,097 m	26	CLOVIS (FRESNO)
SNS VOR	J110 AWY-HI	36.66380 -121.60300	3,600 ft 1,097 m	87	SALINAS
JEJZE FIX	V230 AWY-LO	36.68920 -121.76600	3,600 ft 1,097 m	7	-
ISIFU FIX	V230 AWY-LO	36.71750 -121.94900	3,600 ft 1,097 m	8	-
SHOEY FIX	V230 AWY-LO	36.74600 -122.13600	3,600 ft 1,097 m	9	-
CINNY FIX	-	36.18170 -124.76000	3,600 ft 1,097 m	131	-
CREAN FIX	R465 AWY-HI	35.73170 -126.09500	3,600 ft 1,097 m	70	-
BAART FIX	-	36.46190 -126.93300	3,600 ft 1,097 m	59	-
BARAZ FIX	R464 AWY-HI	34.02310 -134.34600	3,600 ft 1,097 m	391	-
BILLO FIX	R464 AWY-HI	31.17830 -141.29000	3,600 ft 1,097 m	390	-
BEKME FIX	R464 AWY-HI	27.89220 -147.97000	3,600 ft 1,097 m	400	-
BOARD FIX	R464 AWY-HI	24.29580 -154.25000	3,600 ft 1,097 m	401	-
BITTA FIX	R464 AWY-HI	23.52800 -155.47900	3,600 ft 1,097 m	81	-
SOMOH FIX	R464 AWY-HI	22.32150 -156.34200	3,600 ft 1,097 m	86	-
PHNL APT	-	21.31940 -157.92100	0 ft 0 m	106	Daniel K. Inouye International Airport

KLAS

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 2,180 ft / 664 m
Location: 36.080700 -115.153000
Magnetic Var: 11.047 E

METAR

KLAS 160156Z 30009KT 10SM FEW120 FEW250 36/M09 A2966 RMK A02 SLP017 T03561094

TAF

KLAS 152320Z 1600/1706 34007KT P6SM FEW120 TEMPO 1604/1607 03010G17KT FM161200 VRB05KT P6SM SKC FM161700 05006KT

Frequencies

REC - 132.40 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.10 MHz - LAS VEGAS GROUND
GND - 121.90 MHz - LAS VEGAS GROUND	TWR - 128.80 MHz - LAS VEGAS TOWER
TWR - 118.75 MHz - LAS VEGAS TOWER	TWR - 119.90 MHz - LAS VEGAS TOWER
APP - 125.60 MHz - LAS VEGAS APPROACH	APP - 125.02 MHz - LAS VEGAS APPROACH
DEP - 125.90 MHz - LAS VEGAS DEPARTURE	DEP - 133.95 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.88		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.91		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.87		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.90		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.77		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.78		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.79		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.78		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.88		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.89		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.78		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.88		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.89		2,180 m

PHNL

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 4

Elevation: 13 ft / 4 m
Location: 21.319400 -157.921000
Magnetic Var: 9.258 E

METAR

PHNL 160153Z 19014G22KT 10SM FEW022 SCT032 BKN041 27/22 A2985

TAF

TAF PHNL 152320Z 1600/1706 19011KT P6SM VCSH FEW020 BKN040 FM160600 19008KT 5SM SHRA BR SCT015 OVC030 FM161700 180

Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.58		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.75		0 m	212 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m