


2024/05/04 2232Z

KFMN DEXTR KFLG

196.09 nm / 363.17 km

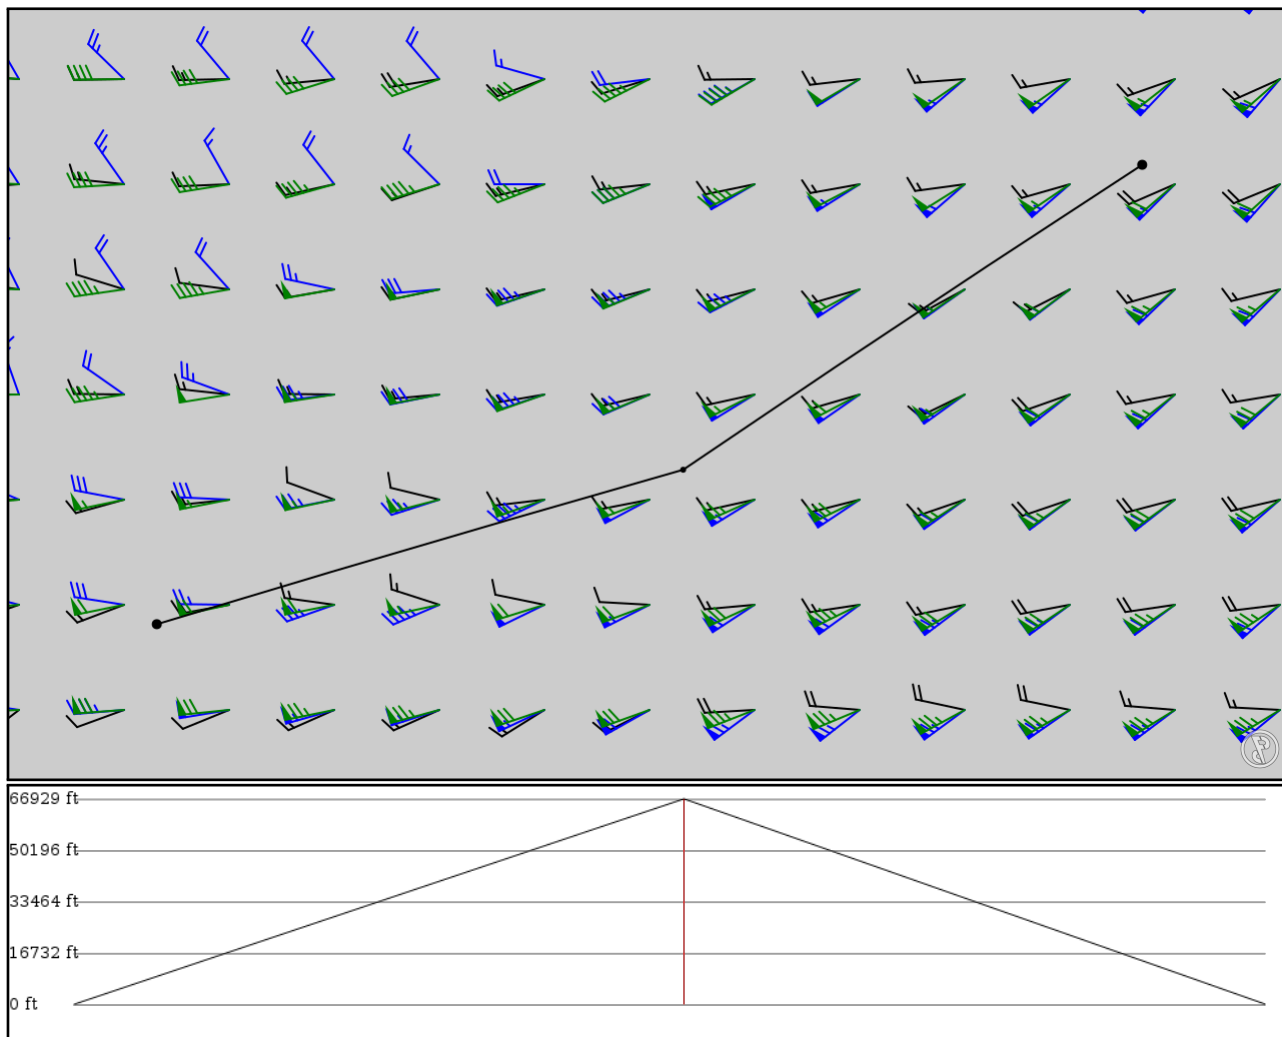

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFMN APT	-	36.74280 -108.23000	0 ft 0 m	-	FOUR CORNERS RGNL
DEXTR FIX	-	35.67910 -109.83200	20,400 ft 6,218 m	100	-
KFLG APT	-	35.14030 -111.66900	0 ft 0 m	95	Flagstaff Pulliam

KFMN

Region: UNITED STATES
Timezone: AMERICA/DENVER
Runways: 3

Elevation: 5,505 ft / 1,678 m
Location: 36.742800 -108.230000
Magnetic Var: 8.772 E

METAR

KFMN 042153Z 18013G25KT 10SM FEW120 24/M09 A2986 RMK A02 PK WND 17029/2130 SLP069 T02441089

TAF

KFMN 041727Z 0418/0518 07006KT P6SM SCT110 FM041900 19011KT P6SM SCT110 SCT200 TEMPO 0420/0424 19011G21KT FM05030

Frequencies

REC - 127.15 MHz - ATIS
COM - 122.95 MHz - UNICOM
TWR - 118.90 MHz - FARMINGTON TWR
COM - 118.90 MHz - CTAF
GND - 121.70 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	100 ft	6,689 ft	88.29	ASPHALT	240 ft	62 ft
	30 m	2,039 m	79.52		73 m	19 m
25	100 ft	6,689 ft	268.31	ASPHALT	187 ft	49 ft
	30 m	2,039 m	259.53		57 m	15 m
05	150 ft	6,490 ft	64.56	ASPHALT	0 ft	0 ft
	46 m	1,978 m	55.78		0 m	0 m
23	150 ft	6,490 ft	244.57	ASPHALT	125 ft	0 ft
	46 m	1,978 m	235.80		38 m	0 m
11	100 ft	2,780 ft	122.80	DIRT	0 ft	0 ft
	30 m	847 m	114.03		0 m	0 m
29	100 ft	2,780 ft	302.81	DIRT	0 ft	0 ft
	30 m	847 m	294.04		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	IFMN	111.90 MHz	18 nm	-	-	5,488 ft
				33 km	-		5,488 m
25	LOC-ILS	IFMN	111.90 MHz	18 nm	268.29	-	5,473 ft
				33 km	259.52		5,473 m
25	GS	IFMN	111.90 MHz	10 nm	268.60	3.00	5,505 ft
				19 km	259.83		5,505 m

KFLG

Region: UNITED STATES
Timezone: AMERICA/PHOENIX
Runways: 1

Elevation: 7,011 ft / 2,137 m
Location: 35.140300 -111.669000
Magnetic Var: 9.854 E

METAR

KFLG 042157Z 22021G31KT 10SM CLR 19/M06 A2999 RMK A02 PK WND 21031/2148 SLP083 T01891061

TAF

KFLG 041735Z 0418/0518 21015G25KT P6SM FEW100 FM050300 22012G20KT P6SM BKN180 FM051400 22025G35KT P6SM FEW050 SCT

Frequencies

REC - 125.80 MHz - ATIS
COM - 122.95 MHz - UNICOM
TWR - 134.55 MHz -
COM - 134.55 MHz - CTAF
GND - 121.90 MHz -
APP - 126.37 MHz - PHX APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	150 ft	8,795 ft	41.03	ASPHALT	0 ft	213 ft
	46 m	2,681 m	31.18		0 m	65 m
21	150 ft	8,795 ft	221.04	ASPHALT	1,804 ft	200 ft
	46 m	2,681 m	211.19		550 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
21	LOC-ILS	IFLG	110.50 MHz	18 nm	221.04	-	7,011 ft
				33 km	211.19		7,011 m
21	GS	IFLG	110.50 MHz	10 nm	221.04	3.00	7,011 ft
				19 km	211.19		7,011 m