

CYMX

Montreal Mirabel Intl


KORD

Chicago O'Hare International

2024/05/29 0150Z

CYMX DESKI **Q824** FNT **J547** PMM KORD

643.30 nm / 1191.40 km

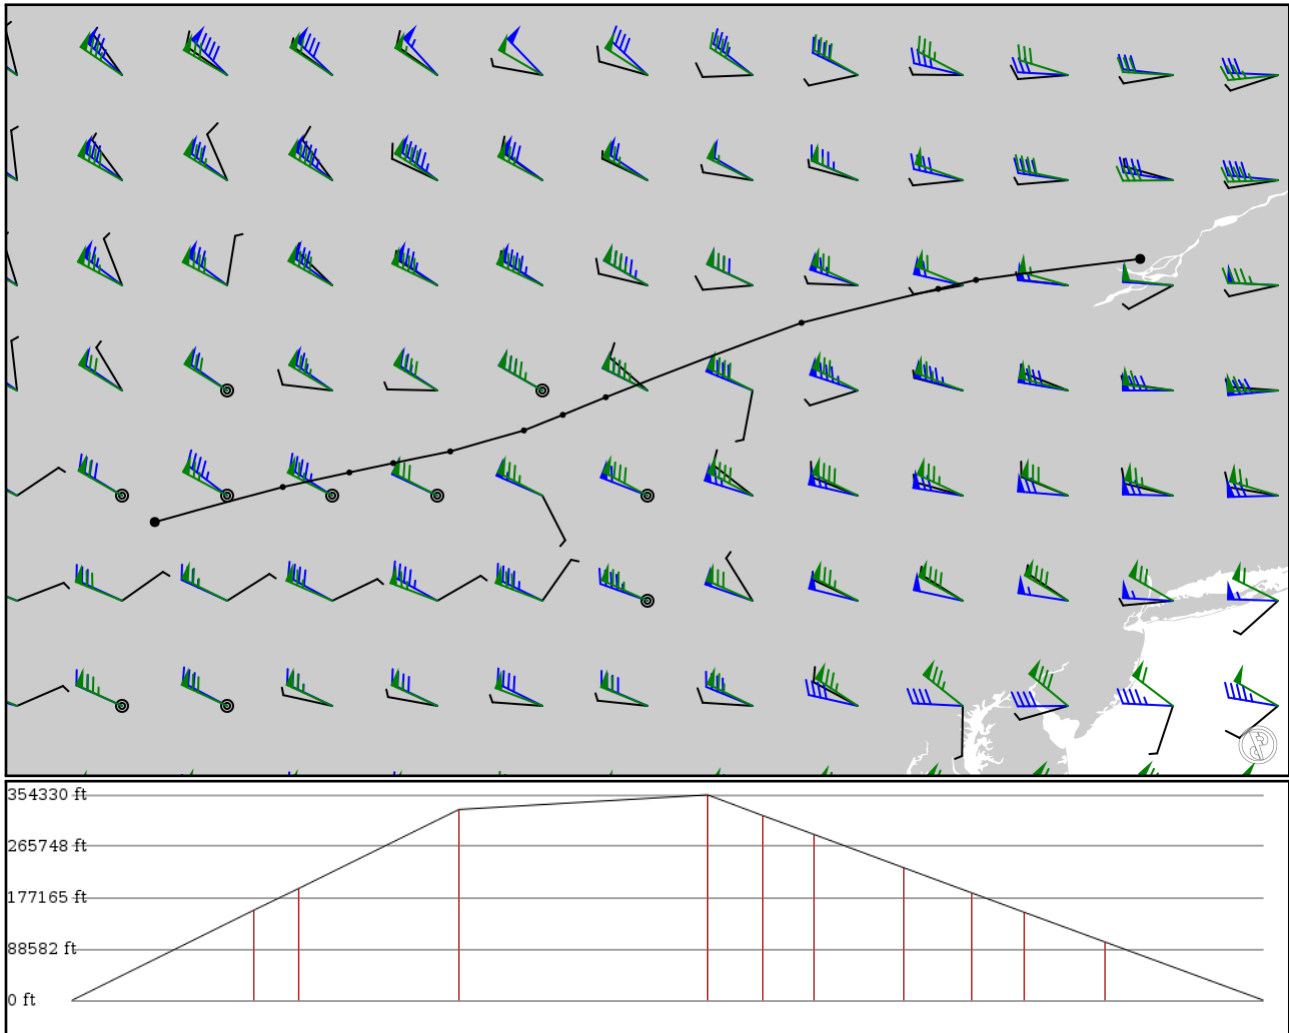

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 200kts
- Cruise Altitude: 800000ft
- Cruise Speed: 250kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
CYMX APT	-	45.67520 -74.03540	0 ft 0 m	-	Montreal Mirabel Intl
DESKI FIX	-	45.37920 -76.34670	47,400 ft 14,448 m	98	-
ILEMU FIX	Q824 AWY-HI	45.25420 -76.87890	58,800 ft 17,922 m	23	-
MENKO FIX	Q824 AWY-HI	44.77670 -78.80330	100,300 ft 30,571 m	86	-
GOUP FIX	Q824 AWY-HI	43.72970 -81.55810	108,000 ft 32,918 m	134	-
TAGUM FIX	Q824 AWY-HI	43.48170 -82.16290	97,100 ft 29,596 m	30	-
HOCKE FIX	Q824 AWY-HI	43.26210 -82.71060	87,200 ft 26,579 m	27	-
FNT VOR	Q824 AWY-HI	42.96680 -83.74700	69,700 ft 21,245 m	48	FLINT
DEWIT FIX	J547 AWY-HI	42.80250 -84.55000	56,500 ft 17,221 m	36	-
HASTE FIX	J547 AWY-HI	42.67100 -85.16740	46,300 ft 14,112 m	28	-
PMM VOR	J547 AWY-HI	42.46600 -86.10480	30,700 ft 9,357 m	43	PULLMAN
KORD APT	-	41.97340 -87.90660	0 ft 0 m	85	Chicago O'Hare International

CYMX

Region: CANADA
Timezone: AMERICA/MONTREAL
Runways: 2

Elevation: 270 ft / 82 m
Location: 45.675200 -74.035400
Magnetic Var: 13.813 W

METAR

CYMX 290100Z 31003KT 200V340 25SM -SHRA SCT043 OVC088 15/12 A2974 RMK SC3AC5 CVCTV CLD EMBD SLP073 DENSITY ALT 600

TAF

TAF CYMX 282340Z 2900/2924 31010G20KT P6SM SCT020 BKN040 TEMPO 2900/2903 P6SM -SHRA BKN020 OVC040 FM290300 33005K

Frequencies

REC - 125.70 MHz - ATIS
APP - 124.65 MHz -

COM - 119.10 MHz - MIRABEL RADIO
DEP - 124.65 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	200 ft	11,992 ft	44.87	CONCRETE	0 ft	200 ft
	61 m	3,655 m	58.68		0 m	61 m
24	200 ft	11,992 ft	224.89	CONCRETE	0 ft	200 ft
	61 m	3,655 m	238.70		0 m	61 m
11	200 ft	11,969 ft	98.45	CONCRETE	0 ft	148 ft
	61 m	3,648 m	112.26		0 m	45 m
29	200 ft	11,969 ft	278.48	CONCRETE	0 ft	148 ft
	61 m	3,648 m	292.29		0 m	45 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IKP	111.30 MHz	18 nm	44.88	-	270 ft
				33 km	58.69		270 m
11	LOC-ILS	IJX	110.90 MHz	18 nm	98.46	-	270 ft
				33 km	112.27		270 m
24	LOC-ILS	IIT	111.70 MHz	18 nm	224.88	-	270 ft
				33 km	238.69		270 m
06	GS	IKP	111.30 MHz	10 nm	44.88	3.00	270 ft
				19 km	58.69		270 m
11	GS	IJX	110.90 MHz	10 nm	98.46	3.00	270 ft
				19 km	112.27		270 m
24	GS	IIT	111.70 MHz	10 nm	224.88	3.00	270 ft
				19 km	238.69		270 m

KORD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 6

Elevation: 680 ft / 207 m
Location: 41.973400 -87.906600
Magnetic Var: 4.114 W

METAR

KORD 290051Z 30005KT 10SM FEW027 SCT070 SCT130 SCT250 15/12 A2998 RMK A02 SLP151 T01500117

TAF

TAF KORD 282320Z 2900/3006 33012KT P6SM -SHRA VCTS SCT035 BKN050CB FM290100 35011KT P6SM VCSH SCT025 BKN040 FM290800 30005KT 10SM FEW027 SCT070 SCT130 SCT250 15/12 A2998 RMK A02 SLP151 T01500117

Frequencies

REC - 135.40 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.25 MHz - CLEARANCE DELIVERY	CLD - 121.60 MHz - CLEARANCE DELIVERY
GND - 118.05 MHz - O'HARE GROUND	GND - 121.67 MHz - O'HARE GROUND
GND - 121.75 MHz - O'HARE GROUND	GND - 121.90 MHz - O'HARE GROUND
GND - 124.12 MHz - O'HARE GROUND	GND - 134.12 MHz - O'HARE GROUND
TWR - 120.75 MHz - O'HARE TOWER	TWR - 121.15 MHz - O'HARE TOWER
TWR - 126.90 MHz - O'HARE TOWER	TWR - 127.92 MHz - O'HARE TOWER
TWR - 132.70 MHz - O'HARE TOWER	TWR - 128.15 MHz - O'HARE TOWER
TWR - 133.00 MHz - O'HARE TOWER	APP - 119.00 MHz - CHICAGO APPROACH
APP - 133.62 MHz - CHICAGO APPROACH	APP - 124.35 MHz - CHICAGO APPROACH
APP - 125.70 MHz - CHICAGO APPROACH	DEP - 125.00 MHz - CHICAGO DEPARTURE
DEP - 125.40 MHz - CHICAGO DEPARTURE	DEP - 127.40 MHz - CHICAGO DEPARTURE
DEP - 128.80 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10C	200 ft	10,789 ft	89.85	CONCRETE	0 ft	397 ft
	61 m	3,289 m	93.96		0 m	121 m
28C	200 ft	10,789 ft	269.88	CONCRETE	0 ft	381 ft
	61 m	3,289 m	273.99		0 m	116 m
10L	151 ft	12,996 ft	89.87	CONCRETE	0 ft	394 ft
	46 m	3,961 m	93.99		0 m	120 m
28R	151 ft	12,996 ft	269.91	CONCRETE	0 ft	285 ft
	46 m	3,961 m	274.02		0 m	87 m
04R	151 ft	8,074 ft	41.40	CONCRETE	0 ft	850 ft
	46 m	2,461 m	45.51		0 m	259 m
22L	151 ft	8,074 ft	221.41	CONCRETE	0 ft	584 ft
	46 m	2,461 m	225.53		0 m	178 m
09R	151 ft	7,949 ft	89.98	CONCRETE	0 ft	148 ft
	46 m	2,423 m	94.09		0 m	45 m
27L	151 ft	7,949 ft	270.00	CONCRETE	0 ft	197 ft
	46 m	2,423 m	274.11		0 m	60 m
09L	151 ft	7,484 ft	89.99	CONCRETE	0 ft	397 ft
	46 m	2,281 m	94.10		0 m	121 m
27R	151 ft	7,484 ft	270.00	CONCRETE	0 ft	397 ft
	46 m	2,281 m	274.12		0 m	121 m
10R	151 ft	7,484 ft	89.85	CONCRETE	0 ft	400 ft
	46 m	2,281 m	93.97		0 m	122 m
28L	151 ft	7,484 ft	269.87	CONCRETE	0 ft	400 ft
	46 m	2,281 m	273.98		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	ISAJ	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
10L	DME	IMED	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
27L	DME	IIAC	110.50 MHz	18 nm	-	-	641 ft
				33 km	-		641 m
27R	DME	IABU	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
28R	DME	ITSL	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
04R	LOC-ILS	IFJU	110.10 MHz	18 nm	41.41	-	680 ft
				33 km	45.52		680 m
09L	LOC-ILS	ISAJ	111.75 MHz	18 nm	90.00	-	680 ft
				33 km	94.11		680 m
09R	LOC-ILS	IJAV	110.50 MHz	18 nm	89.99	-	680 ft
				33 km	94.10		680 m
10L	LOC-ILS	IMED	111.10 MHz	18 nm	89.89	-	680 ft
				33 km	94.00		680 m
10C	LOC-ILS	ISXH	108.95 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
10R	LOC-ILS	IIZJ	110.75 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
22L	LOC-ILS	ILQQ	110.10 MHz	18 nm	221.41	-	680 ft
				33 km	225.52		680 m
27L	LOC-ILS	IIAC	110.50 MHz	18 nm	269.99	-	680 ft
				33 km	274.10		680 m
27R	LOC-ILS	IABU	111.75 MHz	18 nm	270.00	-	680 ft
				33 km	274.11		680 m
28L	LOC-ILS	IVQX	110.75 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28C	LOC-ILS	IVZE	108.95 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28R	LOC-ILS	ITSL	111.10 MHz	18 nm	269.88	-	680 ft
				33 km	273.99		680 m
04R	GS	IFJU	110.10 MHz	10 nm	41.41	3.00	680 ft
				19 km	45.52		680 m
09L	GS	ISAJ	111.75 MHz	10 nm	90.00	3.00	680 ft
				19 km	94.11		680 m
09R	GS	IJAV	110.50 MHz	10 nm	89.99	3.00	680 ft
				19 km	94.10		680 m
10L	GS	IMED	111.10 MHz	10 nm	89.89	3.00	680 ft
				19 km	94.00		680 m
10C	GS	ISXH	108.95 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
10R	GS	IIZJ	110.75 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
22L	GS	ILQQ	110.10 MHz	10 nm	221.41	3.00	680 ft
				19 km	225.52		680 m
27L	GS	IIAC	110.50 MHz	10 nm	269.99	3.00	680 ft
				19 km	274.10		680 m
27R	GS	IABU	111.75 MHz	10 nm	270.00	3.00	680 ft
				19 km	274.11		680 m
28L	GS	IVQX	110.75 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28C	GS	IVZE	108.95 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28R	GS	ITSL	111.10 MHz	10 nm	269.88	3.00	680 ft
				19 km	273.99		680 m