

OYSN

Sanaa International


OERK

King Khalid Intl

2024/05/28 2250Z

OYSN ELONA **G667** DEBAS OERK

593.47 nm / 1099.10 km

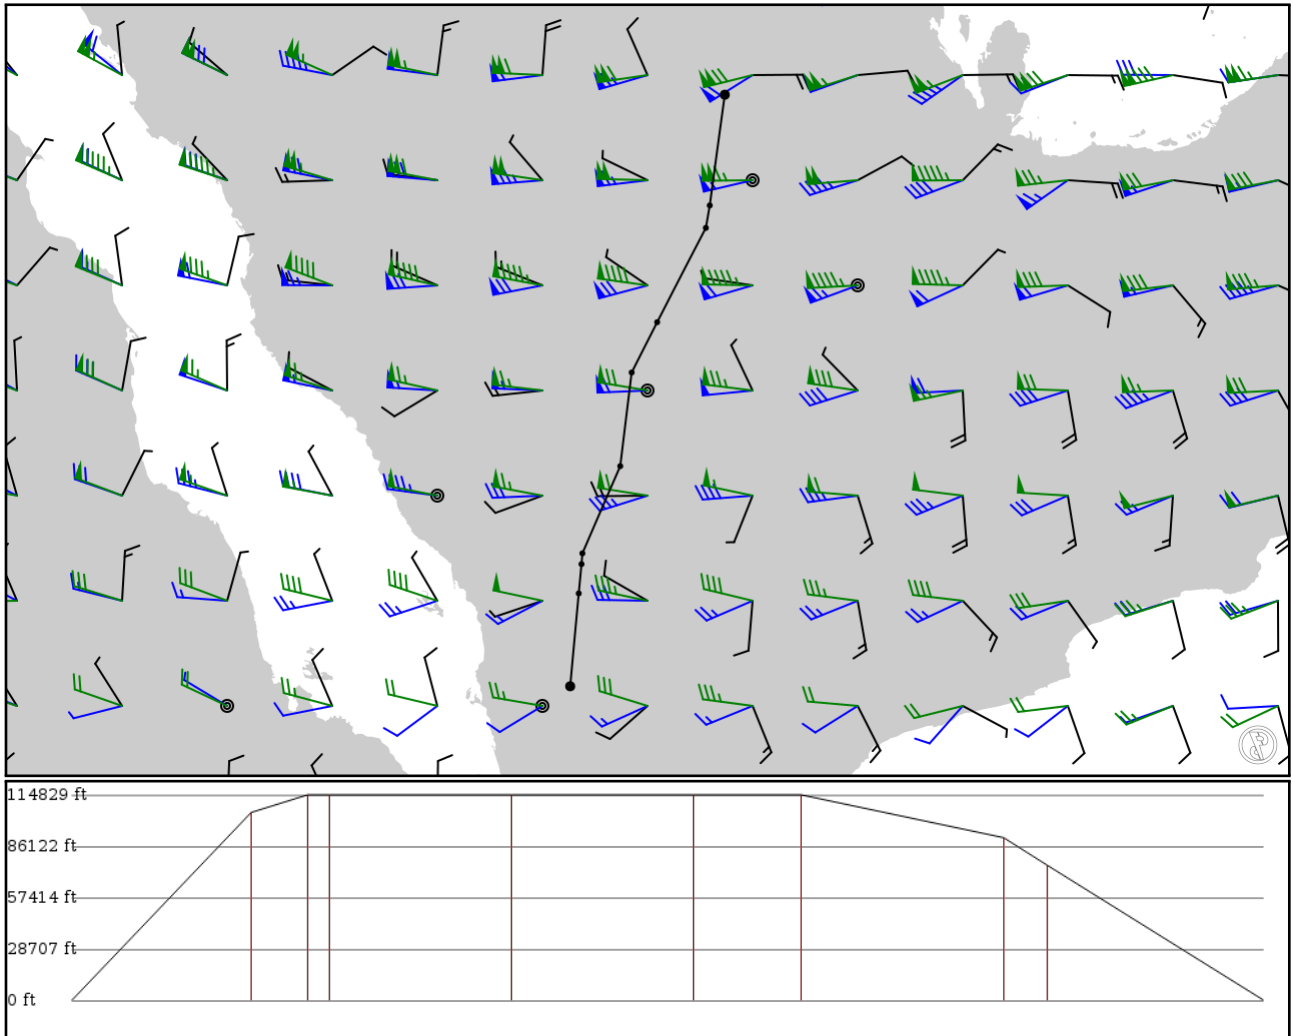

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OYSN	-	15.47630	0 ft	-	Sanaa International
APT	-	44.21970	0 m		
ELONA	-	16.96470	32,000 ft	89	-
FIX	-	44.35670	9,754 m		
NETAS	G667	17.43420	35,000 ft	28	-
FIX	AWY-HI	44.40110	10,668 m		
NEJ	G667	17.60690	35,000 ft	10	NEJРАН
VOR	AWY-HI	44.41560	10,668 m		
TASMU	G667	19.00450	35,000 ft	90	-
FIX	AWY-HI	45.02230	10,668 m		
WDR	G667	20.50530	35,000 ft	90	WADI AL DAWASIR
VOR	AWY-HI	45.20540	10,668 m		
TABNA	G667	21.31170	35,000 ft	53	-
FIX	AWY-HI	45.61460	10,668 m		
KITUB	G667	22.82280	27,700 ft	100	-
FIX	AWY-HI	46.39500	8,443 m		
DEBAS	G667	23.18310	23,000 ft	21	-
FIX	AWY-HI	46.45780	7,010 m		
OERK	-	24.95740	0 ft	107	King Khalid Intl
APT	-	46.69880	0 m		

OYSN

Region: YEMEN
Timezone: ASIA/ADEN
Runways: 1

Elevation: 7,215 ft / 2,199 m
Location: 15.476300 44.219700
Magnetic Var: 2.476 E

METAR

UNKNOWN

TAF

UNKNOWN

Frequencies

APP - 125.70 MHz - SANAA APPROACH
TWR - 118.90 MHz - TOWER

GND - 121.60 MHz - GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	148 ft	10,729 ft	179.70	ASPHALT	499 ft	0 ft
	45 m	3,270 m	177.23		152 m	0 m
36	148 ft	10,729 ft	359.70	ASPHALT	499 ft	0 ft
	45 m	3,270 m	357.23		152 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18	LOC-ILS	ISAN	110.90 MHz	18 nm	179.63	-	7,216 ft
				33 km	177.15		7,216 m
18	GS	ISAN	110.90 MHz	10 nm	180.27	3.00	7,216 ft
				19 km	177.80		7,216 m

OERK

Region: SAUDI ARABIA
Timezone: ASIA/RIYADH
Runways: 2

Elevation: 2,048 ft / 624 m
Location: 24.957400 46.698800
Magnetic Var: 3.354 E

METAR

OERK 282200Z 09003KT CAVOK 31/M02 Q1011 NOSIG

TAF

TAF OERK 281700Z 2818/2924 07006KT 7000 NSC BECMG 2822/2900 VRB03KT CAVOK BECMG 2906/2908 08008KT 7000 NSC

Frequencies

REC - 113.30 MHz - ATIS	CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.70 MHz - GROUND	GND - 121.60 MHz - GROUND
TWR - 118.60 MHz - TOWER	TWR - 118.80 MHz - TOWER
APP - 124.10 MHz - RIYADH APPROACH	APP - 120.00 MHz - RIYADH APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	197 ft	13,809 ft	150.17	CONCRETE	0 ft	387 ft
	60 m	4,209 m	146.81		0 m	118 m
33L	197 ft	13,809 ft	330.18	CONCRETE	0 ft	384 ft
	60 m	4,209 m	326.82		0 m	117 m
15L	197 ft	13,809 ft	150.18	CONCRETE	0 ft	390 ft
	60 m	4,209 m	146.82		0 m	119 m
33R	197 ft	13,809 ft	330.19	CONCRETE	0 ft	390 ft
	60 m	4,209 m	326.83		0 m	119 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15L	DME	IELF	109.50 MHz	18 nm	-	-	2,049 ft
				33 km	-		2,049 m
15R	DME	ITIH	110.50 MHz	18 nm	-	-	2,047 ft
				33 km	-		2,047 m
33L	DME	IFAT	110.10 MHz	18 nm	-	-	2,023 ft
				33 km	-		2,023 m
33R	DME	IKIA	109.10 MHz	18 nm	-	-	2,049 ft
				33 km	-		2,049 m
15L	LOC-ILS	IELF	109.50 MHz	18 nm	150.18	-	2,049 ft
				33 km	146.82		2,049 m
15R	LOC-ILS	ITIH	110.50 MHz	18 nm	150.17	-	2,046 ft
				33 km	146.82		2,046 m
33L	LOC-ILS	IFAT	110.10 MHz	18 nm	330.16	-	2,049 ft
				33 km	326.80		2,049 m
33R	LOC-ILS	IKIA	109.10 MHz	18 nm	330.18	-	2,049 ft
				33 km	326.82		2,049 m
15L	GS	IELF	109.50 MHz	10 nm	150.35	3.00	2,033 ft
				19 km	147.00		2,033 m
15R	GS	ITIH	110.50 MHz	10 nm	150.33	3.00	2,047 ft
				19 km	146.98		2,047 m
33L	GS	IFAT	110.10 MHz	10 nm	330.33	3.00	2,023 ft
				19 km	326.98		2,023 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
33R	GS	IKIA	109.10 MHz	10 nm	330.35	3.00	2,023 ft
				19 km	327.00		2,023 m