

KLIT

Adams Field/Bill and Hillary Clinton National


KSAT

San Antonio Intl

2024/05/15 0605Z

KLIT WASHO **V54** UIM **V18** CQY **V15** ACT **V17** CONRA KSAT

459.05 nm / 850.16 km

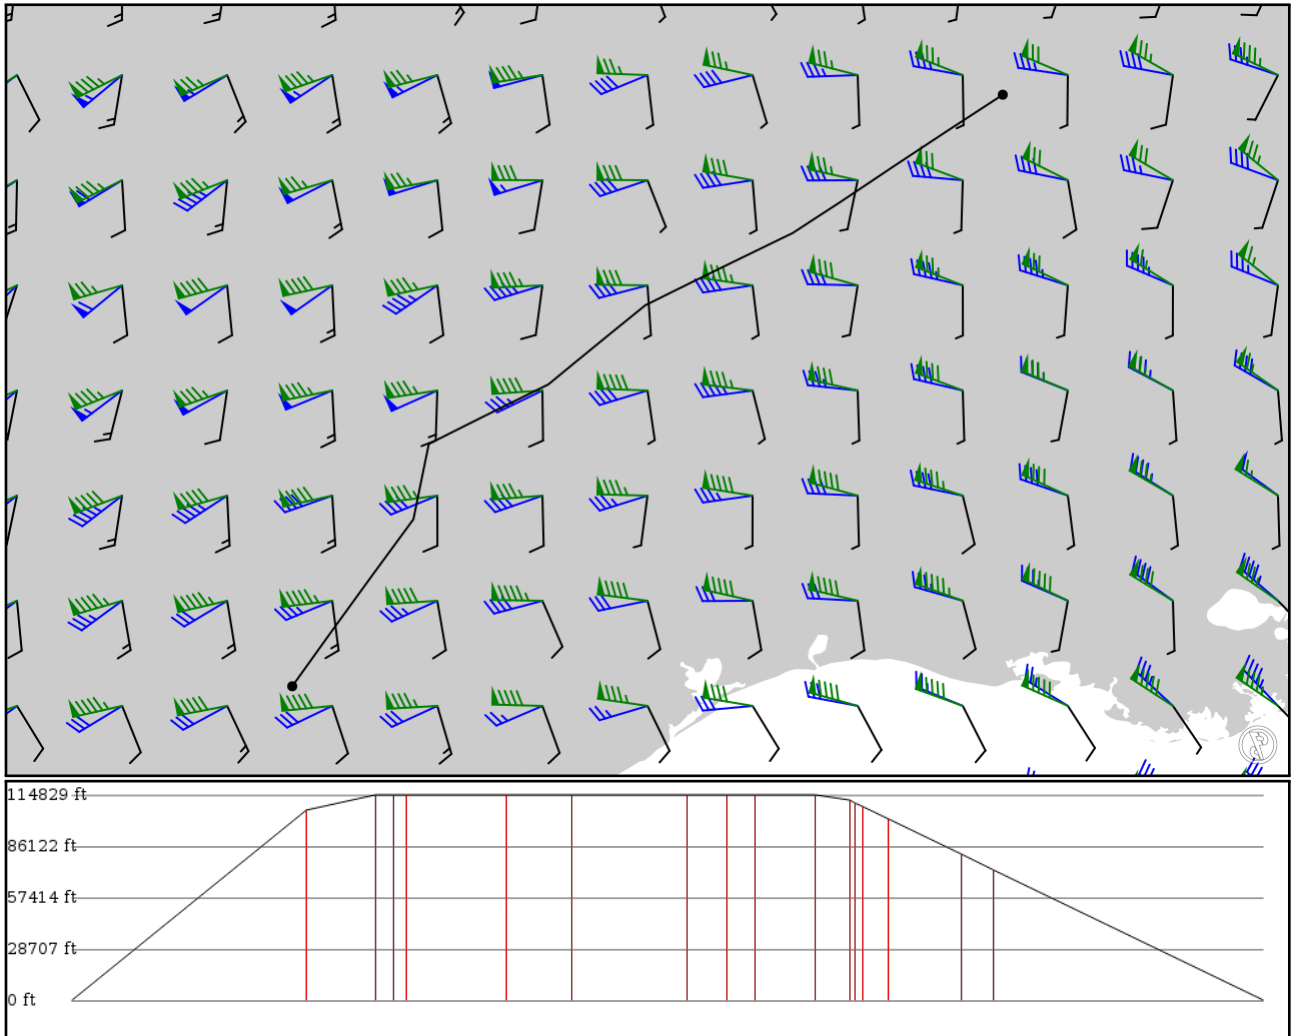

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
KLIT	-	34.72960	0 ft	-		Adams Field/Bill and Hillary Clinton National
APT	-	-92.22590	0 m			
WASHO	-	33.78580	32,400 ft	90	-	
FIX	-	-93.65540	9,876 m			
TXK	V54	33.51390	35,000 ft	26	TEXARKANA	
VOR	AWY-LO	-94.07320	10,668 m			
GUDEC	V54	33.45560	35,000 ft	6	-	
FIX	AWY-LO	-94.19420	10,668 m			
ZUKOS	V54	33.41630	35,000 ft	4	-	
FIX	AWY-LO	-94.27550	10,668 m			
HEBIP	V54	33.09200	35,000 ft	38	-	
FIX	AWY-LO	-94.93970	10,668 m			
UIM	V54	32.88050	35,000 ft	24	QUITMAN	
VOR	AWY-LO	-95.36690	10,668 m			
AWOLF	V18	32.36790	35,000 ft	44	-	
FIX	AWY-LO	-95.99690	10,668 m			
CQY	V18	32.18570	35,000 ft	15	CEDAR CREEK	
VOR	AWY-LO	-96.21810	10,668 m			
THING	V15	32.09620	35,000 ft	10	-	
FIX	AWY-LO	-96.39990	10,668 m			
DRILL	V15	31.89920	35,000 ft	23	-	
FIX	AWY-LO	-96.79700	10,668 m			
IMIPE	V15	31.78950	34,100 ft	12	-	
FIX	AWY-LO	-97.01640	10,394 m			
FEPHY	V15	31.77130	33,600 ft	2	-	
FIX	AWY-LO	-97.05270	10,241 m			
OVFAC	V15	31.74710	33,000 ft	2	-	
FIX	AWY-LO	-97.10070	10,058 m			
ACT	V15	31.66220	30,900 ft	9	WACO	
VOR	AWY-LO	-97.26900	9,418 m			
ROLAC	V17	31.20380	24,900 ft	27	-	
FIX	AWY-LO	-97.36300	7,590 m			
CONRA	V17	31.00130	22,200 ft	12	-	
FIX	AWY-LO	-97.40420	6,767 m			
KSAT	-	29.53410	0 ft	104	San Antonio Intl	
APT	-	-98.46930	0 m			

KLIT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 266 ft / 81 m
Location: 34.729600 -92.225900
Magnetic Var: 0.418 W

METAR

KLIT 150453Z 27006KT 10SM FEW047 BKN060 19/16 A2976 RMK A02 SLP077 T01940161

TAF

TAF KLIT 150520Z 1506/1606 29006KT P6SM SCT060 SCT250 TEMPO 1510/1514 5SM BR FM151500 31008KT P6SM SCT250

Frequencies

CLD - 118.95 MHz - ADAMS CLEARANCE DELIVERY	GND - 121.90 MHz - ADAMS GROUND
TWR - 118.70 MHz - ADAMS TOWER	REC - 125.65 MHz - ATIS
DEP - 119.50 MHz - LITTLE ROCK DEPARTURE	DEP - 135.40 MHz - LITTLE ROCK DEPARTURE
APP - 119.50 MHz - LITTLE ROCK APPROACH	APP - 135.40 MHz - LITTLE ROCK APPROACH
COM - 122.95 MHz - ADAMS UNICOM	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	151 ft	6,243 ft	181.51	CONCRETE	0 ft	0 ft
	46 m	1,903 m	181.93		0 m	0 m
36	151 ft	6,243 ft	1.51	CONCRETE	164 ft	194 ft
	46 m	1,903 m	1.93		50 m	59 m
04R	151 ft	8,259 ft	46.39	CONCRETE	1,056 ft	194 ft
	46 m	2,517 m	46.80		322 m	59 m
22L	151 ft	8,259 ft	226.40	CONCRETE	0 ft	400 ft
	46 m	2,517 m	226.82		0 m	122 m
04L	151 ft	8,282 ft	46.38	CONCRETE	305 ft	705 ft
	46 m	2,524 m	46.80		93 m	215 m
22R	151 ft	8,282 ft	226.39	CONCRETE	0 ft	200 ft
	46 m	2,524 m	226.81		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	ILIT	110.30 MHz	18 nm	-	-	265 ft
				33 km	-		265 m
04R	DME	ICNL	111.30 MHz	18 nm	-	-	254 ft
				33 km	-		254 m
22R	DME	IAAY	110.30 MHz	18 nm	-	-	265 ft
				33 km	-		265 m
04L	LOC-ILS	ILIT	110.30 MHz	18 nm	46.39	-	262 ft
				33 km	46.81		262 m
04R	LOC-ILS	ICNL	111.30 MHz	18 nm	46.39	-	262 ft
				33 km	46.81		262 m
22L	LOC-ILS	IBWY	110.70 MHz	18 nm	226.39	-	262 ft
				33 km	226.81		262 m
22R	LOC-ILS	IAAY	110.30 MHz	18 nm	226.39	-	262 ft
				33 km	226.81		262 m
04L	GS	ILIT	110.30 MHz	10 nm	46.39	3.00	262 ft
				19 km	46.81		262 m
04R	GS	ICNL	111.30 MHz	10 nm	46.39	3.00	262 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	46.81		262 m
22L	GS	IBWY	110.70 MHz	10 nm	226.39	3.00	262 ft
				19 km	226.81		262 m
22R	GS	IAAY	110.30 MHz	10 nm	226.39	3.00	262 ft
				19 km	226.81		262 m

KSAT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 809 ft / 247 m
Location: 29.534100 -98.469300
Magnetic Var: 3.528 E

METAR

KSAT 150451Z 16008KT 10SM CLR 26/14 A2986 RMK A02 SLP093 T02560144

TAF

TAF KSAT 150520Z 1506/1612 VRB05KT P6SM SKC FM151400 18007KT P6SM SCT250 FM151800 14014KT P6SM FEW050 SCT250 FM160000 10010KT P6SM SCT250

Frequencies

REC - 118.90 MHz - SAN ANTONIO ATIS	COM - 122.95 MHz - SAN ANTONIO UNICOM
GND - 121.90 MHz - SAN ANTONIO GROUND	TWR - 119.80 MHz - SAN ANTONIO TOWER
APP - 124.45 MHz - SAN ANTONIO APPROACH	APP - 128.05 MHz - SAN ANTONIO APPROACH
APP - 118.05 MHz - SAN ANTONIO APPROACH	APP - 125.10 MHz - SAN ANTONIO APPROACH
DEP - 124.45 MHz - SAN ANTONIO DEPARTURE	DEP - 128.05 MHz - SAN ANTONIO DEPARTURE
DEP - 118.05 MHz - SAN ANTONIO DEPARTURE	DEP - 125.10 MHz - SAN ANTONIO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	150 ft	8,516 ft	40.63	CONCRETE	0 ft	200 ft
	46 m	2,596 m	37.10		0 m	61 m
22	150 ft	8,516 ft	220.63	CONCRETE	0 ft	400 ft
	46 m	2,596 m	217.11		0 m	122 m
13R	150 ft	8,507 ft	131.75	CONCRETE	0 ft	210 ft
	46 m	2,593 m	128.22		0 m	64 m
31L	150 ft	8,507 ft	311.76	CONCRETE	0 ft	197 ft
	46 m	2,593 m	308.23		0 m	60 m
13L	100 ft	5,519 ft	131.78	ASPHALT	0 ft	154 ft
	30 m	1,682 m	128.25		0 m	47 m
31R	100 ft	5,519 ft	311.79	ASPHALT	0 ft	0 ft
	30 m	1,682 m	308.26		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13R	DME	IANT	110.90 MHz	18 nm	-	-	791 ft
				33 km	-		791 m
31L	DME	IIZR	110.90 MHz	18 nm	-	-	809 ft
				33 km	-		809 m
04	LOC-ILS	ISAT	109.70 MHz	18 nm	40.63	-	809 ft
				33 km	37.10		809 m
13R	LOC-ILS	IANT	110.90 MHz	18 nm	131.76	-	809 ft
				33 km	128.23		809 m
31L	LOC-ILS	IIZR	110.90 MHz	18 nm	311.76	-	809 ft
				33 km	308.23		809 m
04	GS	ISAT	109.70 MHz	10 nm	40.63	3.00	809 ft
				19 km	37.10		809 m
13R	GS	IANT	110.90 MHz	10 nm	131.76	3.00	809 ft
				19 km	128.23		809 m
31L	GS	IIZR	110.90 MHz	10 nm	311.76	3.00	809 ft
				19 km	308.23		809 m