

KMLB

Melbourne International Airport


KICT

Wichita Dwight D Eisenhower National

2024/05/07 1837Z

KMLB OCF **V159** CTY **J151** VUZ **J41** MEM MUDHO **Q128** VLUST RZC **J182** CHELI KICT

1042.13 nm / 1930.02 km

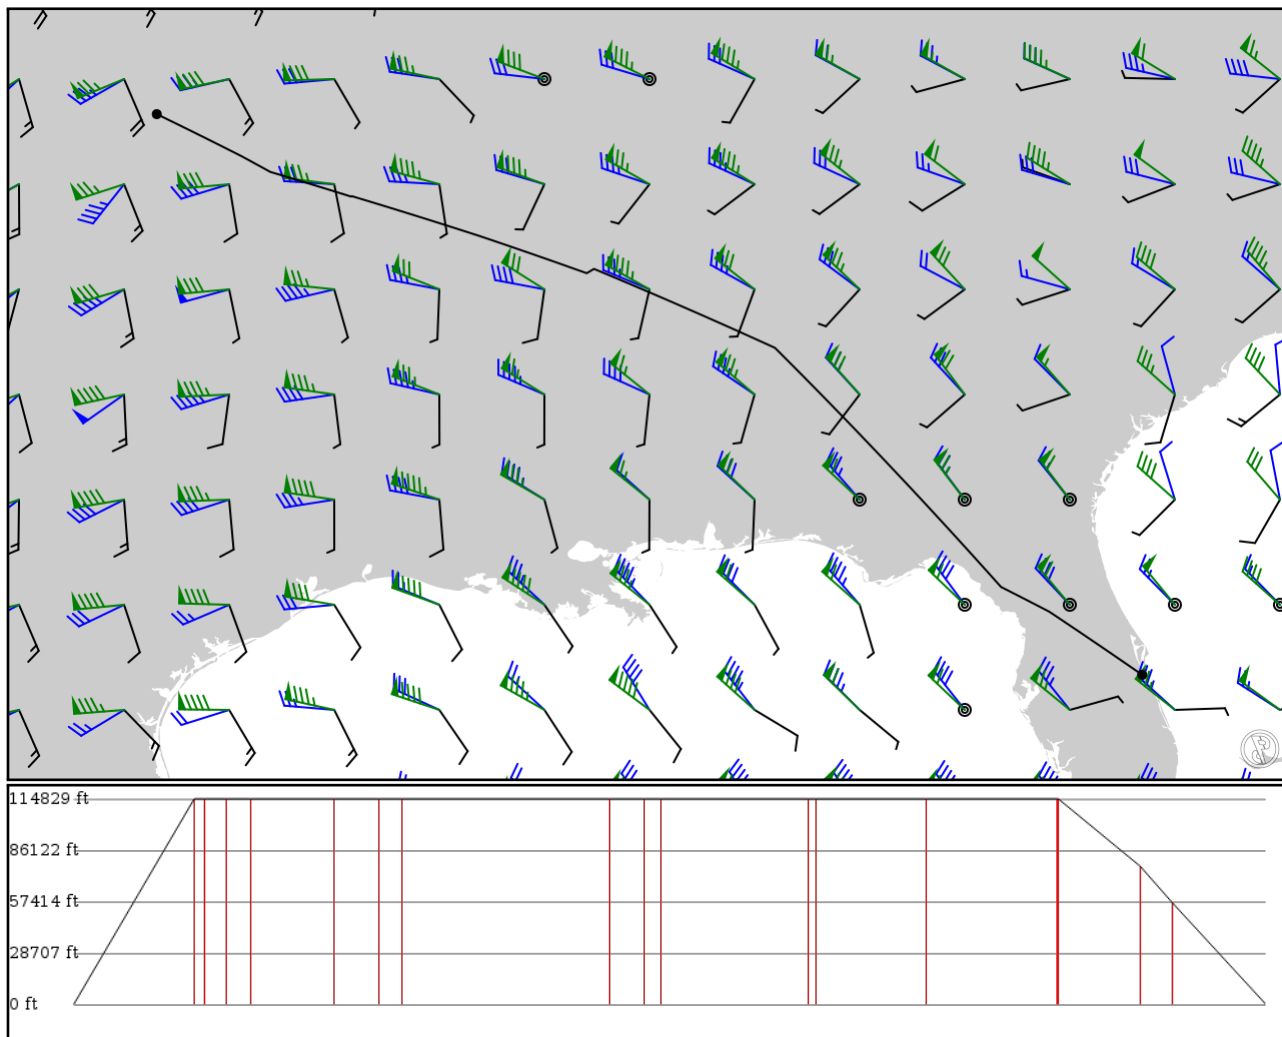

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KMLB	-	28.10230	0 ft	-		Melbourne International Airport
APT	-	-80.64340	0 m			
OCF	-	29.17750	35,000 ft	105		OCALA
VOR	-	-82.22630	10,668 m			
PERSE	V159	29.25440	35,000 ft	9	-	
FIX	AWY-LO	-82.37520	10,668 m			
WILON	V159	29.41780	35,000 ft	19	-	
FIX	AWY-LO	-82.69320	10,668 m			
CTY	V159	29.59900	35,000 ft	21		CROSS CITY
VOR	AWY-LO	-83.04880	10,668 m			
CAPPS	J151	30.54530	35,000 ft	72	-	
FIX	AWY-HI	-83.90500	10,668 m			
NEDDY	J151	31.06420	35,000 ft	39	-	
FIX	AWY-HI	-84.38380	10,668 m			
WYATT	J151	31.32290	35,000 ft	19	-	
FIX	AWY-HI	-84.62510	10,668 m			
VUZ	J151	33.67010	35,000 ft	182		VULCAN (BIRMINGHAM)
VOR	AWY-HI	-86.89980	10,668 m			
LOBBS	J41	33.90890	35,000 ft	29	-	
FIX	AWY-HI	-87.42720	10,668 m			
GOOGY	J41	34.02730	35,000 ft	14	-	
FIX	AWY-HI	-87.69210	10,668 m			
MEM	J41	35.01510	35,000 ft	127		MEMPHIS
VOR	AWY-HI	-89.98320	10,668 m			
MUDHO	-	34.94160	35,000 ft	7	-	
FIX	-	-90.10710	10,668 m			
ECIGE	Q128	35.56480	35,000 ft	95	-	
FIX	AWY-HI	-91.90230	10,668 m			
VLUST	Q128	36.25350	35,000 ft	114	-	
FIX	AWY-HI	-94.10740	10,668 m			
RZC	-	36.24640	35,000 ft	0		RAZORBACK (FAYETTEVILLE)
VOR	-	-94.12140	10,668 m			
COODY	J182	36.66720	23,500 ft	71	-	
FIX	AWY-HI	-95.50020	7,163 m			
CHELI	J182	36.93870	17,300 ft	28	-	
FIX	AWY-HI	-95.99710	5,273 m			
KICT	-	37.65020	0 ft	80		Wichita Dwight D Eisenhower National
APT	-	-97.43220	0 m			

KMLB

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 33 ft / 10 m
Location: 28.102300 -80.643400
Magnetic Var: 7.350 W

METAR

KMLB 071753Z 10013KT 10SM CLR 29/19 A2993 RMK A02 SLP134 T02940194 10311 20239 58014

TAF

KMLB 071739Z 0718/0818 11012KT P6SM SCT035 FM080200 15006KT P6SM FEW030 SCT070 FM081600 13006KT P6SM FEW050

Frequencies

COM - 122.95 MHz - MELBOURNE UNICOM
GND - 121.90 MHz - MELBOURNE GROUND
APP - 132.65 MHz - ORLANDO APPROACH

REC - 132.55 MHz - MELBOURNE ATIS
TWR - 118.20 MHz - MELBOURNE TOWER
DEP - 132.65 MHz - ORLANDO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	75 ft	3,004 ft	41.93	ASPHALT	0 ft	0 ft
	23 m	916 m	49.28		0 m	0 m
23	75 ft	3,004 ft	221.93	ASPHALT	0 ft	102 ft
	23 m	916 m	229.28		0 m	31 m
09L	150 ft	6,006 ft	86.87	ASPHALT	0 ft	0 ft
	46 m	1,831 m	94.22		0 m	0 m
27R	150 ft	6,006 ft	266.88	ASPHALT	0 ft	0 ft
	46 m	1,831 m	274.23		0 m	0 m
09R	150 ft	10,191 ft	86.86	ASPHALT	0 ft	102 ft
	46 m	3,106 m	94.21		0 m	31 m
27L	150 ft	10,191 ft	266.87	ASPHALT	699 ft	400 ft
	46 m	3,106 m	274.22		213 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	LOC-ILS	IMLB	108.30 MHz	18 nm	86.88	-	21 ft
				33 km	94.23		21 m
09R	GS	IMLB	108.30 MHz	10 nm	87.72	2.80	32 ft
				19 km	95.07		32 m

KICT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 1,333 ft / 406 m
Location: 37.650200 -97.432200
Magnetic Var: 3.004 E

METAR

KICT 071753Z 10SM FEW200 24/04 A2959 RMK AO2 SLP011 T02440044 10244 20083 58008

TAF

KICT 071724Z 0718/0818 24011KT P6SM SCT250 FM072000 22015G22KT P6SM SCT250 FM080100 16012KT P6SM BKN200 FM080700

Frequencies

REC - 125.15 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 125.70 MHz - CLNC DEL	GND - 121.90 MHz -
TWR - 118.20 MHz -	APP - 125.50 MHz -
APP - 126.70 MHz -	APP - 134.85 MHz -
DEP - 126.70 MHz -	DEP - 134.85 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	151 ft	10,318 ft	19.92	CONCRETE	0 ft	200 ft
	46 m	3,145 m	16.91		0 m	61 m
19R	151 ft	10,318 ft	199.93	CONCRETE	0 ft	200 ft
	46 m	3,145 m	196.92		0 m	61 m
01R	151 ft	7,311 ft	19.93	CONCRETE	0 ft	200 ft
	46 m	2,229 m	16.92		0 m	61 m
19L	151 ft	7,311 ft	199.93	CONCRETE	0 ft	200 ft
	46 m	2,229 m	196.93		0 m	61 m
14	151 ft	6,309 ft	150.10	CONCRETE	0 ft	0 ft
	46 m	1,923 m	147.10		0 m	0 m
32	151 ft	6,309 ft	330.11	CONCRETE	0 ft	0 ft
	46 m	1,923 m	327.10		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01R	DME	IICT	110.30 MHz	18 nm	-	-	1,327 ft
				33 km	-		1,327 m
19L	DME	MVP	111.55 MHz	18 nm	-	-	1,320 ft
				33 km	-		1,320 m
01L	LOC-ILS	ITWI	109.10 MHz	18 nm	19.93	-	1,333 ft
				33 km	16.93		1,333 m
01R	LOC-ILS	IICT	110.30 MHz	18 nm	19.93	-	1,333 ft
				33 km	16.93		1,333 m
19R	LOC-ILS	IHOV	110.50 MHz	18 nm	199.93	-	1,333 ft
				33 km	196.93		1,333 m
19L	LOC-LOC	MVP	111.55 MHz	18 nm	199.93	-	1,333 ft
				33 km	196.93		1,333 m
01L	GS	ITWI	109.10 MHz	10 nm	19.93	3.00	1,333 ft
				19 km	16.93		1,333 m
01R	GS	IICT	110.30 MHz	10 nm	19.93	2.80	1,333 ft
				19 km	16.93		1,333 m
19R	GS	IHOV	110.50 MHz	10 nm	199.93	3.00	1,333 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	196.93		1,333 m