


2024/06/07 0626Z

YPAD SPOTA **J58** WHA **J251** AS **A461** BOYDI **G326** ARG **J72** DN **M768** LADOP GABUS **G578** ZAM **A583** CH VHHH

4119.76 nm / 7629.79 km

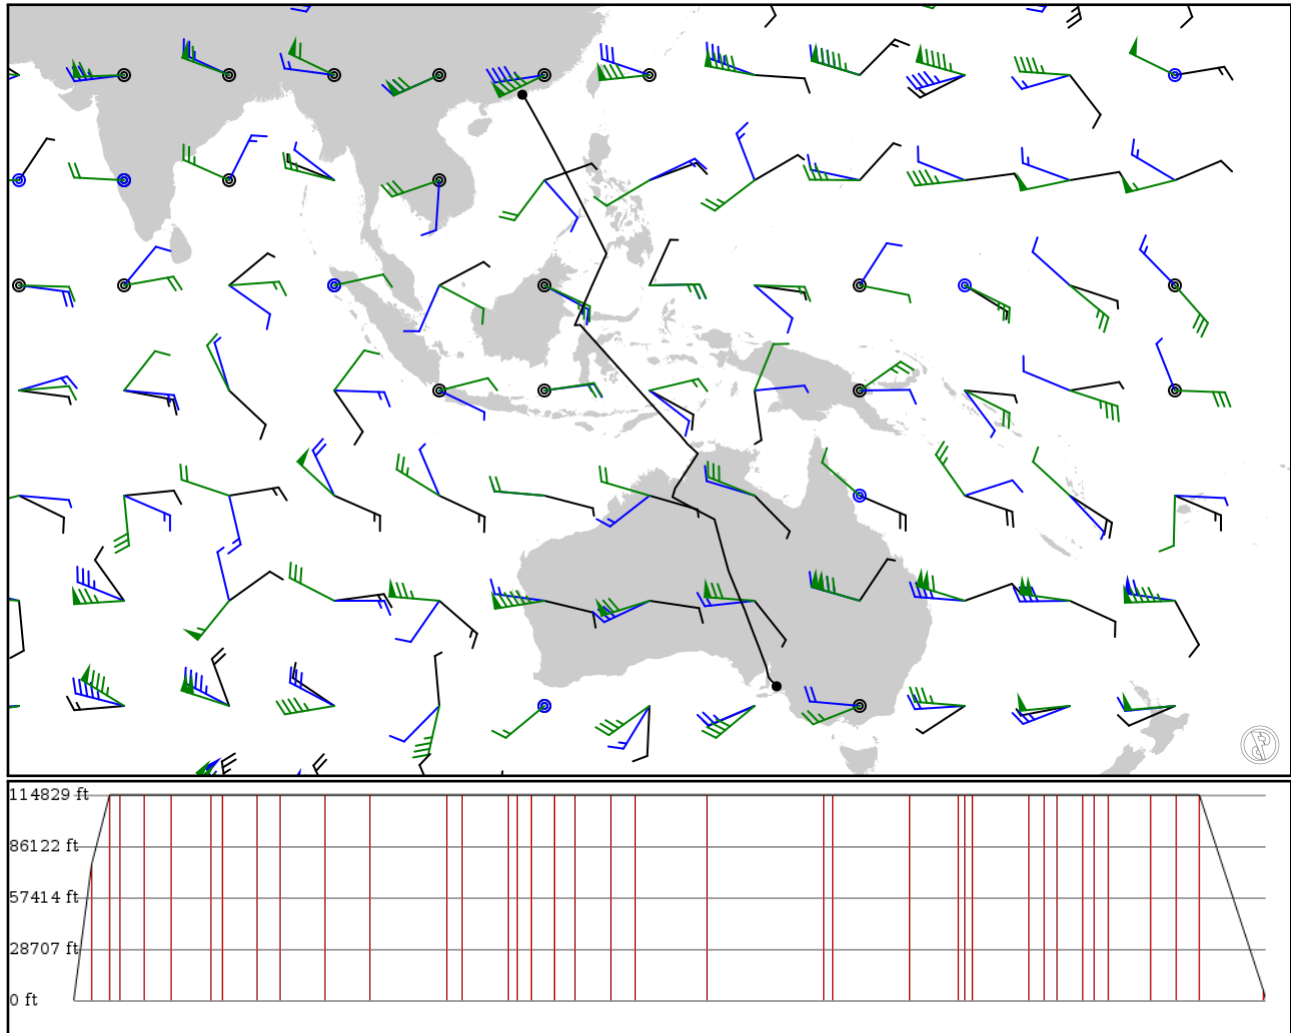

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
YPAD	-	-34.94740	0 ft	-	Adelaide Intl
APT	-	138.53000	0 m		
SPOTA	-	-34.07530	23,200 ft	65	-
FIX	-	137.74400	7,071 m		
WHA	J58	-33.05810	35,000 ft	62	WHYALLA
NDB	AWY-HI	137.52400	10,668 m		
OJJAY	J251	-32.47780	35,000 ft	36	-
FIX	AWY-HI	137.30400	10,668 m		
WR	J251	-31.14350	35,000 ft	84	WOOMERA
NDB	AWY-HI	136.80800	10,668 m		
CARTS	J251	-29.68780	35,000 ft	92	-
FIX	AWY-HI	136.23900	10,668 m		
GOMUL	J251	-27.55460	35,000 ft	134	-
FIX	AWY-HI	135.44200	10,668 m		
SARAH	J251	-26.92500	35,000 ft	40	-
FIX	AWY-HI	135.17000	10,668 m		
SADEL	J251	-25.04000	35,000 ft	120	-
FIX	AWY-HI	134.38300	10,668 m		
AS	J251	-23.79290	35,000 ft	79	ALICE SPRINGS
VOR	AWY-HI	133.87800	10,668 m		
DIGLA	A461	-21.30480	35,000 ft	154	-
FIX	AWY-HI	133.19100	10,668 m		
BOYDI	A461	-18.79560	35,000 ft	155	-
FIX	AWY-HI	132.52200	10,668 m		
ARG	G326	-16.63170	35,000 ft	266	ARGYLE
VOR	AWY-HI	128.44900	10,668 m		
KU	J72	-15.77560	35,000 ft	53	KUNUNURRA
VOR	AWY-HI	128.70900	10,668 m		
JULUP	J72	-13.55360	35,000 ft	158	-
FIX	AWY-HI	130.17400	10,668 m		
WANGI	J72	-13.12990	35,000 ft	30	-
FIX	AWY-HI	130.44900	10,668 m		
DN	J72	-12.42330	35,000 ft	50	DARWIN
VOR	AWY-HI	130.90600	10,668 m		
DONYA	M768	-11.51430	35,000 ft	80	-
FIX	AWY-HI	129.90700	10,668 m		
SHEPP	M768	-10.59940	35,000 ft	70	-
FIX	AWY-HI	129.15600	10,668 m		
ELBIS	M768	-9.08833	35,000 ft	123	-
FIX	AWY-HI	127.72800	10,668 m		
ADNAT	M768	-8.04770	35,000 ft	84	-
FIX	AWY-HI	126.77400	10,668 m		
PORAK	M768	-4.97746	35,000 ft	247	-
FIX	AWY-HI	124.00700	10,668 m		
LADOP	M768	0.02843	35,000 ft	403	-
FIX	AWY-HI	119.51100	10,668 m		
GABUS	-	-0.00880	35,000 ft	31	-
FIX	-	118.98600	10,668 m		
GORAI	G578	4.00000	35,000 ft	262	-
FIX	AWY-HI	120.73300	10,668 m		
TABUL	G578	6.54350	35,000 ft	167	-
FIX	AWY-HI	121.88200	10,668 m		
ZAM	G578	6.92469	35,000 ft	25	ZAMBOANGA

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VOR	AWY-HI	122.05500	10,668 m		
MASUN	A583	7.30043	35,000 ft	25	-
FIX	AWY-HI	121.87100	10,668 m		
MARAN	A583	10.23380	35,000 ft	196	-
FIX	AWY-HI	120.41600	10,668 m		
PALOS	A583	11.02850	35,000 ft	53	-
FIX	AWY-HI	120.01600	10,668 m		
TOKON	A583	11.70050	35,000 ft	45	-
FIX	AWY-HI	119.67500	10,668 m		
LEGED	A583	13.02030	35,000 ft	88	-
FIX	AWY-HI	119.00200	10,668 m		
REKEL	A583	13.59040	35,000 ft	38	-
FIX	AWY-HI	118.70900	10,668 m		
IBOBI	A583	14.31170	35,000 ft	48	-
FIX	AWY-HI	118.33600	10,668 m		
AKOTA	A583	16.46200	35,000 ft	144	-
FIX	AWY-HI	117.20700	10,668 m		
MAVRA	A583	17.77780	35,000 ft	88	-
FIX	AWY-HI	116.50200	10,668 m		
SABNO	A583	18.98500	35,000 ft	81	-
FIX	AWY-HI	115.84500	10,668 m		
CH	A583	22.21950	1,700 ft	219	CHEUNG CHAU
VOR	AWY-HI	114.03000	518 m		
VHHH	-	22.30890	0 ft	8	Hong Kong Intl
APT	-	113.91500	0 m		

YPAD

Region: AUSTRALIA
Timezone: AUSTRALIA/ADELAIDE
Runways: 2

Elevation: 20 ft / 6 m
Location: -34.947400 138.530000
Magnetic Var: 7.847 E

METAR

UNKNOWN

TAF

TAF TAF AMD YPAD 070524Z 0706/0812 21012KT 9999 SCT020 BKN030 FM070900 16006KT 9999 FEW018 BKN025 FM071400 04004K

Frequencies

REC - 116.40 MHz - ATIS	REC - 134.50 MHz - ATIS
CLD - 126.10 MHz - ADELAIDE DELIVERY	GND - 121.70 MHz - ADELAIDE GROUND
TWR - 120.50 MHz - ADELAIDE TOWER	APP - 124.20 MHz - ADELAIDE APPROACH
APP - 118.20 MHz - ADELAIDE APPROACH	DEP - 124.20 MHz - ADELAIDE DEPARTURE
DEP - 118.20 MHz - ADELAIDE DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	151 ft	10,170 ft	50.04	ASPHALT	492 ft	0 ft
	46 m	3,100 m	42.20		150 m	0 m
23	151 ft	10,170 ft	230.03	ASPHALT	0 ft	0 ft
	46 m	3,100 m	222.18		0 m	0 m
12	151 ft	5,417 ft	123.64	ASPHALT	0 ft	0 ft
	46 m	1,651 m	115.79		0 m	0 m
30	151 ft	5,417 ft	303.63	ASPHALT	0 ft	0 ft
	46 m	1,651 m	295.79		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
23	LOC-ILS	IAD	109.70 MHz	18 nm	230.03	-	20 ft
				33 km	222.19		20 m
23	GS	IAD	109.70 MHz	10 nm	230.03	3.00	20 ft
				19 km	222.19		20 m

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.242 W

METAR

VHHH 070600Z 10015KT 9999 -SHRA FEW010 SCT018 27/23 Q1007 TEMPO 4000 SHRA

TAF

TAF VHHH 070500Z 0706/0812 12010KT 9999 FEW010 SCT020 TX29/0706Z TX30/0806Z TN26/0722Z TEMPO 0706/0710 4000 SHRA

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.02		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m