

PANC

Ted Stevens Anchorage Intl


PAJN

Juneau Intl

2024/06/08 1850Z

PANC 6018N14425W 5851N13740W ASORT PAJN

501.22 nm / 928.27 km

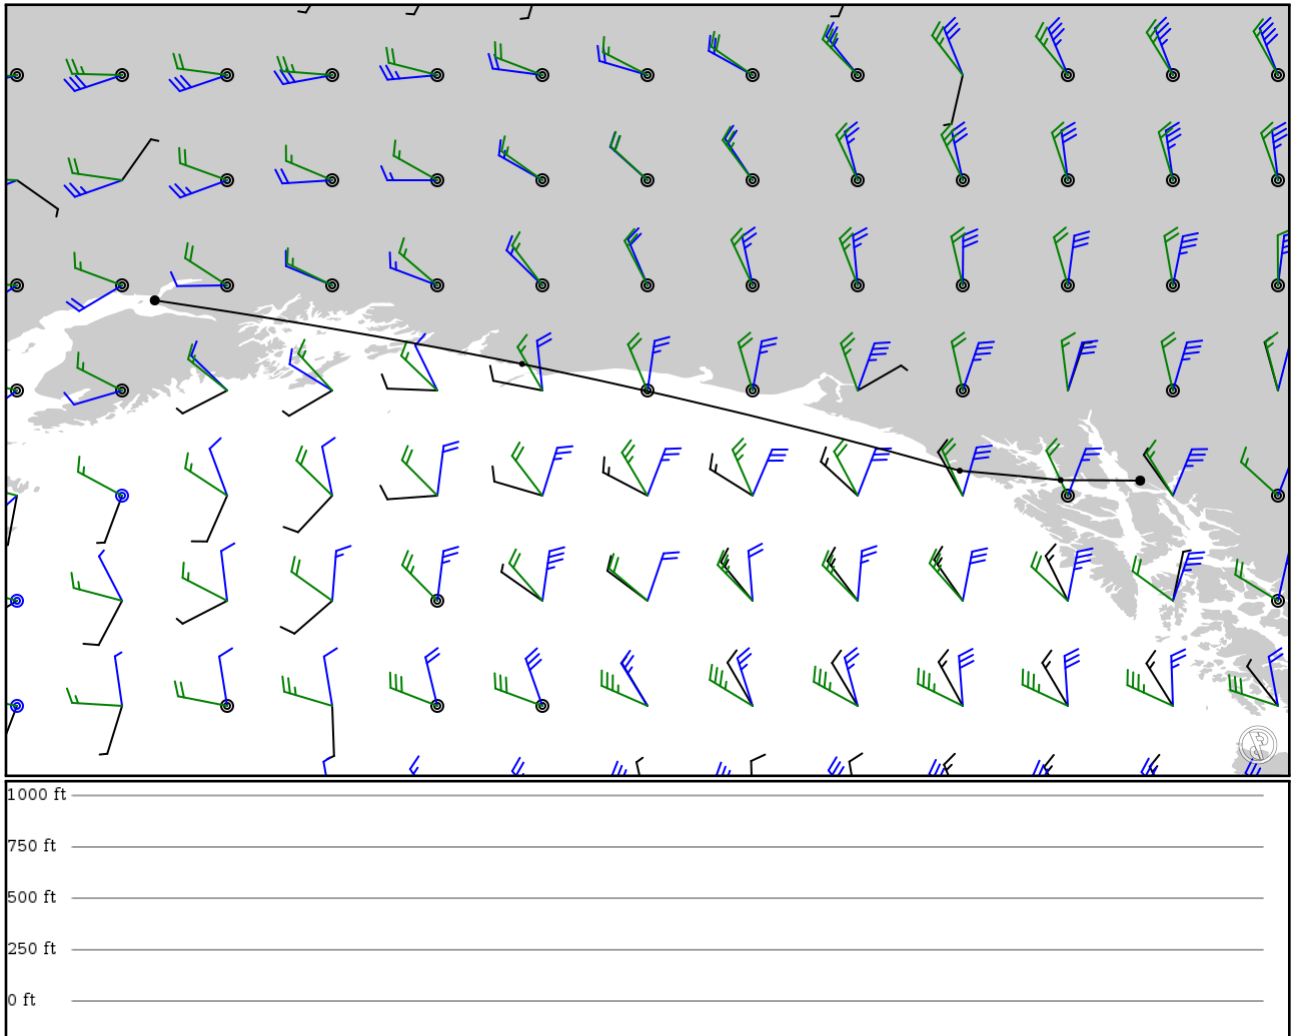

Notes

Requested: PANC 6018N14425W 5851N13740W ASORT PAJN

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC	-	61.17430	0 ft	-	Ted Stevens Anchorage Intl
APT	-	-149.99800	0 m		
6018N14425W	-	60.18000	0 ft	179	-
LATLON	-	-144.25000	0 m		
5851N13740W	-	58.51000	0 ft	232	-
LATLON	-	-137.40000	0 m		
ASORT	-	58.36270	0 ft	50	-
FIX	-	-135.82100	0 m		
PAJN	-	58.35500	0 ft	39	Juneau Intl
APT	-	-134.57600	0 m		

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 13.997 E

METAR

PANC 081753Z VRB03KT 10SM OVC160 12/07 A2987

TAF

TAF PANC 081738Z 0818/0924 34005KT P6SM BKN150 FM090400 14018G32KT P6SM BKN120 FM091400 13008KT P6SM SCT120 BKN200

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.84		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.90		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.88		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.93		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.89		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.91		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.90		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.87		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.90		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.90		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.87		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.90		151 m

PAJN

Region: USA (ALASKA)

Timezone: AMERICA/JUNEAU

Runways: 1

Elevation: 20 ft / 6 m

Location: 58.355000 -134.576000

Magnetic Var: 17.254 E

METAR

PAJN 081753Z 26007KT 10SM FEW150 BKN200 17/06 A2994

TAF

TAF PAJN 081726Z 0818/0918 23011KT P6SM SKC FM090900 VRB03KT P6SM BKN050

Frequencies

TWR - 118.70 MHz - JUNEAU TOWER

COM - 122.95 MHz - JUNEAU UNICOM

GND - 121.90 MHz - JUNEAU GROUND

REC - 135.20 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	8,867 ft	104.87	ASPHALT	220 ft	0 ft
	46 m	2,703 m	87.61		67 m	0 m
26	151 ft	8,867 ft	284.90	ASPHALT	217 ft	0 ft
	46 m	2,703 m	267.65		66 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IJDL	109.90 MHz	18 nm	-	-	175 ft
				33 km	-		175 m
08	LOC-LOC	IJDL	109.90 MHz	18 nm	84.92	-	21 ft
				33 km	67.67		21 m