

ZSAM

Xiamen - Gaoqi Intl.


ZBHD

Handan

2024/06/14 1659Z

ZSAM KADUG 2600N11700E NF 2800N11600E RP **W19** NCH **W105** XSH **W518** HG **W517** HOK **A461** OBLIK **W129** CGO
B208 DUBAG ZBHD

800.73 nm / 1482.95 km

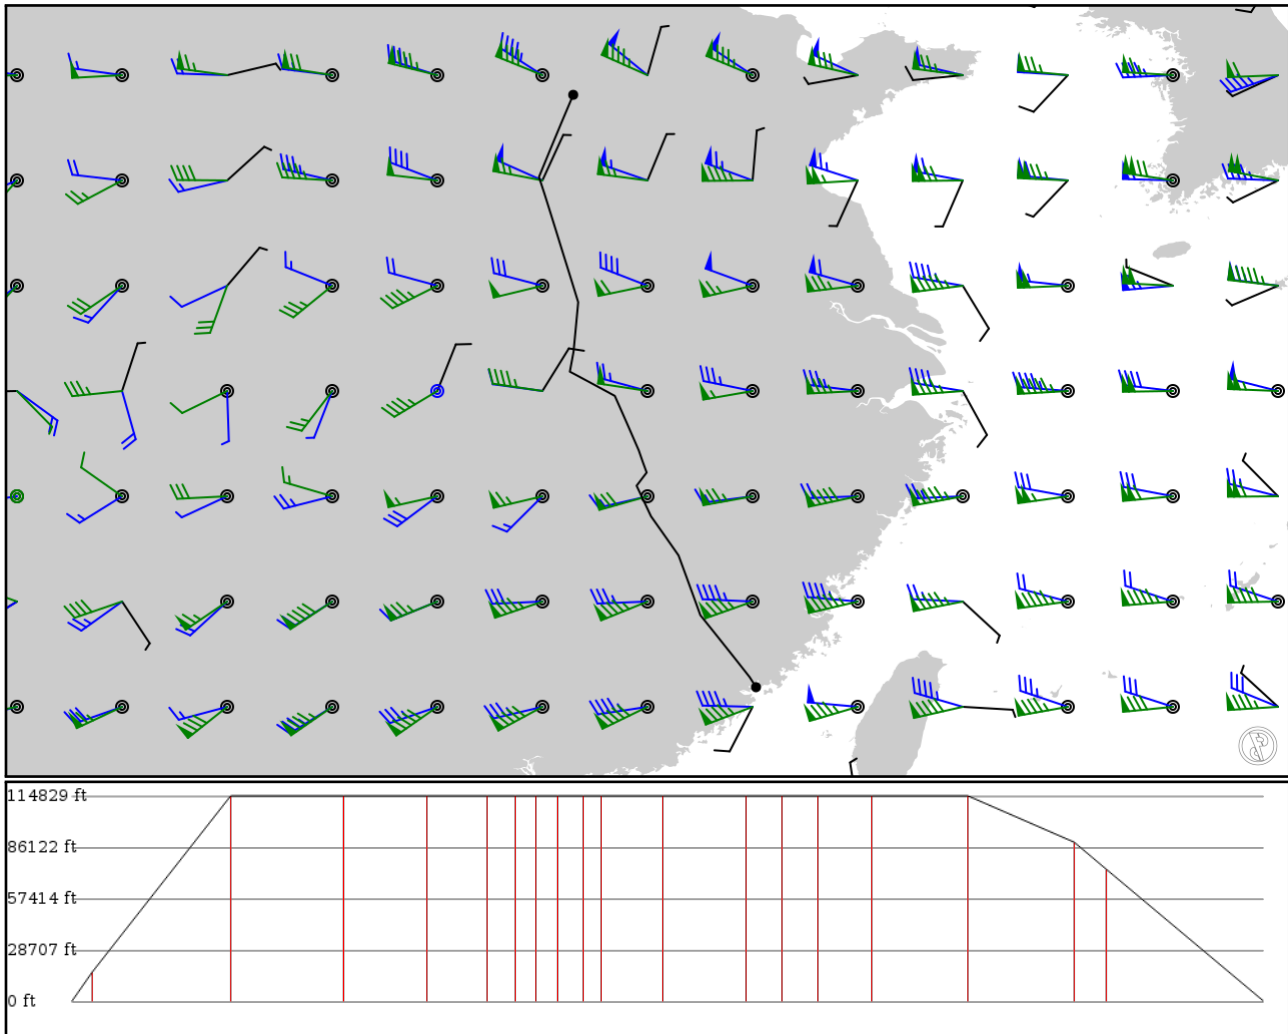

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ZSAM	-	24.54420	0 ft	-	Xiamen - Gaoqi Intl.
APT	-	118.12800	0 m	-	
KADUG	-	24.74830	5,000 ft	14	-
FIX	-	117.99800	1,524 m	-	-
2600N11700E	-	26.00000	35,000 ft	92	-
LATLON	-	117.00000	10,668 m	-	-
NF	-	27.20830	35,000 ft	76	NANFENG
NDB	-	116.55800	10,668 m	-	
2800N11600E	-	28.00000	35,000 ft	56	-
LATLON	-	116.00000	10,668 m	-	-
RP	-	28.61830	35,000 ft	40	LIJIA
NDB	-	115.70800	10,668 m	-	
NCH	W19	28.88500	35,000 ft	19	CHANGBEI
VOR	AWY-HI	115.91200	10,668 m	-	
EMRAL	W105	29.10000	35,000 ft	13	-
FIX	AWY-HI	115.83300	10,668 m	-	-
PEXEK	W105	29.33330	35,000 ft	14	-
FIX	AWY-HI	115.75200	10,668 m	-	-
LAPEN	W105	29.59670	35,000 ft	16	-
FIX	AWY-HI	115.63700	10,668 m	-	-
TULMU	W105	29.79170	35,000 ft	12	-
FIX	AWY-HI	115.55200	10,668 m	-	-
XSH	W105	30.43500	35,000 ft	41	XISHUI
VOR	AWY-HI	115.26700	10,668 m	-	
HG	W518	30.92520	35,000 ft	55	TIANHE
NDB	AWY-HI	114.35600	10,668 m	-	
HOK	W517	31.32500	35,000 ft	24	HEKOU
VOR	AWY-HI	114.43000	10,668 m	-	
ESDOS	A461	31.72170	35,000 ft	23	-
FIX	AWY-HI	114.46800	10,668 m	-	-
OBLIK	A461	32.33000	35,000 ft	36	-
FIX	AWY-HI	114.52500	10,668 m	-	-
KAMDA	W129	33.36500	35,000 ft	64	-
FIX	AWY-HI	114.20300	10,668 m	-	-
CGO	W129	34.51830	27,100 ft	71	XINZHENG
VOR	AWY-HI	113.84300	8,260 m	-	
DUBAG	B208	34.86330	22,500 ft	21	-
FIX	AWY-HI	113.73000	6,858 m	-	-
ZBHD	-	36.52470	0 ft	105	Handan
APT	-	114.42400	0 m	-	

ZSAM

Region: CHINA
Timezone: ASIA/SHANGHAI
Runways: 1

Elevation: 59 ft / 18 m
Location: 24.544200 118.128000
Magnetic Var: 4.411 W

METAR

ZSAM 141600Z 24003MPS 210V280 9999 -RA FEW012 OVC050 27/27 Q1005 NOSIG

TAF

TAF ZSAM 140902Z 1412/1512 20004G09MPS 6000 BKN023 TX33/1506Z TN26/1421Z TEMPO 1506/1512 2000 TSRA BR SCT010 FEW0

Frequencies

REC - 126.25 MHz - ATIS
TWR - 118.25 MHz - XIAMEN TWR

GND - 121.70 MHz - XIAMEN GND
APP - 121.35 MHz - XIAMEN APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	148 ft	11,163 ft	51.81	ASPHALT	495 ft	125 ft
	45 m	3,402 m	56.23		151 m	38 m
23	148 ft	11,163 ft	231.82	ASPHALT	653 ft	197 ft
	45 m	3,402 m	236.24		199 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	DME	IWF	110.30 MHz	18 nm	-	-	85 ft
				33 km	-		85 m
23	DME	IKK	109.70 MHz	18 nm	-	-	85 ft
				33 km	-		85 m
05	LOC-ILS	IWF	110.30 MHz	18 nm	51.44	-	85 ft
				33 km	55.85		85 m
23	LOC-ILS	IKK	109.70 MHz	18 nm	231.94	-	85 ft
				33 km	236.35		85 m
05	GS	IWF	110.30 MHz	10 nm	52.93	3.00	85 ft
				19 km	57.34		85 m
23	GS	IKK	109.70 MHz	10 nm	232.93	3.00	85 ft
				19 km	237.34		85 m