

RPLL

Ninoy Aquino Intl


VHHH

Hong Kong Intl

2024/05/17 2049Z

RPLL TAREM W16 AVMUP A461 CH VHHH

625.08 nm / 1157.64 km

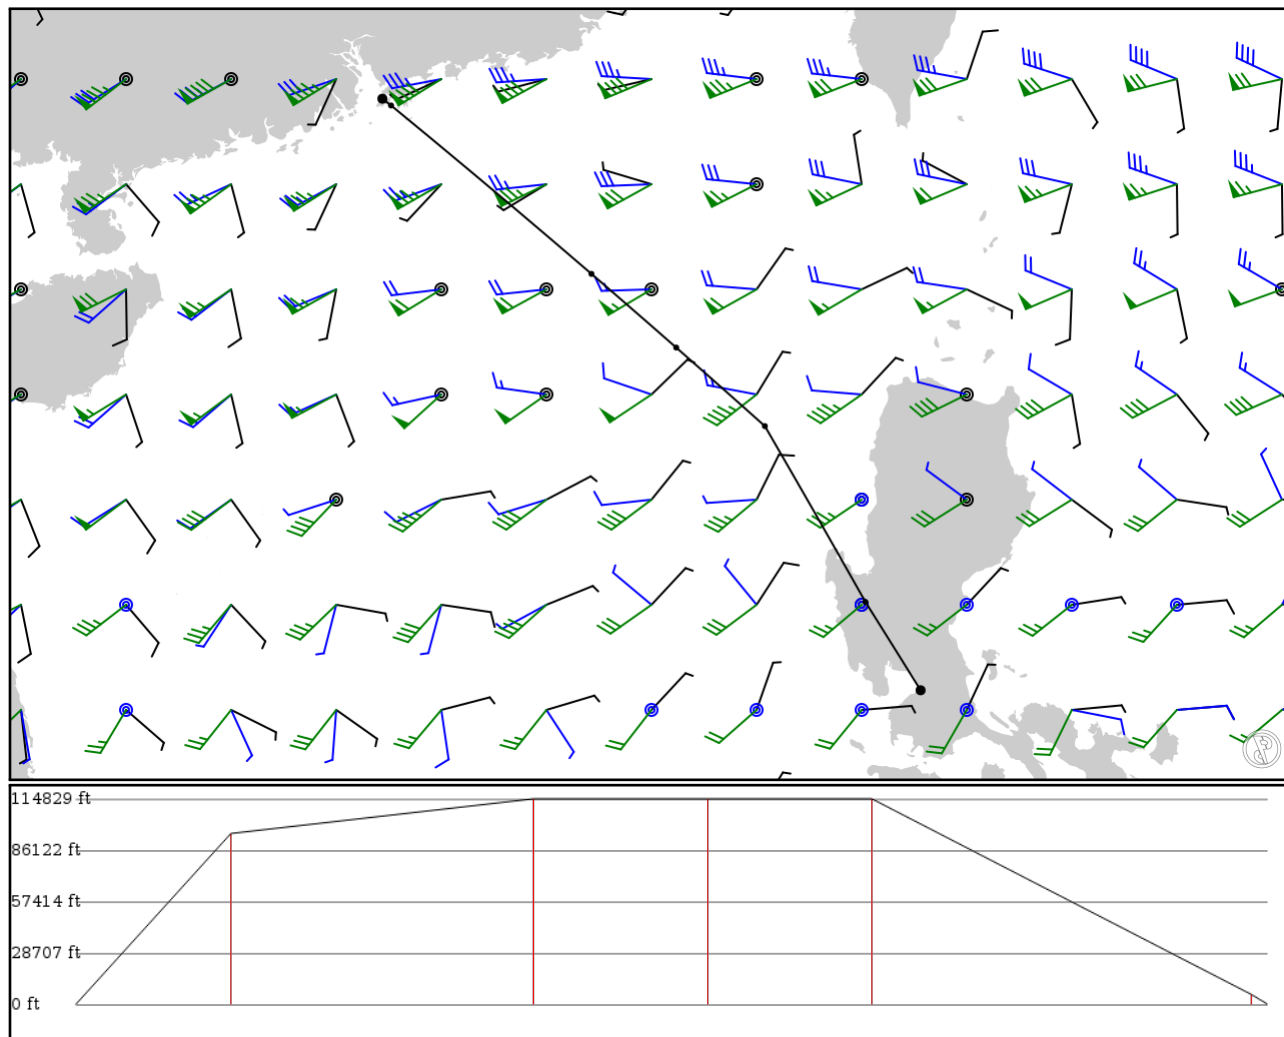

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RPLL	-	14.51130	0 ft	-	Ninoy Aquino Intl
APT	-	121.01300	0 m		
TAREM	-	15.67430	29,100 ft	81	-
FIX	-	120.28600	8,870 m		
AVMUP	W16	17.99330	35,000 ft	158	-
FIX	AWY-HI	118.95900	10,668 m		
MUMOT	A461	19.02860	35,000 ft	91	-
FIX	AWY-HI	117.79000	10,668 m		
NOMAN	A461	20.00000	35,000 ft	86	-
FIX	AWY-HI	116.67200	10,668 m		
CH	A461	22.21950	1,700 ft	199	CHEUNG CHAU
VOR	AWY-HI	114.03000	518 m		
VHHH	-	22.30890	0 ft	8	Hong Kong Intl
APT	-	113.91500	0 m		

RPLL

Region: PHILIPPINES
Timezone: ASIA/MANILA
Runways: 2

Elevation: 75 ft / 23 m
Location: 14.511300 121.013000
Magnetic Var: 2.781 W

METAR

RPLL 172000Z 10002KT 9999 FEW025 28/24 Q1008 NOSIG RMK A2977

TAF

TAF RPLL 171700Z 1718/1824 12007KT 9999 FEW025 SCT100 TX36/1806Z TN27/1721Z TEMPO 1718/1724 VRB02KT FEW023CB SCT0

Frequencies

REC - 126.40 MHz - ATIS	APP - 119.70 MHz - MANILA APPROACH
APP - 121.10 MHz - MANILA APPROACH	APP - 127.70 MHz - MANILA APPROACH
TWR - 118.10 MHz - MANILA TOWER	GND - 121.80 MHz - MANILA GROUND
GND - 121.70 MHz - MANILA RAMP	GND - 128.80 MHz - MANILA RAMP
GND - 123.25 MHz - MANILA RAMP	GND - 121.35 MHz - MANILA RAMP
CLD - 125.10 MHz - MANILA CLEARANCE DELIVERY	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	197 ft	11,742 ft	60.15	ASPHALT	545 ft	0 ft
	60 m	3,579 m	62.93		166 m	0 m
24	197 ft	11,742 ft	240.15	ASPHALT	0 ft	0 ft
	60 m	3,579 m	242.93		0 m	0 m
13	144 ft	7,729 ft	134.96	ASPHALT	804 ft	0 ft
	44 m	2,356 m	137.74		245 m	0 m
31	144 ft	7,729 ft	314.96	ASPHALT	0 ft	0 ft
	44 m	2,356 m	317.74		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	IML	109.10 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
24	DME	IMA	109.90 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
06	LOC-ILS	IML	109.10 MHz	18 nm	60.15	-	75 ft
				33 km	62.93		75 m
24	LOC-ILS	IMA	109.90 MHz	18 nm	240.15	-	75 ft
				33 km	242.93		75 m
06	GS	IML	109.10 MHz	10 nm	60.15	3.01	75 ft
				19 km	62.93		75 m
24	GS	IMA	109.90 MHz	10 nm	240.15	3.06	75 ft
				19 km	242.93		75 m

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.239 W

METAR

VHHH 172030Z 08005KT 9999 FEW030 26/20 Q1009 NOSIG

TAF

TAF VHHH 172000Z 1721/1903 09010KT 9999 FEW025 SCT045 TX29/1806Z TN25/1722Z TN24/1822Z TEMPO 1803/1808 27010KT TS

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m